

Release 380

Database Documentation | HRM & Payroll



Exact[®]
software



release 380

Database Documentation | HRM & Payroll

The information provided in this manual is intended for internal use by or within the organization of the customer only. Exact Group B.V. has carefully selected the content of this document. However, the content may not always represent reality or may become out-dated. Information may be changed or updated without notice. Exact Group B.V. may also make improvements and/or changes in the products, prices and/or the programs described in this manual at any time without notice.

Exact Group B.V. shall not be liable for the accuracy of any of the examples included and procedures described in this document, nor shall Exact be liable for any ensuing damage or loss of any nature whatsoever arising from or relating to its use.

No part of this manual may be reproduced, published and/or transmitted in any form or in any way, electronically, by print photocopy, microfilm or any other means, without the prior written consent of Exact Group B.V.

© Copyright Exact Group B.V. All rights reserved. All trademarks mentioned herein belong to their respective owners. Exact and Exact Software are a registered trademarks of Exact Group B.V.

Preface

To provide a better service when making reports or integrated business solutions, Exact has started with describing the database model of Exact Globe and Exact e-Synergy. Since the Exact Globe product line and the Exact e-Synergy product line are based on the same database model, this manual is applicable to both product lines.

The documentation of the database model is intended for a consultant who knows how Exact Globe or Exact e-Synergy works and has some knowledge about SQL database structures, but lacks sufficient knowledge and information about the Exact Globe or Exact e-Synergy database structure when making reports or integrated business solutions.

The following information will be provided for each table discussed:

1. **A brief description of the purpose of the table**

Most tables have a single purpose. Some tables have multiple purposes.

2. **The fields of the table**

What is stored in the field?

What is this field used for?

3. **The functionalities of the table**

Some tables have multiple purposes. Per table, the different functionalities (if available) are described.

4. **The technical specifications of the fields in the table**

This information can be useful in making reports or business solutions.

5. **Standard SQL queries**

With some standard SQL queries, it will be easy to retrieve the most commonly used data. The standard SQL queries supplied can also be used as the basis for extended or specific SQL queries used in reports and business solutions.

This manual will cover the main HRM database tables and Payroll database tables. The database tables described in this manual are based on version 380. It is Exact Software's intention to keep the documentation up to date with the latest developments.

Contents

Preface	III
Chapter 1: Introduction	3
Chapter 2: Humres - Resources	9
2.1 General description	9
2.2 Humres field details	9
Chapter 3: HrFree - HRM free table	31
3.1 Introduction	31
3.2 HrFree: Component group	31
3.2.1 General description	31
3.2.2 HrFree: Component group field details	31
3.3 HrFree: Job group	33
3.3.1 General description	33
3.3.2 HrFree: Job group field details	33
3.4 HrFree: Job activities	35
3.4.1 General description	35
3.4.2 HrFree: Job activities field details	35
3.5 HrFree: Scales	38
3.5.1 General description	38
3.5.2 HrFree: Scales field details	38
Chapter 4: HRCompanyPeriods - Period closing	43
4.1 General description	43
4.2 HRCompanyPeriods field details	43
Chapter 5: Hrbtl - Job titles	47
5.1 General description	47
5.2 Hrbtl field details	47

Chapter 6: HRMainFint - Main Financial Components Types	53
6.1 General Description	53
6.2 HRMainFint Field Details	53
Chapter 7: Hrfin - Financial data	57
7.1 General descriptions	57
7.2 Hrfin field details	57
Chapter 8: Hrfint - Financial component	63
8.1 General descriptions	63
8.2 Hrfint field details	63
Chapter 9: AbsenceEntitlements - Absence Entitlements	71
9.1 General description	71
9.2 AbsenceEntitlements fields details	71
Chapter 10: PublicHolidays - Public Holidays	75
10.1 General descriptions	75
10.2 PublicHolidays fields details	75
Chapter 11: WorkSchedules - Work Schedules	79
11.1 General description	79
11.2 WorkSchedules fields details	79
Chapter 12: Pwrole - Roles	83
12.1 General descriptions	83
12.2 Pwrole field descriptions	83

Chapter 13: Pwrprm - Role Rights	87
13.1 General descriptions	87
13.2 Pwrprm field descriptions	87
Chapter 14: Pwruc - Roles per company	91
14.1 General descriptions	91
14.2 Pwruc field descriptions	91
Chapter 15: HRRoles - Roles	95
15.1 General description	95
15.2 HRRoles field details	95
Chapter 16: HRRoleDefs - Role definitions	99
16.1 General description	99
16.2 HRRoleDefs field details	99
Chapter 17: HRRoleLevels - Role levels	103
17.1 General description	103
17.2 HRRoleLevels field details	103
Chapter 18: Hrsk - Skills	107
18.1 General description	107
18.2 Hrsk field details	107
Chapter 19: ResourceStatus - Resource status	111
19.1 General description	111
19.2 ResourceStatus field details	111

Chapter 20: ResourceTypes - Resource types	115
20.1 General description	115
20.2 ResourceTypes field details	115
Chapter 21: StockOptions - Options	119
21.1 General description	119
21.2 StockOptions field details	119
Chapter 22: HREffectiveDateDataLog - Effective Date Data Log	123
22.1 General Descriptions	123
22.2 HREffectiveDateDataLog field details	123
Chapter 23: HRHumresLinks - Resources Link	127
23.1 General descriptions	127
23.2 HRHumresLinks field details	127
Chapter 24: Hrwdoc - Word Merge Documents	131
24.1 General descriptions	131
24.2 Hrwdoc field details	131
Chapter 25: HRCompetencies - Competency	137
25.1 General description	137
25.2 HRCompetencies field details	137
Chapter 26: HRCompetencyRatings - HRCompetencyRatings	141
26.1 General description	141
26.2 HRCompetencyRatings field details	141

Chapter 27: HRMCompetenceGroups - HRMCompetenceGroups	145
27.1 General descriptions	145
27.2 HRMCompetenceGroups field descriptions	145
Chapter 28: HRMCompetenceProfiles - HRMCompetenceProfiles	149
28.1 General descriptions	149
28.2 HRMCompetenceProfiles field descriptions	149
Chapter 29: HRMCompetences - HRMCompetences	155
29.1 General descriptions	155
29.2 HRMCompetences field descriptions	155
Chapter 30: HRMCompetenceLinks - HRM Competence Links	161
30.1 General descriptions	161
30.2 HRMCompetenceLinks field descriptions	161
Chapter 31: RMSelectionValues - HRM Selection Values	167
31.1 General descriptions	167
31.2 HRMSelectionValues field descriptions	167
Chapter 32: HRMFormLayouts - HRMFormLayouts	171
32.1 General descriptions	171
32.2 HRMFormLayouts field descriptions	171
Chapter 33: HRMFormElements - HRMFormElements	175
33.1 General descriptions	175
33.2 HRMFormElements field descriptions	175

Chapter 34: HRProcessLogs - HR Process Logs	183
34.1 General descriptions	183
34.2 HRProcessLogs field details	183
Chapter 35: HRProcessTypes - HR Process Types	187
35.1 General descriptions	187
35.2 HRProcessTypes field details	187
Chapter 36: HRProcessRequests - HR Process Requests	195
36.1 General descriptions	195
36.2 HRProcessRequests field details	195
Chapter 37: HRFreeFields - HR Free Fields	203
37.1 General Description	203
37.2 HRFreeFields Field Details	203
Chapter 38: HREmployeePeriods - HR Employee Periods	209
38.1 General Description	209
38.2 HREmployeePeriods Field Details	209
Chapter 39: HRErrorLog - HR Error Log	213
39.1 General Descriptions	213
39.2 HRErrorLog Field Details	213
Chapter 40: HRPasswds - HR Passwords	217
40.1 General Description	217
40.2 HRPasswds Field Details	217

Chapter 41: Hrloc - Contract locations	221
41.1 General Description	221
41.2 Hrloc Field Details	221
Chapter 42: CompanyClassNames - Organization groups	227
42.1 General description	227
42.2 CompanyClassNames field details	227
Chapter 43: CompanyClasses - Organization subgroups	231
43.1 General description	231
43.2 CompanyClasses field details	231
Chapter 44: Notes - Notes	235
44.1 General description	235
44.2 Notes field details	235
Chapter 45: DeletionLogs - Deletion Logs	239
45.1 General description	239
45.2 DeletionLogs field details	239
Chapter 46: HrComponents - Components	243
46.1 General description	243
46.2 HrComponents field details	243
46.3 Country specific field details - Netherlands (NL)	257
46.4 Country specific field details - China (CN)	263
46.5 Country specific field details - Malaysia (MY)	269
46.6 Country specific field details - Middle East (AE)	272
46.7 Commission method components	290

Chapter 47: HrComp_Resource - Resource specific components	295
47.1 General description	295
47.2 HrComp_Resource field details	295
47.3 Country specific field details - Netherlands (NL)	303
47.4 Country specific field details - China (CN)	304
47.5 Country specific field details - Malaysia (MY)	305
47.6 Country specific field details - Middle East (AE)	306
Chapter 48: HrComp_Trans - Payroll transactions	309
48.1 General description	309
48.2 HrComp_Trans field details	309
48.3 Country specific field details - Netherlands (NL)	324
48.4 Country specific field details - China (CN)	324
48.5 Country specific field details - Malaysia (MY)	330
48.6 Country specific field details - Middle East (AE)	334
Chapter 49: HrComponentItemLinks - Component relations	345
49.1 General description	345
49.2 HrComponentItemLinks field details	345
49.3 Commission method components	347
Chapter 50: HrPayroll - Resource payroll settings	351
50.1 General description	351
50.2 HrPayroll field details	352
50.3 Country specific field details - Netherlands (NL)	369
50.4 Country specific field details - China (CN)	412
50.5 Country specific field details - Malaysia (MY)	414
50.6 Country specific field details - Middle East (AE)	419
Chapter 51: HrPayrollDeclarations - HrPayrollDeclarations	425
51.1 General description	425
51.2 HrPayrollDeclarations field details	425
51.3 Country specific field details - Netherlands (NL)	441

Chapter 52: Field properties	467
52.1 Humres	467
52.2 HrFree	472
52.3 HRCompanyPeriods	473
52.4 Hrjbt1	474
52.5 HRMainFint	475
52.6 Hrfin	475
52.7 Hrfint	476
52.8 AbsenceEntitlements	477
52.9 PublicHolidays	478
52.10 WorkSchedules	478
52.11 Pwrole	479
52.12 Pwrprm	479
52.13 Pwruc	480
52.14 HRRoles	480
52.15 HRRoleDefs	481
52.16 HRRoleLevels	481
52.17 Hrsk	481
52.18 ResourceStatus	482
52.19 ResourceTypes	482
52.20 StockOptions	482
52.21 HREffectiveDateDataLog	483
52.22 HRHumresLinks	484
52.23 Hrwdoc	484
52.24 HRCompetencies	485
52.25 HRCompetencyRatings	485
52.26 HRMCompetenceGroups	485
52.27 HRMCompetenceProfiles	486
52.28 HRMCompetences	486
52.29 HRMCompetenceLinks	487
52.30 HRMSelectionValues	488
52.31 HRMFormLayouts	488
52.32 HRMFormElements	489
52.33 HRProcessLogs	490
52.34 HRProcessTypes	490
52.35 HRProcessRequests	492
52.36 HRFreeFields	493
52.37 HREmployeePeriods	494
52.38 HRErrorLog	494
52.39 HRPasswds	495
52.40 Hrloc	495

52.41	CompanyClassNames	496
52.42	CompanyClasses	496
52.43	Notes	496
52.44	DeletionLogs	497
52.45	HrComponents	498
52.46	HrComp_Resource	501
52.47	HrComp_Trans	503
52.48	HrComponentItemLinks	506
52.49	HrPayroll	506
52.50	HRPayrollDeclarations	512

Chapter 53: Sample SQL queries		521
53.1	Humres	521
53.2	HrFree	522
53.3	HRCompanyPeriods	522
53.4	Hrjbt1	523
53.5	HRMainFint	523
53.6	Hrfin	523
53.7	Hrfint	523
53.8	AbsenceEntitlements	524
53.9	PublicHolidays	524
53.10	WorkSchedules	525
53.11	Pwrole	525
53.12	Pwrprm	525
53.13	Pwruc	526
53.14	HRRoles	526
53.15	HRRoleDefs	526
53.16	HRRoleLevels	526
53.17	Hrsk	526
53.18	ResourceStatus	527
53.19	ResourceTypes	527
53.20	StockOptions	527
53.21	HREffectiveDateDataLog	528
53.22	HRHumresLinks	528
53.23	Hrwdoc	528
53.24	HRCompetencies	528
53.25	HRComptencyRatings	528
53.26	HRMCompetenceGroups	529
53.27	HRMCompetenceProfiles	529
53.28	HRMCompetences	529

53.29	HRMCompetenceLinks	529
53.30	HRMSelectionValues	529
53.31	HRMFormLayouts	530
53.32	HRMFormElements	530
53.33	HRProcessLogs	530
53.34	HRProcessTypes	530
53.35	HRProcessRequests	530
53.36	HRFreeFields	530
53.37	HREmployeePeriods	531
53.38	HRErrorLog	531
53.39	HRPasswds	531
53.40	Hrloc	531
53.41	CompanyClassNames	531
53.42	CompanyClasses	532
53.43	Notes	532
53.44	DeletionLogs	532
53.45	HrComponents	533
53.46	HrComp_Resource	534
53.47	HrComp_Trans	535
53.48	HrComponentItemLinks	536
53.49	HrPayroll	537
53.50	HRPayrollDeclarations	538



Chapter 1 | Introduction

1. Introduction

Human resources play an important role within the applications of Exact Software. Together with machines, they are the most important resource type. In order to realize the correct registration of a human resource, several database tables are used to register the human resources and all resource related data. The following are some of the main HRM tables and functionalities described in this document:

Humres - This table stores the actual human resource data.

HrFree - This table stores the component groups, job groups, job activities and scales.

Hrjbt1 - This table stores the job titles.

AbsenceEntitlements - This table stores the absences entitlement.

Public Holidays - This table stores different types of public holidays.

WorkSchedules - This table stores different types of work schedules.

The information pertaining to human resources is the basis of payroll processing as employees hired by a company will be paid wages in various ways. Therefore, database tables are also made available to store the various payroll related data that are linked to the HRM database tables. Understanding the payroll process enables a clearer view of the usage of the database tables. The payroll process can be divided into the following steps:

1. Create payroll components
2. Define payroll settings per resource
3. Link components to resources with resource specific data
4. Start the payroll calculation (by generating and calculating the payroll entries)
5. Approve the calculated payroll entries (only for Exact Globe Enterprise and if defined in the settings)
6. Process the payroll calculation (which will create the financial transactions and the outstanding items)
7. Make the payroll payments via Cash Flow
8. Create official reports to third parties (if applicable)

This documentation will describe the Payroll database tables that are used in the first six steps (excluding the financial transactions). The following are some of the main Payroll database tables described in this documentation:


HrComponents - Components


HrComp_Resource - Resource specific components

HrComp_Trans - Payroll transactions

HrComponentItemLinks - Component item links

HrPayroll - Resource payroll settings

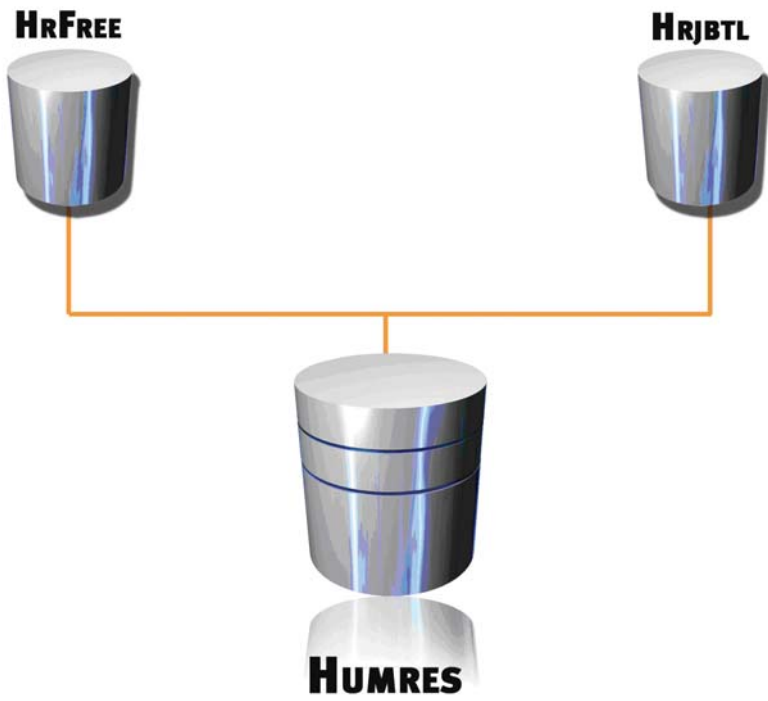

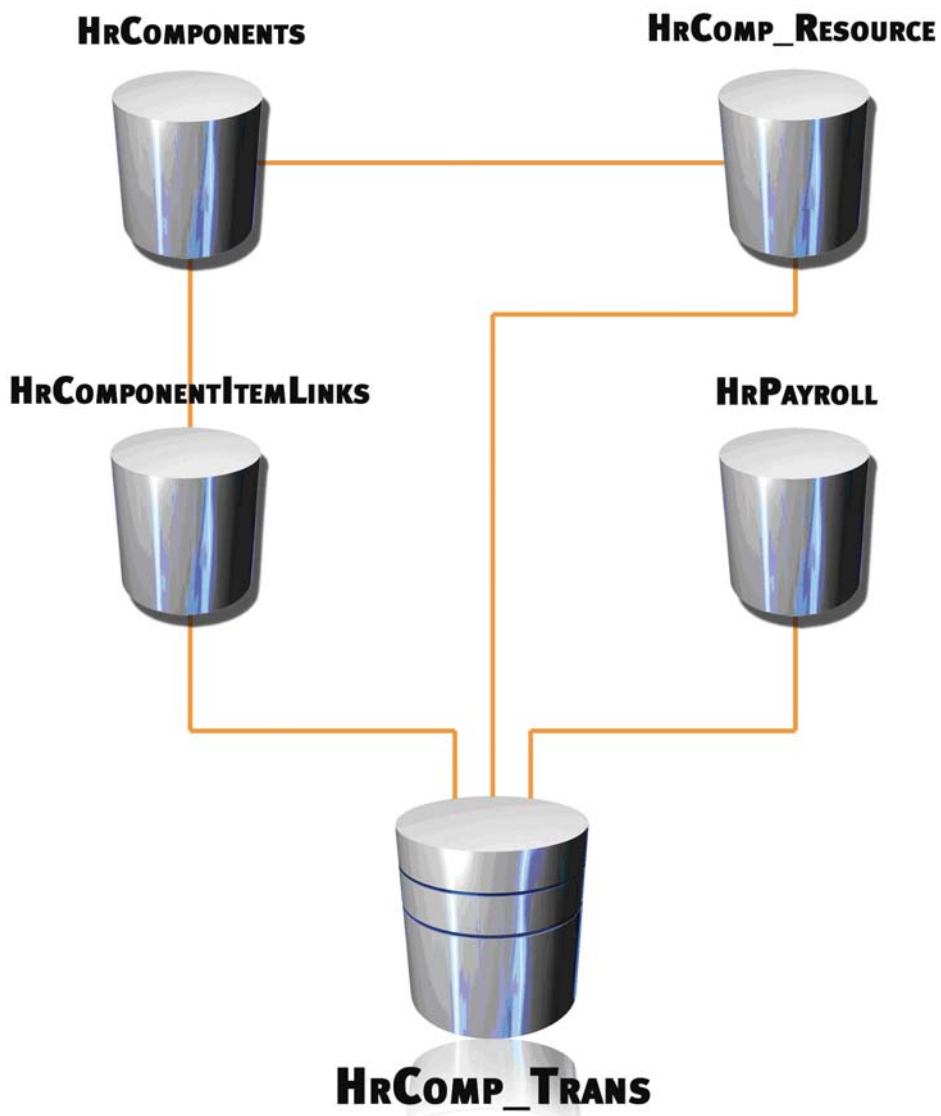



Chapter 2 | Humres - Resources

2. Humres - Resources

2.1 General description

The [Humres] table is the central table for all HRM-related information. The [Humres] table stores the organizational and personal details of all resources. A resource in this context means employees (including contractors, students and temporary staff), applicants and reseller's contact persons.

The type of resource is identified by the value stored in the [Humres.Emp_stat] field.

The [Humres] table is also used to validate users:

- In Exact Globe, when a user attempts to log in, his user name is first validated against known user ID's (the [Humres.Usr_ID] field) in the [Humres] table. If a match is found, the system then checks to see if the user is allowed to access the database (field [Humres.BackOfficeBlocked] field).
- In e-Synergy, when a user attempts to log in, his user name is first validated against known user ID's (the [Humres.Usr_ID] field) in the [Humres] table. If a match is found, the system then checks to see if the user has the appropriate security level (the [Humres.Job_Level] field) and has not been denied access (the [Humres.Blocked] field). The system then directs the user to either the employee portal or the reseller portal, based on the security level of the resource.

Note that payroll information is not stored in the [Humres] table. For more information about this, see the Payroll Database Documentation.

The [Humres] table stores several entities:

- Applicants.
- Vacancies.
- Employees.
- Contact persons of partners which have portal access.
- Contact persons of customers which have portal access.

2.2 Humres field details

Absent - Out of office

The [Humres.Absent] field indicates if the resource is absent. The value "1" indicates that the resource is absent. The value "0" indicates that the resource is present.

Note! If a request with the option "out of office" marked is created for a resource, the value in the [Humres.Absent] field will be changed by the HRM background job.

Addr_no - Address number

The [Humres.Addr_no] field stores the house number of the resource's private address.

Addr_xtra - Suffix

The [Humres.Addr_xtra] field stores the suffix of the resource's private address.

AdjustedHireDate - Adjusted Hire Date

The [Humres.AdjustedHireDate] field stores the adjusted hire date by minus the amount of time off with the actual hire date. Adjusted Hire Date is needed by HR because of things layoff and rehire, and the Family Leave Act in the US that allows employees to take time off without pay. Most companies will not include this time in seniority calculations for benefit programs. Thus they adjust the actual hire date by the amount of time off and enter in the adjusted hire date. They then calculate any seniority based benefit plan on the adjusted hire date.

Note! The [Humres.AdjustedHireDate] field is only used in US legislation.

Adres1 - Address 1

The [Humres.Adres1] field stores the first line of address details of the resource's private address.

Adres2 - Address 2

The [Humres.Adres2] field stores the second line of address details of the resource's private address.

Adv_Code - Processed flag

The [Humres.Adv_Code] field indicates if a resource is already been set to inactive by the HRM background job. The HRM background job will automatically set the status of a resource to inactive if necessary. The HRM background job will only take resources into account where the [Humres.Adv_Code] field is "0".

Affix - Suffix title

The [Humres.Affix] field stores the suffix title of the name of the resource. The user can select one of the values (like "Baron", "Baronesse", "Erbprinz", etc.) that are predefined by law in Germany. These values are used on declarations to social security offices.

Note! The [Humres.Affix] field is only used in German legislation and is needed for the DUEV certification.

ApplicationStage - Vacancy Application Stage

The [Humres.ApplicationStage] field stores Application status or rather stages of a vacancy.

Assistant - Assistant

The [Humres.Assistant] field stores the ID of the assistant of the resource. The [Humres.Assistant] field refers to the [Humres.Res_ID] field.

BackOfficeBlocked - Blocked for back office

The [Humres.BackOfficeBlocked] field indicates if the resource has access to Exact Globe system. The value "1" indicates that the user is blocked. The value "0" indicates that the user has access rights.

Bankac_0 - Bank account number 1 (default)

The [Humres.Bankac_0] field stores the first bank account number of the resource. In Exact Globe, the [Humres.Bankac_0] field stores the bank account number that is defined as the default bank account number of the resource. In e-Synergy the [Humres.Bankac_0] field stores the bank account number that is defined as the first bank account. The [Humres.Bankac_0] field can only be filled if the [Humres.Crdnr] field is filled for the resource. The [Humres.Bankac_0] field refers to the [Bnkacc.Banknr] field and the [Bnkkop.Bank_rek] field.

Bankac_1 - Bank account number 2

The [Humres.Bankac_1] field stores the second bank account number of the resource. In Exact Globe, the [Humres.Bankac_1] field is filled when a second bank account number is imported with the import of resource data via XML.

In e-Synergy the [Humres.Bankac_1] field stores the bank account number that is defined as the second bank account. The [Humres.Bankac_1] field refers to the [Bnkacc.Banknr] field and the [Bnkkop.Bank_rek] field.

BankingLimit - Payment limit

The [Humres.BankingLimit] field is not used.

Birth_Affix - Birth name suffix title

The [Humres.Birth_Affix] field stores the suffix title of the birth name of the resource.

The user can select one of the values (like "Baron", "Baronesse", "Erbprinz", etc.) that are predefined by law in Germany. These values are used on declarations to social security offices.

Note! The [Humres.Birth_Affix] field is only used in German legislation and is needed for the DUEV certification.

Birth_Prefix - Birth name prefix

The [Humres.Birth_Prefix] field stores the prefix of the birth name of the resource. The user can select one of the values (like "Von", "Von der", "Auf dem", etc.) that are predefined by law in Germany. These values are used on declarations to social security offices.

Note! The [Humres.Birth_Prefix] field is only used in German legislation and is needed for the DUEV certification.

Blocked - Blocked

The [Humres.Blocked] field indicates if the resource has access to e-Synergy system. The value "1" indicates that the user is blocked. The value "0" indicates that the user has access rights.

BTW_Nummer - VAT number

The [Humres.BTW_Nummer] field stores the NIT code. It is a code which can be assimilated to a VAT number. It is only used in Colombian legislation.

Buyer - Buyer

The [Humres.Buyer] field indicates if the resource is a purchase agent or not. The value "0" indicates that the resource is not a purchase agent. The value "1" indicates that the resource is a purchase agent. The [Humres.Buyer] field is updated when the purchase agent role is assigned to or removed from a resource.

Note! The [Humres.Buyer] is only used in Exact Globe.

ChildBirthDate1 - Date of birth child 1

The [Humres.ChildBirthDate1] field is not used.

ChildBirthDate2 - Date of birth child 2

The [Humres.ChildBirthDate2] field is not used.

ChildBirthDate3 - Date of birth child 3

The [Humres.ChildBirthDate3] field is not used.

ChildBirthDate4 - Date of birth child 4

The [Humres.ChildBirthDate4] field is not used.

ChildBirthDate5 - Date of birth child 5

The [Humres.ChildBirthDate5] field is not used.

ChildName1 - Name child 1

The [Humres.ChildName1] field is not used.

ChildName2 - Name child 2

The [Humres.ChildName2] field is not used.

ChildName3 - Name child 3

The [Humres.ChildName3] field is not used.

ChildName4 - Name child 4

The [Humres.ChildName4] field is not used.

ChildName5 - Name child 5

The [Humres.ChildName5] field is not used.

Classification - Classification

The [Humres.Classification] field stores the user-definable classification.

Note! The [Humres.Classification] field is only used in US legislation.

Cmp_wwn - Account Guid

The [Humres.Cmp_wwn] field stores the unique identifier value (Guid) of the account to whom the resource is linked. This value is automatically generated when a contact person of an account is granted portal access to e-Synergy. Depending on the type of resource (the [Humres.Emp_Type] field), the [Humres.Cmp_wwn] field refers to a reseller/supplier or a customer. The user cannot change this field.

Comp - Division

The [Humres.Comp] field stores the division to which the resource belongs. The [Humres.Comp] field refers to the [Bedryf.Bednr] field.

Cont_End_Date - Contract end date

The [Humres.Cont_End_Date] field stores the contract end date of the resource. The contract end date is the last day of employment as specific in the employment contract. This is different from the departure date (the [Humres.Ldatuitdienst] field).

CostCenter - Cost center

The [Humres.CostCenter] field stores the cost center of the resource. The cost center of a resource must be linked to the division of the resource. The [Humres.CostCenter] field refers to the [Kstpl.KstplCode] field.

CrCard_expd - Credit card expiry date

The [Humres.CrCard_expd] field is not used.

CrCard_no - Credit card number

The [Humres.CrCard_no] field is not used.

CrCard_Type - Credit card type

The [Humres.CrCard_Type] field is not used.

Crdnr - Creditor number

The [Humres.Crdnr] field stores the creditor number linked to the resource. The [Humres.Crdnr] field refers to the [Cicmpy.Crdnr] field (where the [Humres.Comp] field is equal to the [Cicmpy.Administration] field).

Division - Division

The [Humres.Division] field stores the division code. The [Humres.Division] field stores the numeric value of the [Bedryf.Bednr] field. The [Humres.Division] field is added for future functionality.

Email - E-mail address

The [Humres.Email] field stores the personal e-mail address of the resource.

Emp_stat - Employee status

The [Humres.Emp_stat] field stores the employment status of the resource. The status is automatically set depending on the employment start date and contract end date of the resource. The [Humres.Emp_stat] field refers to the [ResourceStatus.Status] field and to the DDTests table which contains the following values for this field:

Value	Description	Resource type	Remark
A	Active	A, C, E, K, R, S, T, V	Start date < Today and Contract end date > Today or NULL
F	Fulfilled	V	
H	Hired	A, E	Start date > Today
I	Inactive	A, C, E, R, S, T, V	Contract end date < Today
R	Rejected	A, V	Application is rejected

Note! The employee status will be set via the HRM background job for the "Active" and "Inactive" status, depending on the [Humres.Ldatindienst] and the [Humres.Ldatuitdienst] fields.

Emp_statd - Employee status date

The [Humres.Emp_statd] field is not used.

Emp_Type - Employee type

The [Humres.Emp_Type] field indicates the type of the resource. The [Humres.Emp_Type] field refers to the [ResourceTypes.Type] field and to the DDTests table which contains the following values for this field:

Value	Description	Remark
A	Applicant	
C	Contractor	
E	Employee	
K	Customer	Used in e-Synergy only. The [Humres.Job_level] field is "1".
R	Partner	Used in e-Synergy only. The [Humres.Job_level] field is "2".
S	Student	
T	Temporary	
V	Vacancy	The [Humres.FullName] is filled with "Vacancy".

Extra_Code - Extra code

The [Humres.Extra_Code] field is not used.

Extra_Text - Extra text

The [Humres.Extra_Text] field is not used.

Exttar - External rate

The [Humres.Exttar] field is not used.

Faxnr - Fax number

The [Humres.Faxnr] field stores the office fax number of the resource.

First_Name - First name

The [Humres.First_Name] field stores the first name of the resource.

FreeField1 - Free field 1

The [Humres.FreeField1] field stores information that does not correspond to any set value. Free field 1 is the first of 20 free fields that store such data. Users can enter any information in the free fields.

Note! The free fields are available for employees (so where the [Humres.Emp_Type] field is "E", "C", "S" or "T"). In e-Synergy, the free fields are only available when a free field is activated by defining a label for the free field. In Exact Globe the free fields are always available.

FreeField2 - Free field 2

The [Humres.FreeField2] field stores information that does not correspond to any set value. Free field 2 is the second of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField3 - Free field 3

The [Humres.FreeField3] field stores information that does not correspond to any set value. Free field 3 is the third of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField4 - Free field 4

The [Humres.FreeField4] field stores information that does not correspond to any set value. Free field 4 is the fourth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField5 - Free field 5

The [Humres.FreeField5] field stores information that does not correspond to any set value. Free field 5 is the fifth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField6 - Free field 6

The [Humres.FreeField6] field stores information that does not correspond to any set value. Free field 6 is the sixth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField7 - Free field 7

The [Humres.FreeField7] field stores information that does not correspond to any set value. Free field 7 is the seventh of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField8 - Free field 8

The [Humres.FreeField8] field stores information that does not correspond to any set value. Free field 8 is the eighth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField9 - Free field 9

The [Humres.FreeField9] field stores information that does not correspond to any set value. Free field 9 is the ninth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField10 - Free field 10

The [Humres.FreeField10] field stores information that does not correspond to any set value. Free field 10 is the tenth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField11 - Free field 11

The [Humres.FreeField11] field stores information that does not correspond to any set value. Free field 11 is the eleventh of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField12 - Free field 12

The [Humres.FreeField12] field stores information that does not correspond to any set value. Free field 12 is the twelfth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField13 - Free field 13

The [Humres.FreeField13] field stores information that does not correspond to any set value. Free field 13 is the thirteenth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField14 - Free field 14

The [Humres.FreeField14] field stores information that does not correspond to any set value. Free field 14 is the fourteenth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField15 - Free field 15

The [Humres.FreeField15] field stores information that does not correspond to any set value. Free field 15 is the fifteenth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField16 - Free field 16

The [Humres.FreeField16] field stores information that does not correspond to any set value. Free field 16 is the sixteenth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField17 - Free field 17

The [Humres.FreeField17] field stores information that does not correspond to any set value. Free field 17 is the seventeenth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField18 - Free field 18

The [Humres.FreeField18] field stores information that does not correspond to any set value. Free field 18 is the eighteenth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField19 - Free field 19

The [Humres.FreeField19] field stores information that does not correspond to any set value. Free field 19 is the nineteenth of 20 free fields that store such data. Users can enter any information in the free fields.

FreeField20 - Free field 20

The [Humres.FreeField20] field stores information that does not correspond to any set value. Free field 20 is the twentieth of 20 free fields that store such data. Users can enter any information in the free fields.

Fte - FTE

The [Humres.Fte] field stores the Full Time Equivalent (FTE) rate. A resource working the same hours as the division's working hours will have an FTE value of 1.00. This field is used when granting absence entitlements. The FTE must be equal to or less than 1.

FullName - Full name

The [Humres.FullName] field stores the full name of the resource. The full name is derived by concatenating the values of the first name ([Humres.FirstName]), the middle name ([Humres.Middle_Name]), the last name ([Humres.LastName]) and the maiden name ([Humres.Maiden_Name]).

FuncNivo - Previous rating

The [Humres.FuncNivo] field stores the previous performance rating of a resource. The values in this field can be "A", "B", "C", "D" or "E".

Geb_ldat - Date of birth

The [Humres.Geb_ldat] field stores the date of birth of the resource.

Geb_pl - Place of birth

The [Humres.Geb_pl] field stores the place of birth of the resource.

ID - ID

The [Humres.ID] field stores the system generated database record identification number. This field is not functionally used.

Identiteit - Identity

The [Humres.Identiteit] field is not used.

Initialen - Initials

The [Humres.Initialen] field stores the initials of the resource.

Internetac - ISP account

The [Humres.Internetac] field stores the Internet Service Provider (ISP) account of the resource. It is only used in e-Synergy.

Inttar - Internal rate

The [Humres.Inttar] field stores the internal rate of the resource.

Note! The [Humres.Inttar] field is only used in Exact Globe.

InvoiceLimit - Sales invoice limit

The [Humres.InvoiceLimit] field stores the limit up to which the resource can approve sales invoices.

ISO_Taalcd - ISO language

The [Humres.ISO_Taalcd] field stores the ISO code of the language of the resource. The [Humres.ISO_Taalcd] field refers to the [Taal.TaalCode] field.

IsPersonalAccount - Personal account

The [Humres.IsPersonalAccount] field indicates if the resource makes use of a personal account. It is only used in Colombian legislation.

ItemCode - Item code

The [Humres.ItemCode] field stores the item code that is linked to the resource as hour item. The sales price of this hour item will be used in invoice proposals. With this item code it is possible to use a rate per resource in projects. The [Humres.ItemCode] field refers to the [Items.ItemCode] field.

Job_Level - Security level

The [Humres.Job_Level] field stores the security level of the resource. The following values indicate the type of resource.

Value	Remark
0	Public
1	Customer
2	Customer specific
3	Partner
4	Partner specific
10 - higher	Internal user

Job_Title - Job title

The [Humres.Job_Title] field stores the job title of the resource. The [Humres.Job_Title] field refers to the [Hrjbtl.Job_Title] field.

JobCategory - Job category

The [Humres.JobCategory] field stores the user-definable job category.

Note! The [Humres.JobCategory] field is only used in US legislation.

Kamer - Room

The [Humres.Kamer] field stores the office room number of the resource.

Kstrdr_Code - Cost unit

The [Humres.Kstrdr_Code] field stores the code of the cost unit to which the resource is linked. The [Humres.Kstrdr_Code] field refers to the [Kstrdr.KstrdrCode] field.

Land_ISO - ISO country

The [Humres.Land_ISO] field stores the ISO country code of the personal address of the resource. The [Humres.Land_ISO] field refers to the [Land.LandCode] field.

Land_ISO2 - Country of origin

The [Humres.Land_ISO2] field stores the ISO country code of the place of birth of the resource. It is only used in German legislation. The [Humres.Land_ISO2] field refers to the [Land.LandCode] field.

Ldatindienst - Employment start date

The [Humres.Ldatindienst] field stores the start date of the employment of the resource.

Ldatuitdienst - Departure date

The [Humres.Ldatuitdienst] field stores the departure date. The departure date is the date on which a resource physically leaves the company. It can be earlier than the contract end date. The HRM Background job processes all inactive resources based on the departure date.

Loc - Location

The [Humres.Loc] field stores the physical location of the resource. The physical location can differ from the contractual location (the [Humres.MainLoc] field). The [Humres.Loc] field refers to the [Hrloc.Loc] field.

Maiden_Name - Maiden name

The [Humres.Maiden_Name] stores the maiden (birth) name of the resource.

Mail - e-mail

The [Humres.Mail] field stores the office e-mail address of the resource. In e-Synergy, the domain portion of the e-mail address is validated against the list of valid domains entered in the HRM settings. If the domain is valid, the e-mail account of the resource will be updated by the HRM background job in the Microsoft Exchange list of e-mail addresses. This only happens if the e-Synergy setting 'Create Exchange Mailbox' is active.

MainLoc - Main location

The [Humres.MainLoc] field stores the contractual location of the resource. The contractual location is used to associate public holidays to a resource. The contractual location can differ from the physical location (the [Humres.Loc] field). The [Humres.MainLoc] field refers to the [Hrloc.Loc] field.

Mar_Date - Date marital status

The [Humres.Mar_Date] field stores the date of the current marital status of the resource. The [Humres.Mar_Date] field is only filled when the [Humres.Mar_stat] has the value "L", "M" or "W".

Mar_stat - Marital state

The [Humres.Mar_stat] field stores the marital state of a resource. The [Humres.Mar_stat] field refers to the DDTests table which contains the following values for this field:

Value	Description
D	Divorced
L	Living together
M	Married
S	Single
W	Widowed

Middle_Name - Middle name

The [Humres.Middle_Name] field stores the middle name of a resource.

Note! The [Humres.Middle_Name] field is not used in Spanish legislation.

Mobile_Short - Mobile shortcut

The [Humres.Mobile_Short] field stores the extension of the office mobile telephone number of the resource.

MSNID - MSN ID

The [Humres.MSNID] field stores the MSN ID of the resource. The [Humres.MSNID] field is used to start a Windows messenger or MSN messenger conversation.

Note! The [Humres.MSNID] field is only used in e-Synergy.

Mv1 - Gender

The [Humres.Mv1] field stores the gender of the resource. The [Humres.Mv1] field refers to the DDTests table which contains the following values for this field:

Value	Description
M	Male
O	Unknown
V	Female

Nat - Nationality

The [Humres.Nat] field stores the nationality of the resource. The [Humres.Nat] field refers to the [Land.LandCode] field.

Notes - Notes

The [Humres.Notes] field stores the notes of an applicant or vacancy. This note field can be used for a note or for an applicant to cut & paste his/her resume into this notes field. When an applicant applies for a job from the public web-site, there is no possibility for an applicant to attach a document (with a resume). When an applicant is hired and changes to a resource, the content of the notes field will automatically be created as a document in the [BacoDiscussion] table which is the central document table. The [Humres.Notes] field refers to the [Notes.ID] field.

OldNTFullName - Old NT full name

The [Humres.OldNTFullName] field stores the Windows user name for each resource. In the event that the resource subsequently changes his/her name, the system will use this initial name to trace the resource to update other information when required. Without this field, the system would not be able to match resources in e-Synergy to Windows Active Directory users, because user full names are used as keys in Active Directory.

Partner - Partner

The [Humres.Partner] field stores the ID of the resource who fulfilled the vacancy. The [Humres.Partner] field is only available for vacancies (so where the [Humres.Emp_Type] field = "V").

PartnerBirthDate - Date of birth partner

The [Humres.PartnerBirthDate] field is not used.

Payempl - Payroll employee

The [Humres.Payempl] field indicates if the resource is used in e-Payroll. The value "1" indicates that the resource is used in e-Payroll; the value "0" indicates the resource is not used in e-Payroll. The [Humres.Payempl] field will automatically be set to "1" when payroll data is created for the resource (after checking if the birth date is filled and if a creditor code is linked to the resource). Upon saving payroll data, the application will trigger to auto-generate a creditor code to this resource (if not already linked) and the [Humres.Payempl] field will be set to 1.

Picture - Picture

The [Humres.Picture] field stores the binary format of the picture linked to the resource.

PictureFileName - Picture file name

The [Humres.PictureFileName] field stores the name of file that is linked to the resource as picture [Humres.Picture]. In Exact Globe, the full path of the file name is stored in this field.

PortalCreator - Portal Creator

The [Humres.PortalCreator] field stores the resource ID that grants or revokes the portal access of a contact person. All contact persons who have been granted portal access, will have a record created in [HUMRES] table.

Note! NT Account will be created or deleted according to the actions of portal access being granted or revoked.

Postcode - Postal code

The [Humres.Postcode] field stores the postal code of the personal address of the resource.

Prafd_Code - Department code

The [Humres.Prafd_Code] field is not used.

PredCode - Title

The [Humres.PredCode] field stores the title of the resource. The user can select a title from a list of titles that can be maintained by the user. The title stored in the [Humres.PredCode] field is used as the salutation of the resource. The [Humres.PredCode] field refers to the [Pred.PredCode] field.

PredCode2 - Second title

The [Humres.PredCode2] field stores the free definable title of the resource. The user can fill this field with any value. Contrary to the [Humres.PredCode] field, the [Humres.PredCode2] field should be used to store titles like academic titles that can be used on declarations.

Note! The [Humres.PredCode2] field is only used in German legislation and is needed for the DUEV certification.

Prefix - Prefix

The [Humres.Prefix] field stores the prefix of the name of the resource. The user can select one of the values (like "Von", "Von der", "Auf dem", etc.) that are predefined by law in Germany. These values are used on declarations to social security offices.

Note! The [Humres.Prefix] field is only used in German legislation and is needed for the DUEV certification.

Prob_endd - End date probationary period

The [Humres.Prob_endd] field stores the end date of the probationary period of the resource. The [Humres.Prob_endd] field must lie behind the employment start date (the [Humres.Ldatindienst] field) and before or equal to the employment end date (the [Humres.Ldatuitdienst] field). The [Humres.Prob_endd] field is default filled with a date that is the result of the [Humres.Prob_per] field and the [Humres.Prob_pert] field.

Prob_per - Probationary period

The [Humres.Prob_per] field stores the number of periods of the probation of the resource. The number of periods in combination with the type of period (the [Humres.Prob_pert] field) will supply the default value of the end date of the probationary period (the [Humres.Prob_endd] field).

Prob_pert - Probationary period type

The [Humres.Prob_pert] field stores the type of period. The [Humres.Prob_pert] field refers to the DDTests table which contains the following values for this field.

Value	Description
D	Days
M	Months
W	Weeks
Y	Years

ProcessedByBackgroundJob - Processed by background job

The [Humres.ProcessedByBackgroundJob] field indicates if the background job (Hrbgjobs) has created or deleted an NT account for the resource. The field is also used to indicate whether the password of a resource is going to be reset. The [Humres.ProcessedByBackgroundJob] field can contain the following values:

Value	Description
0	The NT account has not yet been created (for a new resource) or is deleted (for example for an inactive resource).
1	The NT account has been created or the password of the resource is reset.
2	The password of the resource will be reset.

Projempl - Project employee

The [Humres.Projempl] field is not used.

Pur_Limit - Purchase limit

The [Humres.Pur_Limit] field stores the limit up to which the resource can approve purchase orders.

Race - Race

The [Humres.Race] field stores the race of the resource. It is only used in U.S.A. , Vietnamese, Singaporean and South African legislation. The [Humres.Race] field can contain one of the following values:

Legislation	Value	Description
SG	A	Chinese
SG	B	Indian
SG	C	Malay
SG	D	Eurasian
SG	E	Others
US	A	Asian
US	AI	American Indian
US	AN	Alaskan Native
US	B	Black
US	H	Hispanic
US	O	Others
US	PI	Pacific Islander
US	W	White
VN	A	Kinh
VN	B	Thai
VN	C	Kho'me
VN	D	Muong
VN	E	H'Mong
VN	F	Tay
VN	G	Van Kieu
VN	H	Cham
VN	I	Hoa
VN	J	Dao
VN	K	Bana
VN	L	E'de
VN	M	Others
ZA	A	Black
ZA	B	White
ZA	C	Colored
ZA	D	Indian
ZA	F	Others

Rating - Rating

The [Humres.Rating] field stores the current performance rating of a resource. The value in this field can be "A", "B", "C", "D" or "E".

Reason_Resign - Reason end of employment

The [Humres.Reason_Resign] field stores the reason of the end of the employment of the resource. This field can only be filled if the [Humres.Ldatuitdienst] field is filled.

Representative - Representative

The [Humres.Representative] field indicates if the resource has been assigned the predefined representative role. The value "1" indicates the resource has the representative role. The value "0" indicates the resource does not have the representative role.

Repto_ID - Manager

The [Humres.Repto_ID] field stores the ID of the manager of the resource. The [Humres.Repto_ID] field refers to the [Humres.Res_ID] field.

Res_ID - Resource ID

The [Humres.Res_ID] field stores the main identifying code for the resource. The [Humres.Res_ID] field is the reference field for almost all tables that need a reference to the [Humres] table. The user can fill this field manually.

Note! For some tables (like the [Orkrg] table), the reference to the [Humres] table is the [Humres.Usr_ID] field.

RMALimit - RMA limit

The [Humres.RMALimit] field stores the limit up to which the resource can approve Return to Merchant Authorization (RMA) orders.

SalesLimit - Sales order limit

The [Humres.Sales_Limit] field stores the limit up to which the resource can approve sales orders or service orders.

Scale - Job level

The [Humres.Scale] field stores the job level of the resource. The value that can be selected depends on the job title of the resource (the [Humres.Job_Title] field) and has to lie between the minimum ([Hrjbtl.Scalemin]) and maximum ([Hrjbtl.Scalemax]) job level of the job title ([Hrjbtl.Job_Title]).

Signature - Signature

The [Humres.Signature] field stores the binary format of the signature linked to the resource. The signature can be used for printing electronic in mailing, checks, reminders, letters, etc.

SignatureFile - Signature file name

The [Humres.SignatureFile] field stores the name of file that is linked to the resource as signature [Humres.Signature]. In Exact Globe, the full path of the file name is stored in this field.

SkypeID - Skype ID

The [Humres.SkypeID] field stores the Skype ID of the resource.

Note! The [Humres.SkypeID] field is only used in e-Synergy.

Slip_Tekst - Payroll slip text

The [Humres.Slip_Tekst] field is not used.

Socsec_nr - Social security number

The [Humres.Socsec_nr] field stores the social security number of the resource. In the Netherlands, a validation is used to verify the number. A value with X's is considered to be valid.

StateCode - State code

The [Humres.StateCode] field stores the code of the state of the personal address of the resource. The [Humres.StateCode] field refers to the [AddressStates.StateCode] field (where the [Humres.LandISO] field is equal to the [AddressStates.CountryCode] field).

Sur_Name - Surname

The [Humres.Sur_Name] field stores the surname of the resource.

SynchronizeExchange - Synchronize MS Exchange calendar

The [Humres.SynchronizeExchange] field indicates if the MS Exchange calendar of the resource should be synchronized with the workflow of the resource. The value "1" indicates that the MS Exchange calendar should be synchronized. The value "0" indicates that the MS Exchange calendar should not be synchronized. When the MS Exchange calendar is synchronized, the system will periodically compare the MS Exchange calendar of the resource with the workflow and create "Appointment" requests for items marked as "Busy" in the MS Exchange calendar (if not already created).

Note! The [Humres.SynchronizeExchange] field is only used in e-Synergy.

Syscreated - Created date and time

The [Humres.Syscreated] field stores the date and time that the resource has been created.

Syscreator - Creator

The [Humres.Syscreator] field stores the resource who created the resource data. The [Humres.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [Humres.SysGuid] field stores a unique identifier and is used for technical reasons only. It has no functional meaning. The system populates this field for all resources.

Sysmodified - Modified date and time

The [Humres.Sysmodified] field stores the date and time that the resource data was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [Humres.Sysmodifier] field stores the resource who last modified the resource data. Initially, this field contains the creator as is stored in the [Humres.Syscreator] field. The [Humres.Sysmodifier] field refers to the [Humres.Res_ID] field.

Task - Focus

The [Humres.Task] field stores the focus of the resource.

Telnr_prv - Private telephone number

The [Humres.Telnr_prv] field stores the private telephone number of the resource.

Telnr_prv2 - Private mobile telephone number

The [Humres.Telnr_prv2] field stores the private mobile telephone number of the resource.

Telnr_Werk - Office telephone number

The [Humres.Telnr_Werk] field stores the office telephone number of the resource.

Telnr_Werk2 - Office mobile telephone number

The [Humres.Telnr_Werk2] field stores the office mobile telephone number of the resource.

Timestamp - Timestamp

The [Humres.Timestamp] field is a technical field, which the SQL server triggers. The timestamp sorts the resources in created or changed order. The system assigns a new timestamp for each new record and updates the timestamp of the changed records. The system uses the timestamp for replication.

TimeZone - Time zone

The [Humres.TimeZone] field stores the time zone of the resource. The [Humres.TimeZone] field refers to the [TimeZones.ID] field.

Note! The [Humres.TimeZone] field is only used in e-Synergy.

Toestel - Telephone extention

The [Humres.Toestel] field stores the extention of the office telephone number of the resource.

Uitk_Code - Social benefit authority

The [Humres.Uitk_Code] field is not used.

UserGroup - User group

The [Humres.UserGroup] field is not used.

Usr_ID - User ID

The [Humres.Usr_ID] field stores the second identifying code for the resource. The [Humres.Usr_ID] field is used to determine whether a user has access to Exact Globe / e-Synergy. The system will compare the user's web login name with the value in the [Humres.Usr_ID] field; the [Humres.Usr_ID] field must contain a valid MS Windows user name for the corresponding domain.

Usr_ID2 - Secure user ID

The [Humres.Usr_ID2] field stores the secure user ID of the resource. This field is used to meet the regulations of the Food and Drug Administration (FDA) for securing approval of documents. For the FDA it is not allowed that the [Humres.Usr_ID] field is used for this purpose. The secure user ID must be a valid MS Windows user name for the corresponding domain. The [Humres.Usr_ID2] field cannot be populated with the same value as the [Humres.Usr_ID] field. If the document type is defined to use a secure approval (the [BacoDiscussionsFixedTypes.Sec_ap_Use] field has the value "1"), the [Humres.Usr_ID2] field will be used to check if the user has rights to approve the document.

Note! The [Humres.Usr_ID2] field is only used in e-Synergy.

VacancyStartDate - Vacancy Start Date

The [Humres.VacancyStartDate] field stores the starting date of vacancy.

VacancyType - Vacancy Type

The [Humres.VacancyType] field stores the vacancy type created. The [Humres.VacancyType] field can have one of the following values:

Value	Description
I	Internal (Default)
E	External
B	Both

ValCode - Currency code

The [Humres.ValCode] field is not used.

Woonpl - City

The [Humres.Woonpl] field stores the city of the private address of the resource.

Workstat - Workstation

The [Humres.Workstat] field is not used.

Workstat_addr - Workstation IP address

The [Humres.Workstat_addr] field stores the IP address of the workstation of the resource.



Chapter 3 | HrFree - HRM free table

3. HrFree - HRM free table

3.1 Introduction

The [HrFree] table is used for HRM related entities. Those entities are distinguished by the [HrFree.FileType] field:

Value	Description
CG	Component group
JG	Job group
VG	Job activities
SC	Scales

Job group: A job group is linked to job titles. It is used to group different job titles together, to make a horizontal grouping in the jobtitles.

Job activity: A job activity is linked to job titles. It is used to show the main activity of the job, to make a vertical grouping in the jobtitles.

Component group: A component group is used to group a group of payroll components so they can be linked in one go to a resource.

Scales: Scales can be used to divide the payroll resources into different salary scales.

Since all these functionalities use the [HrFree] fields differently, this table will be described per functionality. If a field is not used by a specific functionality, it will not be mentioned in that functionality's section.

3.2 HrFree: Component group

3.2.1 General description

One of the functions of the [HrFree] table is to store the payroll component groups.

Component groups are used to group different payroll components so they can be linked to a resource in 1 action.

3.2.2 HrFree: Component group field details

Descr60 - Description

The [HrFree.Descr60] field stores the description of the component group.

Division - Division

The [HrFree.Division] field stores the division code. The [HrFree.Division] field stores the numeric value of the [Bedryf.Bednr] field. The [HrFree.Division] field is added for future functionality.

DocID - Document ID

The [HrFree.DocID] field stores the component group's Attachment. The [HrFree.DocID] field refers to the [BacoDiscussions.ID] field.

FileType - Type

The [HrFree.FileType] field stores the code for the sort of data that is stored in the [HrFree] table. The code for component group is "CG". The [HrFree.FileType] field can have one of the following values:

Value	Description
CG	Component group
JG	Job group
VG	Job activities
SC	Scales

ID - ID

The [HrFree.ID] field stores the system generated database record identification number. This is the field that is used to refer from other tables to the [HrFree] table.

Notes - Notes

The [HrFree.Notes] field stores the ID of the record in the [Notes] table where the component group's note is stored. The [HrFree.Notes] field refers to the [Notes.ID] field.

RecKey - Code

The [HrFree.RecKey] field stores the identification code of the component group. The [HrFree.RecKey] field in combination with the [HrFree.FileType] needs to be unique.

Syscreated - Created date and time

The [HrFree.Syscreated] field stores the date and time that the component group has been created.

Syscreator - Creator

The [HrFree.Syscreator] field stores the resource who created the component group. The [HrFree.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [HrFree.SysGuid] field stores the Guid field generated by the system upon creation of the component group.

Sysmodified - Modified date and time

The [HrFree.Sysmodified] field stores the date and time that the component group was last modified.

Sysmodifier - Modifier

The [HrFree.Sysmodifier] field stores the resource who last modified the component group. Initially, this field contains the creator as is stored in the [HrFree.Sysmodifier.Syscreator] field. The [HrFree.Sysmodifier.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrFree.Timestamp] field stores a system generated timestamp. The timestamp field is regenerated upon every change in the component group. This field is mainly used for replication purposes.

3.3 HrFree: Job group

3.3.1 General description

One of the functions of the [HrFree] table is to store the job groups. Job groups are used to group job activities and job titles that are closely related.

3.3.2 HrFree: Job group field details

Descr60 - Description

The [HrFree.Descr60] field stores the description of the job group.

Division - Division

The [HrFree.Division] field stores the division code. The [HrFree.Division] field stores the numeric value of the [Bedryf.Bednr] field. The [HrFree.Division] field is added for future functionality.

DocID - Document ID

The [HrFree.DocID] field stores the ID of the document that is linked to the job group.
The [HrFree.DocID] field refers to the [BacoDiscussions.ID] field.

FileType - Type

The [HrFree.FileType] field stores the code for the sort of data that is stored in the [HrFree] table. The code for job group is "JG". The [HrFree.FileType] field can contain one of the following values:

Value	Description
CG	Component group
JG	Job group
VG	Job activities
SC	Scales

HrGroup - Level 2

The [HrFree.HrGroup] field stores the ID of the secondary job group, the secondary job group is used to link 2 job groups together that have common attributes. The [HrFree.HrGroup] field refers to the [HrFree.RecKey] field where the [HrFree.FileType] = "JG".

ID - ID

The [HrFree.ID] field stores the system generated database record identification number. This is the field that is used to refer from other tables to the [HrFree] table.

Notes - Notes

The [HrFree.Notes] field stores the ID of the record in the [Notes] table where the component group's note is stored. The [HrFree.Notes] field refers to the [Notes.ID] field.

RecKey - Code

The [HrFree.RecKey] field stores the stores the identification code of the component group. The [HrFree.RecKey] field in combination with the [HrFree.FileType] needs to be unique.

Syscreated - Created date and time

The [HrFree.Syscreated] field stores the date and time that the job group has been created.

Syscreator - Creator

The [HrFree.Syscreator] field stores the resource who created the job group. The [HrFree.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [HrFree.SysGuid] field stores the Guid field generated by the system upon creation of the job group.

Sysmodified - Modified date and time

The [HrFree.Sysmodified] field stores the date and time that the job group was last modified. Initially, this field contains the creation date.

Sysmodifier - Sysmodifier

The [HrFree.Sysmodifier] field stores the resource who last modified the job group. Initially, this field contains the creator as is stored in the [HrFree.Syscreator] field. The [HrFree.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrFree.Timestamp] field stores a system generated timestamp. The timestamp field is regenerated upon every change in the job group. This field is mainly used for replication purposes.

3.4 *HrFree: Job activities*

3.4.1 General description

One of the functions of the [HrFree] table is to store the job activities. The job activities are all the activities that are performed by resources within the company.

For each job activity a selection of the most suitable competencies can be selected out of a set of 13.

3.4.2 HrFree: Job activities field details

Competency1 - Competency 1

The [HrFree.Competency1] field stores the first of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency2 - Competency 2

The [HrFree.Competency2] field stores the second of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency3 - Competency 3

The [HrFree.Competency3] field stores the third of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency4 - Competency 4

The [HrFree.Competency4] field stores the fourth of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency5 - Competency 5

The [HrFree.Competency5] field stores the fifth of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency6 - Competency 6

The [HrFree.Competency6] field stores the sixth of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency7 - Competency 7

The [HrFree.Competency7] field stores the seventh of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency8 - Competency 8

The [HrFree.Competency8] field stores the eighth of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency9 - Competency 9

The [HrFree.Competency9] field stores the ninth of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency10 - Competency 10

The [HrFree.Competency10] field stores the tenth of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency11 - Competency 11

The [HrFree.Competency11] field stores the eleventh of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency12 - Competency 12

The [HrFree.Competency12] field stores the twelfth of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Competency13 - Competency 13

The [HrFree.Competency13] field stores the thirteenth of 13 indicators that can be selected, and that indicate if for the job activity the competence is relevant. The value "1" indicates the competence is relevant. The value "0" indicates the competence is not relevant.

Descr60 - Description

The [HrFree.Descr60] field stores the description of the job activity.

Division - Division

The [HrFree.Division] field stores the division code. The [HrFree.Division] field stores the numeric value of the [Bedryf.Bednr] field. The [HrFree.Division] field is added for future functionality.

DocID - Document ID

The [HrFree.DocID] field stores the ID of the document that is linked to the job activity.

The [HrFree.DocID] field refers to the [BacoDiscussions.ID] field.

FileType - Type

The [HrFree.FileType] field stores the code for the sort of data that is stored in the [HrFree] table. The code for job activities is "VG".

The [HrFree.FileType] field can contain one of the following values:

Value	Description
CG	Component group
JG	Job group
VG	Job activities
SC	Scales

ID - ID

The [HrFree.ID] field stores the system generated database record identification number. This is the field that is used to refer from other tables to the [HrFree] table.

JobGroup - Job group

The [HrFree.JobGroup] field stores the code of the job group the job activity belongs to. The [HrFree.JobGroup] field refers to the [HrFree.RecKey] field where the [HrFree.filetype] = "JG".

Notes - Notes

The [HrFree.Notes] field stores the ID of the record in the [Notes] table where the job activity's note is stored. The [HrFree.Notes] field refers to the [Notes.ID] field.

RecKey - Code

The [HrFree.RecKey] field stores the identification code of the job activity. The [HrFree.RecKey] field in combination with the [HrFree.filetype] needs to be unique.

Syscreated - Created date and time

The [HrFree.Syscreated] field stores the date and time that the job activities has been created.

Syscreator - Creator

The [HrFree.Syscreator] field stores the ID of the resource that created the job activities. The [HrFree.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [HrFree.SysGuid] field stores the Guid field generated by the system upon creation of the job activities.

Sysmodified - Modified date and time

The [HrFree.Sysmodified] field stores the date and time that the job activities was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HrFree.Sysmodifier] field stores the resource who last modified the job activities. Initially, this field contains the creator as is stored in the [HrFree.Syscreator] field. The [HrFree.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrFree.Timestamp] field stores a system generated timestamp. The timestamp field is regenerated upon every change in the job activities. This field is mainly used for replication purposes.

3.5 HrFree: Scales

3.5.1 General description

One of the functions of the [HrFree] table is to store the payroll component scales. The scales can be used to divide the payroll resources into different salary scales.

3.5.2 HrFree: Scales field details

Descr60 - Description

The [HrFree.Descr60] field stores the description of the salary scale.

Division - Division

The [HrFree.Division] field stores the division code. The [HrFree.Division] field stores the numeric value of the [Bedryf.Bedmr] field. The [HrFree.Division] field is added for future functionality.

DocID - Document ID

The [HrFree.DocID] field stores the ID of the document that is linked to the salary scale. The [HrFree.DocID] field refers to the [BacoDiscussions.ID] field.

FileType - Type

The [HrFree.filetype] field stores the code for the sort of data that is stored in the [HrFree] table. The code for component scales is "SC". The [HrFree.FileType] field can contain one of the following values:

Value	Description
CG	Component group
JG	Job group
VG	Job activities
SC	Scales

ID - ID

The [HrFree.ID] field stores the system generated database record identification number. This is the field that is used to refer from other tables to the [HrFree] table.

Notes - Notes

The [HrFree.Notes] field stores the ID of the record in the [Notes] table where the job activity's note is stored. The [HrFree.Notes] field refers to the [Notes.ID] field.

RecKey - Code

The [HrFree.RecKey] field stores the identification code of the scale. The [HrFree.RecKey] field in combination with the [HrFree.filetype] needs to be unique.

Syscreated - Created date and time

The [HrFree.Syscreated] field stores the date and time that the scales has been created.

Syscreator - Creator

The [HrFree.Syscreator] field stores the ID of the resource that created the scales. The [HrFree.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [HrFree.SysGuid] field stores the Guid field generated by the system upon creation of the scales.

Sysmodified - Modified date and time

The [HrFree.Sysmodified] field stores the date and time that the scales was last modified. Initially, this field contains the creation date.

Sysmodifier - Sysmodifier

The [HrFree.Sysmodifier] field stores the resource who last modified the scales. Initially, this field contains the creator as is stored in the [HrFree.Syscreator] field. The [HrFree.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrFree.Timestamp] field stores a system generated timestamp. The timestamp field is regenerated upon every change in the scales. This field is mainly used for replication purposes.



Chapter 4 | HRCompanyPeriods - Period closing

4. HRCompanyPeriods - Period closing

4.1 General description

The [HRCompanyPeriods] table stores the closed periods for a division(not the closed period of a financial year) in e-Synergy. Users are able to close periods manually if the 'Calculation - Entitlements: Automatically' setting is not set to 'Division: All'. The period closing process is irreversible.

Note! Closing a period for a division will cause the following functions to be performed:

1. Monthly vacation entitlements for the selected period will be calculated for all resources in the selected division.
2. Full time equivalents (FTEs) for each cost center in the selected division will be calculated and updated into the e-Synergy Financials budget scenarios as actual amount.

4.2 HRCompanyPeriods field details

CompanyCode - Division

The [HRCompanyPeriods.CompanyCode] field stores the company code of the company for which the closed period is valid.The [HRCompanyPeriods.CompanyCode] field refers to the [Bedryf.Bednr] field.

Division - Division

The [HRCompanyPeriods.Division] field stores the division code of the division for which the closed period is valid. The [HRCompanyPeriods.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used yet. It is added for future functionality.

FinPeriod - Period

The [HRCompanyPeriods.FinPeriod] field stores the closed period.

FinYear - Year

The [HRCompanyPeriods.FinYear] field stores the financial year of the closed period.

ID - ID

The [HRCompanyPeriods.ID] field stores the system generated database record identification number. This field is not functionally used.

Status - Status

The [HRCompanyPeriods.Status] field stores the status of the period. The value '1' indicates that the period has been closed for period closing page.

Syscreated - Created date and time

The [HRCompanyPeriods.Syscreated] field stores the date and time that the closed period has been created.

Syscreator - Creator

The [HRCompanyPeriods.Syscreator] field stores the ID of the resource who created the closed period. The [HRCompanyPeriods.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [HRCompanyPeriods.Sysmodified] field stores the date and time that the closed period was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HRCompanyPeriods.Sysmodifier] field stores the ID of the resource who last modified the closed period. Initially, this field contains the creator as is stored in the [HRCompanyPeriods.Syscreator] field. The [HRCompanyPeriods.Sysmodifier] field refers to the [Humres.Res_ID] field.



Chapter 5 | HrbtI - Job titles

5. Hrbt - Job titles

5.1 General description

The [Hrbt] table stores the job titles. With each job title, also job title related defaults and restriction values are stored.

5.2 Hrbt field details

Beroep_cd - Profession codes

The [Hrbt.Beroep_cd] field is not used.

Code_fnc - Position code

The [Hrbt.Code_fnc] field stores the payroll function code. This function code can be used within payroll to distinguish groups of resources.

Del_doc_Name - Document

The [Hrbt.Del_doc_Name] field is not used.

Del_doc_Path - Document path

The [Hrbt.Del_doc_Path] field is not used.

Descr50 - Description

The [Hrbt.Descr50] field stores the description of the job title.

Division - Division

The [Hrbt.Division] field stores the division code. The [Hrbt.Division] field stores the numeric value of the [Bedryf.Bedmr] field. The [Hrbt.Division] field is added for future functionality.

DocID - Document ID

The [Hrbt.DocID] field stores the ID of the document that is linked to the job title.

The [Hrbt.DocID] field refers to the [BacoDiscussions.ID] field.

Exttar - External rate

The [Hrbt.Exttar] field stores the external rate used for job costing purposes within the E- Job Costing package.

ID - ID

The [Hrbt.ID] field stores the system generated database record identification number. This field is not functionally used.

Inttar - Internal rate

The [Hrbt.Inttar] field stores the internal rate used for job costing purposes within the E- Job Costing package.

Job_grp - Job group

The [Hrjbtl.Job_grp] field stores the code of the job group to which the job title belongs. The [Hrjbtl.Job_grp] field refers to the [HrFree.RecKey] field where the [HrFree.filetype] field='JG'.

Job_Level - Job level

The [Hrjbtl.Job_Level] field stores the default job level for a resource with this job title.

Job_Title - Job title

The [Hrjbtl.Job_Title] field stores the identifying code of the job title. This is the field that is used to refer from other tables to the [Hrjbtl] table.

Kmrateint - Internal travel rate

The [Hrjbtl.Kmrateint] field is not used.

Notes - Notes

The [Hrjbtl.Notes] field stores the ID of the record in the [Notes] table where the job title's note is stored. The [Hrjbtl.Notes] field refers to the [Notes.ID] field.

Prodpct - Productive percentage

The [Hrjbtl.Prodpct] field is not used.

Productiv - Productive

The [Hrjbtl.Productiv] field indicates for which type of person the job title is created.

This could be for an HRM resource or for a CRM contact person. The value "1" indicates that the job title is used in CRM. The value "0" indicates it is used in HRM.

RoleID - RoleID

The [Hrjbtl.RoleID] field is not used.

RoleLevel - RoleLevel

The [Hrjbtl.RoleLevel] field is not used.

ScaleMax - Maximum scale

The [Hrjbtl.ScaleMax] field stores the maximum job level for a resource with this job title.

ScaleMin - Minimum scale

The [Hrjbtl.ScaleMin] field stores the minimal job level for a resource with this job title.

SchaalCode - Scale codes

The [Hrjbtl.SchaalCode] field is not used.

Schaalsrt - Scale types

The [Hrjbtl.Schaalsrt] field is not used.

Syscreated - Created date and time

The [Hrjbtl.Syscreated] field stores the date and time that the job titles has been created.

Syscreator - Creator

The [Hrjbtl.Syscreator] field stores the ID of the resource that created the job titles. The [Hrjbtl.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [Hrjbtl.SysGuid] field stores the Guid field generated by the system upon creation of the job titles.

Sysmodified - Modified date and time

The [Hrjbtl.Sysmodified] field stores the date and time that the job titles was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [Hrjbtl.Sysmodifier] field stores the resource who last modified the job titles Initially, this field contains the creator as is stored in the [Hrjbtl.Syscreator] field. The [Hrjbtl.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [Hrjbtl.Timestamp] field stores a system generated timestamp. The timestamp field is regenerated upon every change in the job titles. This field is mainly used for replication purposes.

Vert_grp - Vertical group

The [Hrjbtl.Vert_grp] field stores the code of the job activity to which the job title belongs. The [Hrjbtl.Vert_grp] field refers to the [HrFree.RecKey] field where thee [HrFree.filetype] field='VG'.

Wkcp_Risk - Workers' compensation risk code

The [Hrjbtl.Wkcp_Risk] field is not used.

Xdefratelv - Rate level

The [Hrjbtl.Xdefratelv] field is not used.



Chapter 6 | HRMainFint - Main Financial Components Types

6. HRMainFint - Main Financial Components Types

6.1 *General Description*

The [HRMainFint] table stores the main financial component types of the financial components stored in the [Hrfint] table.

6.2 *HRMainFint Field Details*

Description - Component type

The [HRMainFint.Description] field stores the user defined description of the main financial component type.

Division - Division

The [HRMainFint.Division] field stores the division code. This field is not used yet. It is added for future functionality.

GraphColor - Color

The [HRMainFint.GraphColor] field stores the color code of the main financial component type.

ID - Code

The [HRMainFint.ID] field stores the user defined main financial component code.

ViewOrder - Order

The [HRMainFint.ViewOrder] field stores the order sequence number of the main financial component type.



Chapter 7 | Hrfin - Financial data

7. Hrfin - Financial data

7.1 General descriptions

The [Hrfin] table stores employees' current financial components. Each financial component attached to the employee will be stored as a separate record.

The [Hrfin] table is linked to [Humres] table via the human resource ID field, [Humres.Res_ID].

7.2 Hrfin field details

Comp_type - Component type

The [Hrfin.Comp_type] field stores the financial component code that makes up the employee's financial data. Only an existing financial component code that exists in the financial component table, [Hrfint] can be used. The [Hrfin.Comp_type] field refers to the [Hrfint.Comp_type].

Division - Division

The [Hrfin.Division] field stores the division code. The [Hrfin.Division] field refers to the [Bedryf.Division] field. This field is not functionally used at this moment.

Employee_amt - Employee amount

The [Hrfin.Employee_amt] field stores the amount that the employee is contributing for the financial component. This field is only available if the financial component type has been defined as a 'Deduction' in maintain financial component task (where [Hrfint.Fingroup] has the value 'D').

Employer_amt - Employer amount

The [Hrfin.Employer_amt] field stores the amount that the employer pays or contributes towards the employee for the allowance or deduction specified. This amount is used for reporting purposes in the Quick inquiry financial overview and the Graphical display of financial components after it has been converted to a monthly figure.

Note! Refer to [Hrfin.Pay_period] field for details on how the amount is converted to a monthly figure.

End_date - End date

The [Hrfin.End_date] field stores the end date that all the employee's financial components are valid.

Note! A default of the employee's end date (termination date) as entered in Maintain employee, General tab will be displayed. This date cannot be greater than the end date in Maintain employees, General tab.

Gn - Gross/Net

The [Hrfin.Gn] field stores a value that indicates how the financial component is entered, whether it is gross or net and whether it is a fixed or variable amount. When a new financial component is added for the employee, the default displayed for this field is taken from the financial component gross/net field ([Hrfint.Gn]) defined in the maintain financial component task. Only valid values are displayed in the browser provided.

Hours - Hours

The [Hrfin.Hours] field is not functionally used.

ID - ID

The [Hrfin.ID] field stores the system generated database record identification number. This field is not functionally used.

Line - Line number

The [Hrfin.Line] field stores the sequence number of this record. This field together with the [Hrfin.Res_id] field makes up the compound key of this entity.

Notes - Notes

The [Hrfin.Notes] field stores the comments on the individual financial components in e-Synergy. It is not used in Exact Globe 2000.

Pay_period - Payment period

The [Hrfin.Pay_period] field stores the payment frequency of the employee's financial component. It indicates how often the component is paid/deducted to/from the employee. When a new financial component is added for the employee, the default displayed for this field is taken from the financial component payment period, [Hrfin.pay_period] field defined in the Maintain financial component task. Valid values can be found in the browser provided for this field in the Financial tab of the Maintain employees task.

Note! The [Hrfin.Pay_period] field is used in the Quick inquiry financial overview and the Graphical display of financial components to convert the amount to a monthly figure by using one of the formulas outlined below:

- Weekly = amount x 52/12
- Quarterly = amount / 3
- Half-yearly = amount / 6
- Yearly = amount / 12
- Bi-weekly = amount x 52/2/12
- 4-weekly = amount x 52/4/12
- Daily, Hourly and Monthly amounts will be added to the figure as is.

Pay_type - Payment type

The [Hrfin.Pay_type] field stores a value that indicates whether the payment of the financial component is a positive or negative figure. This field is not used in Exact Globe 2000.

Res_id - Resource ID

The [Hrfin.Res_id] field stores the employee number (also known as the human resource ID) that the employee's financial component relates to. This field is automatically updated when a financial component is added to the employee. The [Hrfin.Res_id] field refers to the [Humres.Res_Id] field.

Start_date - Start date

The [Hrfin.Start_date] field stores the date that the employee's financial components are valid from. The employee's start date (as entered in the General tab in Maintain employees) is used as the default when a new employee is created. Every time the employment start date is changed, this date will be changed as well. This start date applies to all the financial components that are attached to the employee.

Syscreated - Created date and time

The [Hrfin.Syscreated] field stores the date and time the employee's financial component was created.

Syscreator - Creator

The [Hrfin.Syscreator] field stores the creator ID of the employee's financial component. The [Hrfin.Syscreator] field refers to the [Humres.Res_ID] field.

Sysguid - Sysguid

The [Hrfin.Sysguid] field stores the Guid generated by the system upon creation of the employee's financial component. It has no functional meaning.

Sysmodified - Modified date and time

The [Hrfin.Sysmodified] field stores the date and time the employee's financial component were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [Hrfin.Sysmodifier] field stores the resource that last modified the employee's financial component. Initially, this field contains the creator as is stored in the [Hrfin.Syscreator] field. The [Hrfin.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [Hrfin.Timestamp] field stores the date and time the employee's financial component was created.

Valcode - Currency code

The [Hrfin.Valcode] field stores the currency code used for the employee's financial component. The [Hrfin.Valcode] field refers to the [Valuta.Valcode] field.



Chapter 8 | Hrfint - Financial component

8. Hrfint - Financial component

8.1 General descriptions

The [Hrfint] table stores all the financial component types, which together build up the complete salary structure of an employee.

The financial component created must either be an allowance or a deduction. If it is a deduction, the party that is going to pay for this component must be indicated (it could be that both the employer and employee are contributing for the deduction). Allowances are always paid by the employer.

8.2 Hrfint field details

Comp_type - Component type

The [Hrfint.Comp_type] field stores unique financial component code that is used to identify the component. Maximum length of the code is 4 characters. This code is used to select valid financial components in the task Maintain employees, financial tab.

Country - Country

The [Hrfint.Country] field stores the country code of the financial component type. The [Hrfint.Country] fields refer to the [Land.Landcode] field.

Currency - Currency

The [Hrfint.Currency] field stores the currency code of the financial component type.

Def_amt - Default amount

The [Hrfint.Def_amt] field stores the amount of the financial component type.

DefAmtEditable - Default amount editable

The [Hrfint.DefAmtEditable] field stores a value that indicates whether the amount of the financial component type, [Hrfint.Def_amt] is editable. The [Hrfint.DefAmtEditable] field can store one of the following values:

Value	Description
1	Editable
0	Not editable

Descr50_0 - Description

The [Hrfint.Descr50-0] field stores the default language textual description of the financial component type.

Descr50_1 - Description

The [Hrfint.Descr50_1] field stores the 1st alternative language textual description of the financial component type.

Note! This field is only visible when the user setting which can be filled in the 'Language 2' field in the general settings is enabled.

Descr50_2 - Description

The [Hrfint.Descr50_2] field stores the 2nd alternative language textual description of the financial component type.

Note! This field is only visible when the user setting which can be filled in the 'Language 3' field in the general settings is enabled.

Descr50_3 - Description

The [Hrfint.Descr50_3] field stores the 3rd alternative language textual description of the financial component type.

Note! This field is only visible when the user setting, which can be filled in the 'Language 4' field in the general settings is enabled.

Descr50_4 - Description

The [Hrfint.Descr50_4] field stores the 4th alternative language textual description of the financial component type.

Note! This field is only visible when the user setting which can be filled in the 'Language 5' field in the general settings is enabled.

Division - Division

The [Hrfint.Division] field stores the division code. The [Hrfint.Division] field refers to the [Bedryf.Division] field.

DocID - Document ID

The [Hrfint.DocID] field stores the system generated ID of the document that is attached to the financial component type.

Employee_ny - Employee

The [Hrfint.Employee_ny] field stores a value that indicates whether the employee is liable for the amount entered for the financial component type. This field is only applicable if the group is a deduction (where the [Hrfint.Fingroup] field has the value "E").

Note! The employee amount can only be entered in the financial tab of maintain employees if this field is set to Yes.

Employer_ny - Employer

The [Hrfint.Employer_ny] field stores a value that indicates whether the employer is liable for amounts entered for the financial component type. If the group is specified as an allowance (where the [Hrfint.Fingroup] field has the value "A"), the employer will always be liable for the amount entered for the financial component.

Enddate - End date

The [Hrfint.Enddate] field stores the end date that the financial component type is valid.

Fingroup - Type

The [Hrfint.Fingroup] field stores a value that indicates whether this financial component is an allowance or a deduction. If it is a deduction, the payer must be indicated, which can be either the employee or employer, or both. The [Hrfint.Fingroup] field can store one of the following values:

Value	Description
A	Earnings
D	Deduction

Fixed - Fixed/Variable

The [Hrfint.Fixed] field stores a value that indicates whether the amount is a fixed amount or a variable amount for the financial component type. The [Hrfint.Fixed] field can store one of the following values:

Value	Description
F	Fixed
V	Variable

Gbknr2 - Gbknr2

The [Hrfint.Gbknr2] field is not functionally used.

Glac - General ledger account

The [Hrfint.Glac] field stores the general ledger account that is defined for the financial component type. The [Hrfint.Glac] field refers to the [Grtbk.reknr] field.

Gn - Gross/Net

The [Hrfint.Gn] field stores a value that indicates how the financial component type is entered, whether it is gross or net and whether it is a fixed or variable amount. The value entered here will be displayed as the default when this financial component type is chosen to be attached to the employee.

ID - ID

The [Hrfint.ID] field stores the unique ID of the financial component type.

JobActivity - Job activity

The [Hrfint.JobActivity] field stores the type of job activity code that uses the financial component type.

MainType - Main type

The [Hrfint.MainType] field stores the main component code where the similar financial component type is grouped in the same main group.

Notes - Notes

The [Hrfint.Notes] field stores an incremental number assigned to the financial component type as it is created.

Pay_period - Payment period

The [Hrfint.Pay_period] field stores a value that indicates how frequently the financial component is paid to the employee. The value entered here will be used as the default value displayed in the financial tab of maintain employee when this financial component is attached to the employee. The [Hrfint.Pay_period] field can store one of the following values:

Value	Description
Y	Yearly
A	Half-yearly
Q	Quarterly
M	Monthly
S	Semi-monthly
W	Weekly
T	Bi-Weekly
V	4-Weekly
D	Daily
H	Hourly
O	Once-Only

Payroll - Payroll

The [Hrfint.Payroll] field is not functionally used.

Scale - Scale

The [Hrfint.Scale] field is not functionally used.

Startdate - Start date

The [Hrfint.Startdate] field stores the date that the financial component type is valid from.

Syscreated - Created date and time

The [Hrfint.Syscreated] field stores the date and time the financial component type was created.

Syscreator - Creator

The [Hrfint.Syscreator] field stores the creator ID of the financial component type. The [Hrfin.Syscreator] field refers to the [Humres.Res_ID] field.

Sysguid - Sysguid

The [Hrfint.Sysguid] field stores the Guid generated by the system upon creation of the financial component type. It has no functional meaning.

Sysmodified - Modified date and time

The [Hrfint.Sysmodified] field stores the date and time the financial component type were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [Hrfint.Sysmodifier] field stores the resource that last modified the financial component type. Initially, this field contains the creator as is stored in the [Hrfint.Syscreator] field. The [Hrfint.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [Hrfint.Timestamp] field stores the date and time the financial component type was created.

Toe_srt - Toe_srt

The [Hrfint.Toe_srt] field is not functionally used.

Unit - Unit

The [Hrfint.Unit] field stores a value that indicates the unit measurement of the total specified in the default column of the financial component type. The [Hrfint.Unit] field can store one of the following values:

Value	Description
A	Amount
P	Percentage



Chapter 9 | AbsenceEntitlements - Absence Entitlements

9. AbsenceEntitlements - Absence Entitlements

9.1 General description

The [AbsenceEntitlements] table stores absence entitlements. The entitlement is a combination of a request type with a number of days or hours. The entitlement can either apply to all resources within a division, or can be resource-specific, meaning that it deviates from the division entitlement.

9.2 AbsenceEntitlements fields details

AbsenceType - Request type

The [AbsenceEntitlements.AbsenceType] field stores the request type that is the basis for the calculation of the absence entitlement. The [AbsenceEntitlements.AbsenceType] field refers to the [AbsenceTypes.ID] field.

CompanyCode - Division

The [AbsenceEntitlements.CompanyCode] field stores the division code in case of division entitlement only. In case of resource-specific entitlements, the [AbsenceEntitlements.CompanyCode] is not filled. The [AbsenceEntitlements.CompanyCode] field refers to the [Bedryf.Bednr] field.

Note! In Exact Globe and an integrated scenario the [AbsenceEntitlements.CompanyCode] field is always filled.

Days - Number of day

The [AbsenceEntitlements.Days] field stores the number of days of an entitlement, if this is defined in days. An absence entitlement can also be stored in hours. In that case the [AbsenceEntitlements.Hours] field is used and the [AbsenceEntitlements.Days] field is not filled.

Division - Division

The [AbsenceEntitlements.Division] field stores the division code. The [AbsenceEntitlements.Division] field stores the numeric value of the [Bedryf.Bednr] field. The [AbsenceEntitlements.Division] field is not used yet. It is added for future functionality.

EmpID - Resource

The [AbsenceEntitlements.EmpID] field stores the resource for whom the entitlement applies. In case of division entitlements, the [AbsenceEntitlements.EmpID] field is not filled. The [AbsenceEntitlements.EmpID] field refers to the [Humres.Res_ID] field.

ID - Guid

The [AbsenceEntitlements.ID] field stores the Guid generated by the system upon creation of the absence entitlements.

Hours - Number of hour

The [AbsenceEntitlements.Hours] field stores the number of hours of an entitlement, if this is defined in hours. An absence entitlement can also be stored in days. In that case the [AbsenceEntitlements.Days] field is used and the [AbsenceEntitlements.Hours] field is not filled.

JobGroup - Job group

The [AbsenceEntitlements.JobGroup] field is not used. This will be build in the future.

Scale - Scale

The [AbsenceEntitlements.Scale] field stores the service year or age that is related to the entitlement. This depends on the Entitlements settings in the request type definition: the [AbsenceTypes.Basis] field.

Note! The [AbsenceEntitlements.Scale] field is not filled when the absence entitlement basis is calculated on a fixed basis (defined in the Request type definition).

Syscreated - Created date and time

The [AbsenceEntitlements.Syscreated] field stores the date and time that the absence entitlement has been created.

Syscreator - Creator

The [AbsenceEntitlements.Syscreator] field stores the resource who created the absence entitlement. The [AbsenceEntitlements.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [AbsenceEntitlements.Sysmodified] field stores the date and time that the absence entitlement was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [AbsenceEntitlements.Sysmodifier] field stores the resource who last modified the absence entitlement. Initially, this field contains the creator as is stored in the [AbsenceEntitlements.Syscreator] field. The [AbsenceEntitlements.Sysmodifier] field refers to the [Humres.Res_ID] field.



Chapter 10 | PublicHolidays - Public Holidays

10. PublicHolidays- Public Holidays

10.1 General descriptions

The [PublicHolidays] table stores public holidays for country or division or location. The public holidays can be on three levels:

Country specific: The public holiday is applicable for all resources who work for a division in this country.

Division specific: The public holiday is applicable for all resources in this division.

Location specific: The public holiday is applicable for all resources who have a location as main location. The location specific public holiday is entitled when a public holiday is special for a particular city.

10.2 PublicHolidays fields details

Country - Country

The [PublicHolidays.Country] field stores the country for which the public holiday applies. The [PublicHolidays.Country] field refers to the [Land.LandCode] field. A public holiday can also be division specific or location specific. In case of division specific or location specific public holidays, the [PublicHolidays.Country] field is not filled.

Date - Date

The [PublicHolidays.Division] field stores the dates when the public holidays takes place.

Deduct - Deduct

The [PublicHolidays.Deduct] field is not used.

Description - Description

The [PublicHolidays.Description] field stores the descriptions of the public holidays.

Division - Division

The [PublicHolidays.Division] field stores the division code when a public holiday is division specific. The [PublicHolidays.Division] field refers to the [Bedryf.Bednr] field. In case of country specific or location specific public holidays, the [PublicHolidays.Division] field is not filled.

Note! The [PublicHolidays.Division] field is only used in e-Synergy but not used in Exact Globe (enterprise).

DivisionX - DivisionX

The [PublicHolidays.DivisionX] field is not used yet. It is added for future functionality.

ID - ID

The [PublicHolidays.ID] field stores the ID generated by the system upon creation of the public holiday.

MainLoc - Main location

The [PublicHolidays.MainLoc] field stores the location for which the public holiday applies. The [PublicHolidays.MainLoc] field refers to the [Hrloc.Loc] field. A public holiday can also be country specific or division specific. In case of country specific or division specific public holidays, the [PublicHolidays.MainLoc] field is not filled.

Syscreated - Created date and time

The [PublicHolidays.Syscreated] field stores the date and time that the public holiday has been created.

Syscreator - Creator

The [PublicHolidays.Syscreator] field stores the resource who created the public holiday. The [PublicHolidays.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [PublicHolidays.Sysmodified] field stores the date and time that the public holiday was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [PublicHolidays.Sysmodifier] field stores the resource who last modified the public holiday. Initially, this field contains the creator as stored in the [PublicHolidays.Syscreator] field. The [PublicHolidays.Sysmodifier] field refers to the [Humres.Res_ID] field.



Chapter 11 | WorkSchedules- Work Schedules

11. WorkSchedules- Work Schedules

11.1 General description

The [WorkSchedules] table stores the work schedules which consist of default work schedule, division work schedule and resource-specific work schedule. The division work schedule is use within a division and the resource-specific work schedule is use on a specific resource. Each work schedule in the table represents the work schedule for one period in a day. A period can be either a morning period or an afternoon period. A complete work schedule for a day can have either one or two periods per day, each period may includes a different start time and a different end time.

11.2 WorkSchedules fields details

CompanyCode - Division

The [WorkSchedules.CompanyCode] field stores the division code to which the work schedule is linked. In case of default work schedule and resource-specific work schedule, the [WorkSchedules.CompanyCode] is not filled. The [WorkSchedules.CompanyCode] field refers to the [Bedryf.Bednr] field.

Division - Division

The [WorkSchedules.Division] field stores the division code. The [WorkSchedules.Division] field stores the numeric value of the [Bedryf.Bednr] field. It is added for future functionality.

EmpID - Resource

The [WorkSchedules.EmpID] field stores the resource, for whom the work schedule applies. In case of default work schedule and division work schedule, the [WorkSchedules.EmpID] field is not filled. The [WorkSchedules.EmpID] field refers to the [Humres.Res_ID] field.

EndTime - End time

The [WorkSchedules.EndTime] field stores the different end time of each period in the work schedule. There can be one or two work schedule parts per day.

ID - Guid

The [WorkSchedules.ID] field stores the Guid per work schedule part that is generated by the system when the schedule (or a separate line) is created.

StartTime - Start time

The [WorkSchedules.StartTime] field stores the different start time of each session in the work schedule. There can be one or two work schedule parts per day.

Syscreated - Created date and time

The [WorkSchedules.Syscreated] field stores the date and time that the work schedule has been created.

Syscreator - Creator

The [WorkSchedules.Syscreator] field stores the resource who created the work schedule. The [WorkSchedules.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [WorkSchedules.Sysmodified] field stores the date and time that the work schedule was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [WorkSchedules.Sysmodifier] field stores the resource who last modified the work schedule. Initially, this field contains the creator as is stored in the [WorkSchedules.Syscreator] field. The [WorkSchedules.Sysmodifier] field refers to the [Humres.Res_ID] field.

Weekday - Weekday

The [WorkSchedules.Weekday] field stores the weekday. The [WorkSchedules.Weekday] field can store one of the following values:

Value	Description
1	Monday
2	Tuesday
3	Wednesday
4	Thursday
5	Friday
6	Saturday
7	Sunday



Chapter 12 | Pwrole - Roles

12. Pwrole - Roles

12.1 General descriptions

The [Pwrole] table stores the security roles created and are used as a master table where these security roles are assigned to users. By default, there are three (3) system roles and a few predefined roles that will be created during Exact Globe installation. System roles such as 'System administrator' and 'Administrator' are always created and users are not able to change the role rights for these roles. Predefined roles such as 'HR', 'Purchase agent' & 'Representative' are created based on the license purchased by the user. Predefined roles are created via script and is also known as fixed roles because the role_id for these roles are fixed (unlike other roles that user creates via Maintain roles application). Each default roles created has the default access rights to the relevant menu path. The table below describes the default role name created, with the respective role ID:

Value	Description
11	HR
25	Purchase Agent
999	Representative
1000	System Administrator

The [Pwrole] table is also used at the 'Maintain: Resources / Rights tab' menu path for both HR and Payroll module.

12.2 Pwrole field descriptions

Descr64 - Description

The [Pwrole.Descr64] field stores the description for the role. This field is filled when a new role is created. The [Pwrole.Descr64] field will be updated when a user changes the description of an existing role and the value will be deleted when a user deletes the role.

Division - Division

The [Pwrole.Division] field stores the division code. The [Pwrole.Division] field stores the numeric value of the [Bedryf.Bedmr] field. This field is not used at this moment. It is added for future functionality.

Job_group - Job group

The [Pwrole.Job_group] field is not used.

Rb_id - Role bar ID

The [Pwrole.Rb_id] field stores the role bar item for the role. This field is filled when user creates the default role bar items for a role and the default value is '0' (i.e no role bar item). The [Pwrole.Rb_id] field will be updated when a user changes the role bar item and the value will be deleted when a user removes the entire role bar item. The [Pwrole.Rb_id] field refers to the [SYSMNU.Mnu_id] field.

Role_id - Role ID

The [Pwrole.Role_id] field stores the role ID for every security role created. The [Pwrole.Role_id] is an auto increment field for each new record created in this table.

Role_name - Role name

The [Pwrole.Role_name] field stores the role name. The [Pwrole.Role_name] field is filled when a new role is created. The [Pwrole.Role_name] field is a unique field and validation will be made against the existing role names. The [Pwrole.Role_name] field will be updated when a user changes the role name of an existing role and the value will be deleted when a user deletes the role.

Syscreated - Created date & time

The [Pwrole.Syscreated] field stores the date and time the security role were created.

Syscreator - Creator

The [Pwrole.Syscreator] field stores the creator ID of the security role. The [Pwrole.Syscreator] field refers to the [Humres.Res_ID] field.

Sysguid - Sysguid

The [Pwrole.Sysguid] field stores the Guid generated by the system upon creation of the security role. It has no functional meaning.

Sysmodified - Modified date & time

The [Pwrole.Sysmodified] field stores the date and time that the security role were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [Pwrole.Sysmodifier] field stores the resource that last modified the security role. Initially, this field contains the creator as is stored in the [Pwrole.Syscreator] field. The [Pwrole.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [Pwrole.Timestamp] field stores the date and time the security role were created.

Visible - Visible

The [Pwrole.Visible] field stores a value that indicates whether the security role is visible or not. The [Pwrole.Visible] field can store one of the following values:

Value	Description
0	Security role is not visible
1	Security role is visible



Chapter 13 | Pwrprm - Role Rights

13. Pwrprm - Role Rights

13.1 General descriptions

The [Pwrprm] table stores the role's rights for each security role created in [Pwrole] table. A record will only be created in the [Pwrprm] table if there is role right assigned to the security role. The role_id field links the [Pwrprm] table and [Pwrole] table.

Note! A record is created in the [Pwrprm] table when menu rights/function rights are being assigned to a security role. The record will be deleted when the role rights to a menu path are removed from the security role. Therefore, when the field descriptions below states that the value in a field is filled or deleted, it means that the record of the table is updated or deleted.

13.2 Pwrprm field descriptions

Division - Division

The [Pwrprm.Division] field stores the division code. The [Pwrprm.Division] field stores the numeric value of the [Bedryf.Bedmr] field. This field is not used at this moment. It is added for future functionality.

Fnc_id - Function ID

The [Pwrprm.Fnc_id] field stores the function id. The [Pwrprm.Fnc_id] field is filled when role rights to a menu path are being assigned to a security role. The value in [Pwrprm.Fnc_id] field will be deleted when the role rights to a menu path are removed from the security role. The [Pwrprm.Fnc_id] field refers to the [Pwfunc.Fnc_id] field.

ID - ID

The [Pwrprm.ID] field stores the system generated database record identification number. This field is not functionally used.

Right_id - Access right ID

The [Pwrprm.Right_id] field stores the access right ID to the menu path. The [Pwrprm.Right_id] field is filled when role right is assigned to a security role. The value in [Pwrprm.Right_id] field will be deleted when role right to a menu path are removed from the security role.

Role_id - Role ID

The [Pwrprm.Role_id] field stores the role ID. The [Pwrprm.Role_id] field is filled when role rights are being assigned to a role. The value in [Pwrprm.Role_id] field will be deleted when the role rights are removed from the role. The [Pwrprm.Role_id] field refers to the [Pwrole.Role_id] field.

Syscreated - Created date & time

The [Pwrprm.Syscreated] field stores the date and time the role right were created.

Syscreator - Creator

The [Pwrprm.Syscreator] field stores the creator ID of the role right. The [Pwrprm.Syscreator] field refers to the [Humres.Res_ID] field.

Sysguid - Sysguid

The [Pwrprm.Sysguid] field stores the Guid generated by the system upon creation of the role right. It has no functional meaning.

Sysmodified - Modified date & time

The [Pwrprm.Sysmodified] field stores the date and time that the role right were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [Pwrprm.Sysmodifier] field stores the resource that last modified the role right. Initially, this field contains the creator as is stored in the [Pwrprm.Syscreator] field. The [Pwrprm.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [Pwrprm.Timestamp] field stores the date and time the role right were created.



Chapter 14 | Pwruc - Roles per company

14. Pwruc - Roles per company

14.1 General descriptions

The [Pwruc] table is used to store information about the roles that users have access. The [Pwruc] table has relation with [Pwrprm] table which stores the access rights/menu paths for each role. The role_id field is used links the [Pwruc] table and [Pwrprm] table.

Certain applications check the records in this table to determine the available functionality for a particular login user when it tries to run some particular applications such as "Maintain human resource".

The [Pwruc] table is used at the following Globe menu path:

System / HR_Security / Security Roles
 System / HR_Security / User Rights
 HR / Human Resources / Maintain / Rights tab

14.2 Pwruc field descriptions

Division - Division

The [Pwruc.Division] field stores the division code. The [Pwruc.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not functionally used at this moment.

ID - ID

The [Pwruc.ID] field stores the system generated database record identification number. This field is not functionally used.

Res_id - Human resource ID

The [Pwruc.Res_id] field stores the employee number. This field is filled up when an employee is assigned with a role. This field is not updatable once created and it will be deleted when the role is removed from the employee. The [Pwruc.Res_id] field refers to the [Humres.Res_id] field.

Role_id - Role ID

The [Pwruc.Role_id] field stores the role ID assigned to an employee/user. This field is created when a role is assigned to the employee. This field is not updatable once created and it will be deleted when the role is no longer assigned to the employee.

Note! The value in the [Pwruc.Role_id] field will be checked when the employee logs on to Exact Globe to determine the accessible menu paths. This value will also be checked when user execute the "Maintain human resource" or "Maintain user application" (to determine the available functionality within the application). The [Pwruc.Role_id] field refers to the [Pwrole.Role_id] field.

Rolelevel - Role level

The [Pwruc.Rolelevel] field is not used.

Syscreated - Created date and time

The [Pwruc.Syscreated] field stores the date and time the users' role was created.

Syscreator - Creator

The [Pwruc.Syscreator] field stores the creator ID of the users' role. The [Pwruc.Syscreator] field refers to the [Humres.Res_ID] field.

Sysguid - Sysguid

The [Pwruc.Sysguid] field stores the Guid generated by the system upon creation of the users' role. It has no functional meaning.

Sysmodified - Modified date and time

The [Pwruc.Sysmodified] field stores the date and time that the users' role were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [Pwruc.Sysmodifier] field stores the resource that last modified the users' role. Initially, this field contains the creator as is stored in the [Pwruc.Syscreator] field. The [Pwruc.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [Pwruc.Timestamp] field stores the date and time the users' role was created.



Chapter 15 | HRRoles - Roles

15. HRRoles - Roles

15.1 General description

The [HRRoles] table stores roles defined for particular resource to determine the rights to access certain information in e-Synergy. This table is linked to the [HRRoleDefs] table for the definition of roles and the [HRRoleLevels] table for the level of rights assigned to the role.

15.2 HRRoles field details

Division - Division

The [HRRoles.Division] field stores the division code of the user's division. The [HRRoles.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used yet. It is added for future functionality.

EmpID - Resource

The [HRRoles.EmpID] field stores the ID of the resource for which the role is defined. The [HRRoles.EmpID] field refers to the [Humres.Res_ID] field.

ID - ID

The [HRRoles.ID] field stores the system generated database record identification number. This field is not functionally used.

RoleID - Role

The [HRRoles.RoleID] field stores the ID of the role definition. The [HRRoles.RoleID] field refers to the [HRRoleDefs.ID] field.

RoleLevel - RoleLevel

The [HRRoles.RoleLevel] field stores the ID of the level of rights assigned to the role. The [HRRoles.RoleLevel] field refers to the [HRRoleLevels.ID] field.



Chapter 16 | HRRoleDefs - Role definitions

16. HRRoleDefs - Role definitions

16.1 General description

The [HRRoleDefs] table stores role definitions in e-Synergy.

16.2 HRRoleDefs field details

Description - Description

The [HRRoleDefs.Description] field stores the description of the role.

Division - Division

The [HRRoleDefs.Division] field stores the division code of the user's division . The [HRRoleDefs.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used yet. It is added for future functionality.

Doc_id - Policy

The [HRRoleDefs.Doc_id] field stores the document ID of the policy document linked to the role. The [HRRoleDefs.Doc_id] field refers to the [Bacodiscussions.ID] field.

ID - ID

The [HRRoleDefs.ID] field stores the identifying code of the role.

JobGroup - JobGroup

The [HRRoleDefs.JobGroup] field is not used.

NTGroup - Domain - Group

The [HRRoleDefs.NTGroup] field stores the domain group linked to the role.



Chapter 17 | HRRoleLevels - Role levels

17. HRRoleLevels - Role levels

17.1 General description

The [HRRoleLevels] table stores levels of rights that can be assigned to a role in e-Synergy. The levels are Corporate, Strategic group, Division, Cost center group, Cost center, Reseller, etc.

17.2 HRRoleLevels field details

Description - Description

The [HRRoleLevels.Description] field stores the description of the level.

Division - Division

The [HRRoleLevels.Division] field is not used yet. It is added for future functionality.

ID - ID

The [HRRoleLevels.ID] field stores the identifying code of the level.

TermID - Term ID

The [HRRoleLevels.TermID] field stores the term ID of the description, which is stored in the [HRRoleLevels.Description] field.



Chapter 18 | Hrsk - Skills

18. Hrsk - Skills

18.1 General description

The [Hrsk] table stores all the skills defined for each resource.

18.2 Hrsk field details

Division - Division

The [Hrsk.Division] field stores the division code of the user's division. The [Hrsk.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used yet. It is added for future functionality.

ID - ID

The [Hrsk.ID] field stores the system generated database record identification number. This field is not functionally used.

Line - Line number

The [Hrsk.Line] field stores the sequence number of the skills defined for a particular resource.

Res_ID - Resource

The [Hrsk.Res_ID] field stores the ID of the resource for which the skill is defined. The [Hrsk.Res_ID] field refers to the [Humres.Res_ID] field.

Skill_type - Skill type

The [Hrsk.Skill_type] field stores the type of skill the resource has attained.

Sklevel - Level

The [Hrsk.Sklevel] field is not used.

Syscreated - Created date and time

The [Hrsk.Syscreated] field stores the date and time that the skill has been created.

Syscreator - Creator

The [Hrsk.Syscreator] field stores the ID of the resource who created the skill. The [Hrsk.Syscreator] field refers to the [Humres.Res_ID] field.

Sysguid - SysGuid

The [Hrsk.SysGuid] field stores the Guid ID generated by the system upon creation of the skill.

Sysmodified - Modified date and time

The [BankAccounts.Sysmodified] field stores the date and time that the cash instrument was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [Hrsk.Sysmodifier] field stores the ID of the resource who last modified the skill. Initially, this field contains the creator as is stored in the [Hrsk.Syscreator] field. The [Hrsk.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [Hrsk.Timestamp] field stores a system generated timestamp. The timestamp field is regenerated upon every change in the [Hrsk] record. This field is mainly used for replication purposes.



Chapter 19 | ResourceStatus - Resource status

19. ResourceStatus - Resource status

19.1 General description

The [ResourceStatus] table stores the resource status. The status is Active, Fulfilled, Hired, Inactive, Rejected, Future, etc.

19.2 ResourceStatus field details

Description - Description

The [ResourceStatus.Description] field stores the description of the status.

Division - Division

The [ResourceStatus.Division] field is not used yet. It is added for future functionality.

Status - Status

The [ResourceStatus.Status] field stores the code of the status.

TermID - Term ID

The [ResourceStatus.TermID] field stores the term ID of the description, which is stored in the [ResourceStatus.Description] field.



Chapter 20 | ResourceTypes - Resource types

20. ResourceTypes - Resource types

20.1 General description

The [ResourceTypes] table stores resource types. The types are Applicant, Contractor, Employee, Customer, Partner, Student, Temporary, Vacancy, etc.

20.2 ResourceTypes field details

Description - Description

The [ResourceTypes.Description] field stores the description of the type.

Division - Division

The [ResourceTypes.Division] field is not used yet. It is added for future functionality.

TermID - Term ID

The [ResourceTypes.TermID] field stores the term ID of the description, which is stored in the [ResourceTypes.Description] field.

Type - Type

The [ResourceTypes.Type] field stores the code of the type.



Chapter 21 | StockOptions - Options

21. StockOptions - Options

21.1 General description

The [StockOptions] table stores the stock options bought on company shares by the employees. To be able to register options, a role with function right 140, 'Create/edit option transactions' is required.

Note! This table is only used in e-Synergy.

21.2 StockOptions field details

CompanyName - Name

The [StockOptions.CompanyName] field stores the description of the options.

Currency - Currency

The [StockOptions.Currency] field stores the code of the currency used in the options. The [StockOptions.Currency] field refers to the [Valuta.Valcode] field.

Division - Division

The [StockOptions.Division] field stores the division code of the user's division. The [StockOptions.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used yet. It is added for future functionality.

EmpID - Resource

The [StockOptions.EmpID] field stores the ID of the resource who has bought the options. The [StockOptions.EmpID] field refers to the [Humres.Res_ID] field.

EndDate - End date

The [StockOptions.EndDate] field stores the expiry date of the options.

ExercisePrice - Exercise price

The [StockOptions.ExercisePrice] field stores the price the company shares have to have before the options start to have value.

ID - ID

The [StockOptions.ID] field stores the system generated database record identification number. This field is not functionally used.

Notes - Remarks

The [StockOptions.Notes] field stores the remarks of the options.

PremiumAmount - Premium

The [StockOptions.PremiumAmount] field stores the amount the employee has bought the options for.

Note! This field is not enabled when the [StockOptions.Type] field = '2'.< /FONT >

Qty - Quantity

The [StockOptions.Qty] field stores the number of stock options purchased by the employee.

Syscreated - Created date and time

The [StockOptions.Syscreated] field stores the date and time that the options have been created.

Syscreator - Creator

The [StockOptions.Syscreator] field stores the ID of the resource who created the options. The [StockOptions.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [StockOptions.Sysmodified] field stores the date and time that the options were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [StockOptions.Sysmodifier] field stores the ID of the resource who last modified the options. Initially, this field contains the creator as is stored in the [StockOptions.Syscreator] field. The [StockOptions.Sysmodifier] field refers to the [Humres.Res_ID] field.

TransactionDate - Transaction : Date

The [StockOptions.TransactionDate] field stores the transaction date of the options.

TransactionType - Type

The [StockOptions.TransactionType] field stores the transaction type of the options. The possible values are:

Value	Description
0	Granted
1	Buy
2	Sell
3	Canceled
4	Expired

VestingDate - Vesting date

The [StockOptions.VestingDate] field stores the date for which the buyer has the rights of ownership for the options. From this date until the expiry date of the options, the buyer has the right to exercise the options.



Chapter 22 | HREffectiveDateDataLog - Effective Date Data Log

22. HREffectiveDateDataLog - Effective Date Data Log

22.1 General Descriptions

The [HREffectiveDateDataLog] tables stores the record of changes done to the human resource information. These records cover changes of crucial human resource information such as employment start date, reporting manager, job title, cost center, employee name and etc. The changes are recorded in a log format to enable authorization of the changes as and when required. The [HREffectiveDateDataLog] tables are used in both Exact e-Synergy and Exact Globe to store information pertaining to human resource changes. The menu paths are as follows:

Exact e-Synergy: HRM/Entry/HRM/Authorize HR Changes

Exact Globe: HR/Entries/Authorize HR Changes

22.2 HREffectiveDateDataLog field details

Division - Division

The [HREffectiveDateDataLog.Division] field stores the division code. The [HREffectiveDateDataLog.Division] field stores the numeric value of the [Bedryf.Bedmr] field. This field is not functionally used at this moment. It is added for future functionality.

EffectiveDate - Effective date

The [HREffectiveDateDataLog.EffectiveDate] field stores the date when the change to the specific resource information is authorized.

FieldName - Field name

The [HREffectiveDateDataLog.FieldName] field stores the name of the field that has been changed.

ID - ID

The [HREffectiveDateDataLog.ID] field contains the system generated database record identification number. This field is not functionally used.

NewValue - New value

The [HREffectiveDateDataLog.NewValue] field stores the new value of the field that has been changed.

OldValue - Old value

The [HREffectiveDateDataLog.OldValue] field stores the old value of the field that has been changed.

Res_id - Resource

The [HREffectiveDateDataLog.Res_id] field stores the resource ID where changes of the resource information has been recorded. The [HREffectiveDateDataLog.Res_id] field refers to the [Humres.Res_id] field.

Status - Status

The [HREffectiveDateDataLog.Status] field stores a value that indicates the status of the resource information changes. The [HREffectiveDateDataLog.Status] field can store one of the following values:

Value	Description
O	Open
A	Authorized
R	Rejected
P	Processed

Syscreated - Created date and time

The [HREffectiveDateDataLog.Syscreated] field stores the date and time the resource information changes were created.

Syscreator - Creator

The [HREffectiveDateDataLog.Syscreator] field stores the creator ID of the resource information changes. The [HREffectiveDateDataLog.Syscreator] field refers to the [Humres.Res_ID] field.

Sysguid - SysGuid

The [HREffectiveDateDataLog.SysGuid] field stores the Guid generated by the system upon creation of the resource information changes. It has no functional meaning.

Sysmodified - Modified date and time

The [HREffectiveDateDataLog.Sysmodified] field stores the date and time that the resource information changes were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HREffectiveDateDataLog.Sysmodifier] field stores the resource that last modified the resource information. Initially, this field contains the creator as is stored in the [HREffectiveDateDataLog.Syscreator] field. The [HREffectiveDateDataLog.Sysmodifier] field refers to the [Humres.Res_ID] field.

TableName - Table name

The [HREffectiveDateDataLog.TableName] field stores the target database table where the new resource information will be stored.

Timestamp - Timestamp

The [HREffectiveDateDataLog.Timestamp] field stores the date and time the resource information changes were created. This field is only used in Exact e-Synergy.

UpdateContractEnd - UpdateContractEnd

The [HrEffectivedateDataLog.UpdateContractEnd] field indicates if the 'HrBgJobs.exe' background job process will be carried out to update the payroll component end date for authorized resource contract end date change. The value '0' indicates that the background job process will proceed. The value '1' indicates that the background job process will not proceed.

Note! The [HrEffectivedateDataLog.UpdateContractEnd] field stores '0' for 'Yes' and '1' for 'No' based on the action of the message prompt 'Do you want to reactivate the existing payroll components?'



Chapter 23 | HRHumresLinks - Resources Link

23. HRHumresLinks - Resources Link

23.1 General descriptions

The [HRHumresLinks] table stores the various types of resource links. The type of resource link is indicated at the [HRHumresLinks.Type] field.

Note! At the time of this documentation, the [HRHumresLinks] table is only used for vacancy handling. The resource links created in this table are of vacancy types where [HRHumresLinks.Type] field has the value 'V'. Functionally, the links are displayed at the following menu path:

Exact Globe

HR/Human resources/Maintain/Vacancies tab

HR/Entries/Applicant/Vacancy

The [HRHumresLinks] table is created to support handling of multiple vacancies. User will be able to add in multiple vacancies from this screen by clicking the 'Add' button. Upon clicking one of the Vacancies, user will be able to fulfill and UN-fulfill the selected vacancies.

23.2 HRHumresLinks field details

ChildID - Children (Applicant)

The [HRHumresLinks.ChildID] field stores the resource/applicant ID of the resource link.

Division - Division

The [HRHumresLinks.Division] field stores the division code. The [HRHumresLinks.Division] field stores the numeric value of the [Bedryf.Bednr] field.

ID - ID

The [HRHumresLinks.ID] field contains the system generated database record identification number. This field is not functionally used.

MainLink - Main link

The [HRHumresLinks.MainLink] field stores a value that indicates whether the vacancy is fulfilled by any applicant or not fulfilled. The [HRHumresLinks.MainLink] field can have one of the following values:

Value	Description
0	Not fulfilled
1	Fulfilled

Res_id - Resource (Vacancy)

The [HRHumresLinks.Res_ID] field stores the vacancy number linked to an applicant.

Syscreated - Created date & time

The [HRHumresLinks.Syscreated] field stores the date and time the resource link were created.

Syscreator - Creator

The [HRHumresLinks.Syscreator] field stores the creator ID of the resource link. The [HRHumresLinks.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date & time

The [HRHumresLinks.Sysmodified] field stores the date and time that the resource link were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HRHumresLinks.Sysmodifier] field stores the resource that last modified the resource link. Initially, this field contains the creator as is stored in the [HRHumresLinks.Syscreator] field. The [HRHumresLinks.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HRHumresLinks.Timestamp] field stores the date and time the resource link were created. This field is only used in Exact e-Synergy.

Type - Type

The [HRHumresLinks.Type] field stores the type of resource link. Currently, this field is only used to store the vacancy link type with the value 'V'.



Chapter 24 | Hrwdoc - Word Merge Documents

24. Hrwdoc - Word Merge Documents

24.1 General descriptions

The [Hrwdoc] table is used to store the word document templates that were created via the following menu path:

System/General/Settings/Document Settings/CRM/Letters

System/General/Settings/Document Settings/HRM/Letters

The path above enables you to create a Word merge template where the relevant fields from the human resources table [Humres] can be inserted into the letter template where appropriate. By doing this, a word document template has been created.

The Word template created above can be used at the following menu path:

HR/Human Resources/Maintain/Word Merge button

Payroll/Human Resources/Maintain/Word Merge button

Once the resource is selected in 'Maintain: Resource', the Word Merge button is enabled. Press on the Word Merge button and the system will insert the values of the selected fields into the document thus creating a document that is addressed specifically to the resource. This facility is only available for letter and fax.

The Word Merge function can also be accessed via the Word Merge icon found at the tool bar in the 'Maintain: Resources' screen. When this icon is selected, all defined word templates is available for selection, and thus a letter/memo can be composed for the specified resource.

24.2 Hrwdoc field details

Descr40_0 - Multilanguage description 0

The [Hrwdoc.Descr40_0] field stores a textual description of the Word merge document.

Note! The [Hrwdoc.Descr40_0] field is the first of five fields that stores such data. The other fields are [Hrwdoc.Descr40_1], [Hrwdoc.Descr40_2], [Hrwdoc.Descr40_3] and [Hrwdoc.Descr40_4].

Descr40_1 - Multilanguage description 1

The [Hrwdoc.Descr40_1] field stores the first alternative language textual description of the Word merge document. This field is only enabled when the 'Description field 2' (at the [Settings.Settingname] field with the value "lang2") under 'Descriptions in list boxes' in the general setting is set with a different language (at the [Settings.StringValue] field).

Note! The [Hrwdoc.Descr40_1] field is the second of five fields that stores such data. The other fields are [Hrwdoc.Descr40_0], [Hrwdoc.Descr40_2], [Hrwdoc.Descr40_3] and [Hrwdoc.Descr40_4].

Descr40_2 - Multilanguage description 2

The [Hrwdoc.Descr40_2] field stores the second alternative language textual description of the Word merge document. This field is only enabled when the 'Description field 3' (at the [Settings.Settingname] field with the value "lang3") under 'Descriptions in list boxes' in the general setting is set with a different language (at the [Settings.StringValue] field).

Note! The [Hrwdoc.Descr40_2] field is the third of five fields that stores such data. The other fields are [Hrwdoc.Descr40_0], [Hrwdoc.Descr40_1], [Hrwdoc.Descr40_3] and [Hrwdoc.Descr40_4].

Descr40_3 - Multilanguage description 3

The [Hrwdoc.Descr40_3] field stores the third alternative language textual description of the Word merge document. This field is only enabled when the 'Description field 4' (at the [Settings.Settingname] field with the value "lang4") under 'Descriptions in list boxes' in the general setting is set with a different language (at the [Settings.StringValue] field).

Note! The [Hrwdoc.Descr40_3] field is the fourth of five fields that stores such data. The other fields are [Hrwdoc.Descr40_0], [Hrwdoc.Descr40_1], [Hrwdoc.Descr40_2] and [Hrwdoc.Descr40_4].

Descr40_4 - Multilanguage description 4

The [Hrwdoc.Descr40_4] field stores the fourth alternative language textual description of the Word merge document. This field is only enabled when the 'Description field 5' (at the [Settings.Settingname] field with the value "lang5") under 'Descriptions in list boxes' in the general setting is set with a different language (at the [Settings.StringValue] field).

Note! The [Hrwdoc.Descr40_4] field is the fifth of five fields that stores such data. The other fields are [Hrwdoc.Descr40_0], [Hrwdoc.Descr40_1], [Hrwdoc.Descr40_2] and [Hrwdoc.Descr40_3].

Division - Division

The [Hrwdoc.Division] field stores the division code. The [Hrwdoc.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used at this moment. It is added for future functionality.

Doc_code - Document template name

The [Hrwdoc.Doc_code] field stores the name of the document template. This is a unique code with a maximum length of 8 characters.

Docid - Document GUID

The [Hrwdoc.Docid] field stores the system generated document GUID. This field is not functionally used.

ID - ID

The [Hrwdoc.ID] field stores the system generated database record identification number. This field is not functionally used.

MergeType - Merge Type

The [Hrwdoc.MergeType] field stores a value that indicates the type of merging for the document template. The [Hrwdoc.MergeType] field can store one of the following values:

Value	Description
X	CRM template such as quotation
Null	HRM template such as Confirmation, Appointment, letter of offer, release letter and target letter

Syscreated - Created date & time

The [Hrwdoc.Syscreated] field stores the date and time the Word merge document were created.

Syscreator - Creator

The [Hrwdoc.Syscreator] field stores the creator ID of the Word merge document. The [Hrwdoc.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - Sysguid

The [Hrwdoc.SysGuid] field stores the Guid generated by the system upon creation of the Word merge document. It has no functional meaning.

Sysmodified - Modified date & time

The [Hrwdoc.Sysmodified] field stores the date and time that the Word merge document were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [Hrwdoc.Sysmodifier] field stores the resource that last modified the Word merge document. Initially, this field contains the creator as is stored in the [Hrwdoc.Syscreator] field. The [Hrwdoc.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [Hrwdoc.Timestamp] field stores the date and time the Word merge document were created.

Type - Type

The [Hrwdoc.Type] field stores a value that indicates the type of Word merge document. The [Hrwdoc.Type] field can store one of the following values:

Value	Description
H	For template such as appointment, confirmation, release, offer letter
C	For quotation template
T	For target letter template



Chapter 25 | HRCompetencies - Competency

25. HRCompetencies - Competency

25.1 General description

The [HRCompetencies] table stores competency to be used in competency management. The competency is used to create resources' competency profiles. By default 13 competency is predefined. The number of the competency cannot be changed, but the description can. To be able to change the competency, the role with specific function right '346' (Resource competencies) is required.

Note! This table is used in competency management if the 'Competency method' setting is set to 'Simple'.

25.2 HRCompetencies field details

Description - Description

The [HRCompetencies.Description] field stores the description of the competency.

Division - Division

The [HRCompetencies.Division] field is not used yet. It is added for future functionality.

ID - ID

The [HRCompetencies.ID] field stores the system generated database record identification number. This field is not functionally used.

Sysmodified - Modified date and time

The [HRCompetencies.Sysmodified] field stores the date and time that the competency was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HRCompetencies.Sysmodifier] field stores the ID of the resource who last modified the competency. Initially, this field contains the creator. The [HRCompetencies.Sysmodifier] field refers to the [Humres.Res_ID] field.



Chapter 26 | HRCompetencyRatings - HRCompetencyRatings

26. HRCompetencyRatings - HRCompetencyRatings

26.1 General description

The [HRCompetencyRatings] table stores the resources' competency profiles with all rated competency on a specific date. A resource is rated base on the competency defined for his job activity. To view or edit resources' competency profiles, a role with specific function right '346' (Resource competencies) and '359' (View/Edit Competency) is required.

Note! This table is used in competency management if the 'Competency method' setting is set to 'Simple'. This table is only used in e-Synergy.

26.2 HRCompetencyRatings field details

CompetencyID - Competency

The [HRCompetencyRatings.CompetencyID] field stores the ID of the competency used in the competency profile. The [HRCompetencyRatings.CompetencyID] field refers to the [HRCompetencies.ID] field.

Division - Division

The [HRCompetencyRatings.Division] field stores the division code of the division for which the competency profile is valid. The [HRCompetencyRatings.Division] field stores the numeric value of the [Bedryf.Bednrn] field. This field is not used yet. It is added for future functionality.

EmpID - Resource

The [HRCompetencyRatings.EmpID] field stores the ID of the resource for the competency profile. The [HRCompetencyRatings.EmpID] field refers to the [Humres.Res_ID] field.

ID - ID

The [HRCompetencyRatings.ID] field stores the system generated database record identification number. This field is not functionally used.

Rating - Rating

The [HRCompetencyRatings.Rating] field stores the rating for each competency used in the competency profile.

ReferenceDate - Reference: date

The [HRCompetencyRatings.ReferenceDate] field stores the reference date of the competency profile.

Syscreated - Created date and time

The [HRCompetencyRatings.Syscreated] field stores the date and time that the competency profile has been created.

Syscreator - Creator

The [HRCompetencyRatings.Syscreator] field stores the ID of the resource who has created the competency profile. The [HRCompetencyRatings.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [HRCompetencyRatings.Sysmodified] field stores the date and time that the competency profile was last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HRCompetencyRatings.Sysmodifier] field stores the ID of the resource who last modified the competency profile. Initially, this field contains the creator as is stored in the [HRCompetencyRatings.Syscreator] field. The [HRCompetencyRatings.Sysmodifier] field refers to the [Humres.Res_ID] field.



Chapter 27 | HRMCompetenceGroups - HRMCompetenceGroups

27. HRMCompetenceGroups - HRMCompetenceGroups

27.1 General descriptions

The [HRMCompetenceGroups] table stores the structure of the competences in groups. The competence groups belong to the highest level. In the competence group the number of levels of the competence model can be defined.

As some of the competencies can be narrowed down to a few levels as sub-competence, the competence group is necessary to build up after all the competencies are well categorized with respective specification.

The [HRMCompetenceGroups] table is used at the following e-Synergy menu path:

HRM: Maintenance/Competency Management:Competence Groups

NOTE!

- Note that the following only apply for e-Synergy and not for Exact Globe 2003. Competence management is not a part of Exact Globe 2003 and also will not be in batch 370.
- Resources with the 'HR - Division level and above', or any other resource with a role, with function rights 505 and 508 are able to create competence group.

27.2 HRMCompetenceGroups field descriptions

CreatedBy - Creator

The [HRMCompetenceGroups.CreatedBy] field stores the creator ID of the competence group. The [HRMCompetenceGroups.CreatedBy] field refers to the [Humres.Res_ID] field.

CreatedDate - Created date and time

The [HRMCompetenceGroups.CreatedDate] field stores the date and time the competence group was created.

Description - Description

The [HRMCompetenceGroups.Description] field stores the user defined description of the competence group.

Division - Division

The [HRMCompetenceGroups.Division] field stores the division code. The [HRMCompetenceGroups.Division] field refers to the [Bedryf.Division] field.

ID - ID

The [HRMCompetenceGroups.ID] field stores the system generated database record identification number. This field is not functionally used.

Levels - Level

The [HRMCompetenceGroups.Level] field stores the number of sub-competency levels of the competence group. Each competence group can have a maximum of 4 levels of sub-competency.

ModifiedBy - Modifier

The [HRMCompetenceGroups.ModifiedBy] field stores the resource that last modified the competence group. Initially, this field contains the creator as is stored in the [HRMCompetenceGroups.CreatedBy] field. The [HRMCompetenceGroups.ModifiedBy] field refers to the [Humres.Res_ID] field.

ModifiedDate - Modified date and time

The [HRMCompetenceGroups.ModifiedDate] field stores the date and time that the competence group were last modified. Initially, this field contains the creation date.

Type - Type

The [HRMCompetenceGroup.Type] field stores the type of competence group. The [HRMCompetenceGroups.Type] field can store one of the following values:

Value	Description
C	Competency
S	Skill
R	Resume
Q	Questionnaire
M	Miscellaneous



Chapter 28 | HRMCompetenceProfiles - HRMCompetenceProfiles

28. HRMCompetenceProfiles - HRMCompetenceProfiles

28.1 General descriptions

The [HRMCompetenceProfiles] table stores the list of resource's competency profiles created for different job groups/job activity/job title in e-Synergy. The [HRMCompetencyProfiles] table also stores the final rating for the resource's competency profile.

The resource's competence profile can be found at the following menu paths in e-Synergy:

- HRM / Maintenance / Job groups
- HRM / Maintenance / Job activities
- HRM / Maintenance / Job titles

Note!

- Note that the following only apply for e-Synergy and not for Exact Globe. Competence management is not a part of Exact Globe and also will not be in batch 370.
- Resources with the 'HR - Division level and above', or any other resource with a role, with function rights 505 and 508 are able to create competence profile.

28.2 HRMCompetenceProfiles field descriptions

CompanyCode - Company Code

The [HRMCompetenceProfiles.CompanyCode] field stores the division code when the competence profile is created.

CreatedBy - Creator

The [HRMCompetenceProfiles.CreatedBy] field stores the creator ID of the competence profile.

The [HRMCompetenceProfiles.CreatedBy] field refers to the [Humres.Res_ID] field.

CreatedDate - Created date and time

The [HRMCompetenceProfiles.CreatedDate] field stores the date and time the competence profile was created.

Description - Description

The [HRMCompetenceProfiles.Description] field stores the user defined description of the competence profile.

Division - Division

The [HRMCompetenceProfiles.Division] field stores the division code. The [HRMCompetenceProfiles.Division] field refers to the [Bedryf.Division] field.

EndDate - End date

The [HRMCompetenceProfiles.EndDate] field stores the last date where the resource's competence profile is active.

ID - ID

The [HRMCompetenceProfiles.ID] field stores the system generated database record identification number. This field is not functionally used.

ItemCode - Item code

The [HRMCompetenceProfiles.ItemCode] field is not functionally used. The [HRMCompetenceProfiles.ItemCode] field refers to the [Items.ItemCode] field.

JobActivity - Job activity

The [HRMCompetenceProfiles.JobActivity] field stores the specific job activity where the competence profile is created from.

Note! The job activity, job group and job title are elements that forms the job system within e-Synergy. It defines the functional skills set structure of resources in an organization. A competence profile can be created which links to any of these elements. Therefore, the [HRMCompetenceProfiles.JobActivity] field is only filled if the competence profile is created from the job activity.

JobGroup - Job group

The [HRMCompetenceProfiles.JobGroup] field stores the specific job group where the competence profile is created from.

Note! The job activity, job group and job title are elements that forms the job system within e-Synergy. It defines the functional skills set structure of resources in an organization. A competence profile can be created which links to any of these elements. Therefore, the [HRMCompetenceProfiles.JobGroup] field is only filled if the competence profile is created from the job group.

JobTitle - Job title

The [HRMCompetenceProfiles.JobTitle] field stores the specific job title where the competence profile is created from. The [HRMCompetenceProfiles.JobTitle] field refers to the [Hrjbtl.Job_title] field.

Note! The job activity, job group and job title are elements that forms the job system within e-Synergy. It defines the functional skills set structure of resources in an organization. A competence profile can be created which links to any of these elements. Therefore, the [HRMCompetenceProfiles.JobTitle] field is only filled if the competence profile is created from the job title.

ModifiedBy - Modifier

The [HRMCompetenceProfiles.ModifiedBy] field stores the resource that last modified the competence profile. Initially, this field contains the creator as is stored in the [HRMCompetenceProfiles.CreatedBy] field. The [HRMCompetenceProfiles.ModifiedBy] field refers to the [Humres.Res_ID] field.

ModifiedDate - Modified date and time

The [HRMCompetenceProfiles.ModifiedDate] field stores the date and time that the competence profile were last modified. Initially, this field contains the creation date.

Project - Project

The [HRMCompetenceProfiles.Project] field stores the project code where the resource's competence profile is linked to. The [HRMCompetenceProfiles.Project] field refers to the [PrProject.ProjectNr] field.

Rating - Rating

The [HRMCompetenceProfiles.Rating] field stores the final rating of the resource's competence profile.

Note! The [HRMCompetenceProfiles.Rating] field is only filled if a final rating has been allocated for the resource.

RequestId - Request ID

The [HRMCompetenceProfiles.RequestID] field stores the request ID of the request sent to the reviewer workflow to inform the reviewer of a resource review activity.

RequestStartDate - Request start date

The [HRMCompetenceProfiles.RequestStartDate] field stores the date the workflow request is created and sent to the reviewer.

ResourceId - Resource ID

The [HRMCompetenceProfiles.ResourceId] field stores the resource ID of the resource attached to the competency profile. The [HRMCompetenceProfiles.ResourceId] field refers to the [Humres.Res_ID] field.

ReviewerId - Reviewer ID

The [HRMCompetenceProfiles.ReviewerId] field stores the resource ID of the reviewer, which are usually the Manager/HR Personnel in charge of reviewing the resource.

StartDate - Start date

The [HRMCompetenceProfiles.StartDate] field stores the first date where the resource's competence profile is active.

Status - Status

The [HRMCompetenceProfiles.Status] field stores a value that indicates the status of the resource's review result for the competency profile. The [HRMCompetenceProfiles.Status] field can store one of the following values:

Value	Description
N	None
R	Reviewed
F	Final
O	Open
D	Draft

Type - Type

The [HRMCompetenceProfiles.Type] field stores a value that indicates the type of source where the resource's competence profile is created. The [HRMCompetenceProfiles.Type] field can store one of the following values:

Value	Description
G	Job group
A	Applicant
T	Job title
EE	Edit Employee
NE	New Employee
R	Resource
V	Vacancy
C	Job activity

Note! The value 'NE' and 'EE' is stored when the competence field is used at form layout.

Weight - Weight

The [HRMCompetenceProfiles.Weight] field stores the weight of the resource's competence profile.



Chapter 29 | HRMCompetences - HRMCompetences

29. HRMCompetences - HRMCompetences

29.1 General descriptions

The [HRMCompetences] table stores the master data (i.e. the competences) of the competence management concept. There are a few rules that define the structure of the competences stored in the [HRMCompetences] table:

- A competence is always linked to a competence group (stored in [HRMCompetenceGroups]).
- A field type (from [HRMFieldTypes] table) is always linked to a competence. The type of data that can be stored in a competence is determined by the field type that is linked to the competence.
- A competence can only belong to one level.
- Competence model enable the creation of more levels.
- One competence can belong to two different competence groups [HRMCompetenceGroups] or to two different competences. This means that it is possible to link competences to each other.

Note!

- Note that the following only apply for e-Synergy and not for Exact Globe. Competence management is not a part of Exact Globe and also will not be in batch 370.
- Resources with the 'HR - Division level and above', or any other resource with a role, with function rights 505 and 508 are able to create competences.

29.2 HRMCompetences field descriptions

CreatedBy - Creator

The [HRMCompetences.CreatedBy] field stores the creator ID of the competence. The [HRMCompetences.CreatedBy] field refers to the [Humres.Res_ID] field.

CreatedDate - Created date and time

The [HRMCompetences.CreatedDate] field stores the date and time the competence was created.

Description - Description

The [HRMCompetences.Description] field stores the user defined description of the competence.

Division - Division

The [HRMCompetences.Division] field stores the division code. The [HRMCompetences.Division] field refers to the [Bedryf.Division] field.

DocAttachmentID - Policy

The [HRMCompetences.DocAttachmentID] field stores the document ID of the policy that is linked to the competence. The policy document is linked from [BacoDiscussions.ID] field.

FieldTypeId - Field type ID

The [HRMCompetences.FieldTypeId] field stores the identification number of the competence's field type. The [HRMCompetences.FieldTypeId] field refers to the [HRMFieldTypes.ID] field.

Note! The [HRMCompetences.FieldTypeId] is a mandatory field.

GroupId - Group ID

The [HRMCompetences.GroupId] field stores the identification number of the competence's competence group. The [HRMCompetences.GroupId] field refers to the [HRMCompetenceGroups.ID] field.

Note! The [HRMCompetenceGroups.ID] field is also filled for competences that are on a higher level than level 1.

ID - ID

The [HRMCompetences.ID] field stores the system generated database record identification number. This field is not functionally used.

Level - Level

The [HRMCompetences.Level] field stores the level of the competence.

LinkedToId - Linked to ID

The [HRMCompetences.LinkedToId] field stores the identification number that links the competences to each other on the same level at [HRMCompetences.Level].

Note! The [HRMCompetences.LinkedToId] field is used in scenario when one competence belongs to two competence groups. In that case two competences must be created. For functionality later in the process, these competences can be linked together.

ModifiedBy - Modifier

The [HRMCompetences.ModifiedBy] field stores the resource that last modified the competence. Initially, this field contains the creator as is stored in the [HRMCompetences.CreatedBy] field. The [HRMCompetences.ModifiedBy] field refers to the [Humres.Res_ID] field.

ModifiedDate - Modified date and time

The [HRMCompetences.ModifiedDate] field stores the date and time that the competence were last modified. Initially, this field contains the creation date.

Notes - Notes

The [HRMCompetences.Notes] field stores the user defined definition for the competence.

ParentId - Parent ID

The [HRMCompetences.ParentId] field stores the identification number of the competence that is linked by a lower level competence. For example, if the competence group has two levels. Then, all level 2 competences are linked to a competence in level 1 indicated in this field. This also means the [HRMCompetences.ParentId] field is empty for competences on level 1.

SequenceNumber - Sequence number

The [HRMCompetences.SequenceNumber] field stores the sequence number of the competence.

Type - Type

The [HRMCompetences.Type] field stores the type of competence. The [HRMCompetences.Type] field can store one of the following values:

Value	Description
C	Competency
S	Skill
A	Attitude



Chapter 30 | HRMCompetenceLinks - HRM Competence Links

30. HRMCompetenceLinks - HRM Competence Links

30.1 General descriptions

The [HRMCompetenceLinks] table stores the actual values of the competences that are linked to a profile. Depending on the number of competences linked to a profile, every single value recorded for the competence will be stored, such as a resource's education is 'University' or rating for communication is a 'C'.

The type of data that can be stored is very diverse; therefore a column/record is created in the [HRMCompetenceLinks] table for every field type defined in [HRMFieldTypes] table.

Note!

- Note that the following only apply for e-Synergy and not for Exact Globe. Competence management is not a part of Exact Globe and also will not be in batch 370.
- Resources with the 'HR - Division level and above', or any other resource with a role, with function rights 505 and 508 are able to create competence link.

30.2 HRMCompetenceLinks field descriptions

Competenceld - Competence ID

The [HRMCompetenceLinks.Competenceld] field stores the competence ID of the competence link.

The [HRMCompetenceLinks.Competenceld] field refers to the [HRMCompetences.ID] field.

CreatedBy - Creator

The [HRMCompetenceLinks.CreatedBy] field stores the creator ID of the competence link.

The [HRMCompetenceLinks.CreatedBy] field refers to the [Humres.Res_ID] field.

CreatedDate - Created date and time

The [HRMCompetenceLinks.CreatedDate] field stores the date and time the competence link was created.

DateValue - Date value

The [HRMCompetenceLinks.DateValue] field stores the actual date value when the [HRMFieldTypes.Type] field stores the value 'D'. The value in [HRMFieldTypes.Type] field can be retrieved from the competence linked by the [HRMCompetenceLinks.Competenceld] field.

Division - Division

The [HRMCompetenceLinks.Division] field stores the division code. The [HRMCompetenceLinks.Division] field refers to the [Bedryf.Division] field.

DoubleValue - Double value

The [HRMCompetenceLinks.DoubleValue] field stores the actual double value when the [HRMFieldTypes.Type] field stores the value 'N'. The value in [HRMFieldTypes.Type] field can be retrieved from the competence linked by the [HRMCompetenceLinks.Competenceld] field.

FormElementId - Form element ID

The [HRMCompetenceLinks.FormElementId] field stores the form element ID of the competence link. The [HRMCompetenceLinks.FormElementId] field refers to the [HRMFormElements.ID] field.

GroupSequenceNr - Group sequence number

The [HRMCompetenceLinks.GroupSequenceNr] field stores the group sequence number of the competence link.

GuidValue - Guid value

The [HRMCompetenceLinks.GuidValue] field stores the actual Guid value when the [HRMFieldTypes.Type] field stores the value 'A' or 'R'. The value in [HRMFieldTypes.Type] field can be retrieved from the competence linked by the [HRMCompetenceLinks.Competenceld] field.

ID - ID

The [HRMCompetenceLinks.ID] field stores the system generated database record identification number. This field is not functionally used.

ModifiedBy - Modifier

The [HRMCompetenceLinks.ModifiedBy] field stores the resource that last modified the competence link. Initially, this field contains the creator as is stored in the [HRMCompetenceLinks.CreatedBy] field. The [HRMCompetenceLinks.ModifiedBy] field refers to the [Humres.Res_ID] field.

ModifiedDate - Modified date and time

The [HRMCompetenceLinks.ModifiedDate] field stores the date and time that the competence link were last modified. Initially, this field contains the creation date.

ProfileId - Profile ID

The [HRMCompetenceLinks.ProfileId] field stores the profile ID associated with the competence link. The [HRMCompetenceLinks.ProfileId] field refers to the [HRMCompetenceProfiles.ID] field.

SelectionValue - Selection value

The [HRMCompetenceLinks.SelectionValue] field stores the actual selection value when the [HRMFieldTypes.Type] field stores the value 'V'. The value in [HRMFieldTypes.Type] field can be retrieved from the competence linked by the [HRMCompetenceLinks.Competenceld] field.

StringValue - String value

The [HRMCompetenceLinks.StringValue] field stores the actual string value when the [HRMFieldTypes.Type] field stores the value 'T'. The value in [HRMFieldTypes.Type] field can be retrieved from the competence linked by the [HRMCompetenceLinks.Competenceld] field.

Weight - Weight

The [HRMCompetenceLinks.Weight] field stores the weight of the desired value for a competence in its profile. The [HRMCompetenceLinks.Weight] field is used for matching purposes.

YesNoValue - Yes/No value

The [HRMCompetenceLinks.YesNoValue] field stores the actual yes/no value when the [HRMFieldTypes.Type] field stores the value 'Y'. The value in [HRMFieldTypes.Type] field can be retrieved from the competence linked by the [HRMCompetenceLinks.Competenceld] field.



Chapter 31 | HRMSelectionValues - HRM Selection Values

31. HRMSelectionValues - HRM Selection Values

31.1 General descriptions

The [HRMSelectionValues] table stores all the possible selection/test values of a field type (where it is only applicable if [HRMFieldTypes.Type] field has the value 'V'). The field type and the selection/test values have a one to many relationships. The [HRMSelectionValues] table also makes it possible to indicate the weight of the selection/test values and to provide a description to the selection/test values.

Note!

- Note that the following only apply for e-Synergy and not for Exact Globe. Competence management is not a part of Exact Globe and also will not be in batch 370.
- Resources with the 'HR - Division level and above', or any other resource with a role, with function rights 505 and 508 are able to create selection/test values.

31.2 HRMSelectionValues field descriptions

CreatedBy - Creator

The [HRMSelectionValues.CreatedBy] field stores the creator ID of the selection/test value.

The [HRMSelectionValues.CreatedBy] field refers to the [Humres.Res_ID] field.

CreatedDate - Created date and time

The [HRMSelectionValues.CreatedDate] field stores the date and time the selection/test value was created.

Description - Description

The [HRMSelectionValues.Description] field stores the description of the selection/test value.

DisplayValue - Display value

The [HRMSelectionValues.DisplayValue] field stores the selection/test value that will be displayed on screen.

Note! The [HRMSelectionValues.DisplayValue] will be optionally shown if the selection/test values are shown in a combo box. This also means that the [HRMSelectionValues.SequenceNumber] field and [HRMSelectionValues.DisplayValue] field isn't just shown anywhere.

Division - Division

The [HRMSelectionValues.Division] field stores the division code. The [HRMSelectionValues.Division] field refers to the [Bedryf.Division] field.

FieldTypeId - Field type ID

The [HRMSelectionValues.FieldTypeId] field stores the field type ID of the selection/test value.

The [HRMSelectionValues.FieldTypeId] field refers to the [HRMFieldTypes.ID] field.

Note! A record in [HRMSelectionValues] can only exist when the [HRMFieldTypes.Type] field stores the value 'V'.

ID - ID

The [HRMSelectionValues.ID] field stores the system generated database record identification number. This field is not functionally used.

Maximum - Maximum

The [HRMSelectionValues.Maximum] field stores the maximum value of the selection/test value created.

Minimum - Minimum

The [HRMSelectionValues.Minimum] field stores the minimum value of the selection/test value created.

ModifiedBy - Modifier

The [HRMSelectionValues.ModifiedBy] field stores the resource that last modified the selection/test value. Initially, this field contains the creator as is stored in the [HRMSelectionValues.CreatedBy] field. The [HRMSelectionValues.ModifiedBy] field refers to the [Humres.Res_ID] field.

ModifiedDate - Modified date and time

The [HRMSelectionValues.ModifiedDate] field stores the date and time that the selection/test value were last modified. Initially, this field contains the creation date.

Notes - Notes

The [HRMSelectionValues.Notes] field stores the user defined definition of the selection/test value.

SequenceNumber - Sequence number

The [HRMSelectionValues.SequenceNumber] field stores the sequence number that indicates the display order of the selection/test value in a combo box.

Value - Value

The [HRMSelectionValues.Value] field stores an internal number of the selection/test value. The [HRMSelectionValues.Value] field will be used for referencing at the [HRMCompetenceLinks.SelectionValue] field.

Weight - Weight

The [HRMSelectionValues.Weight] field stores a value that indicates the weight of the selection/test value. The weight is used for matching, evaluation and review purposes.



Chapter 32 | HRMFormLayouts - HRMFormLayouts

32. HRMFormLayouts - HRMFormLayouts

32.1 General descriptions

The [HRMFormLayouts] table stores several types of form layouts such as vacancy, applicant, resource, customer and etc. These are usually the fixed type form layouts that can be customized by the user. The user can also create new form layout so that for different type of vacancy, they can have a different screen dependent on the vacancy.

Note! The [HRMFormLayouts] table is only used in e-Synergy. By default, resources with the following role can access the functionality mentioned above, or any other resource with a role, where function rights 147, 121 and 524 is added to:

- Administrator
- HR
- HR Assistant
- Customer Manager
- Reseller Manager

32.2 HRMFormLayouts field descriptions

Assortment - Assortment

The [HRMFormLayouts.Assortment] field stores the assortment code of the item card form layout.

CompanyCode - Company code

The [HRMFormLayouts.CompanyCode] field stores the division code where the form layout belongs.

CreatedBy - Creator

The [HRMFormLayouts.CreatedBy] field stores the creator ID of the form layout. The [HRMFormLayouts.CreatedBy] field refers to the [Humres.Res_ID] field.

CreatedDate - Created date and time

The [HRMFormLayouts.CreatedDate] field stores the date and time the form layout was created.

Description - Description

The [HRMFormLayouts.Description] field stores the user defined description of the form layout. This description is visible on the screen.

Division - Division

The [HRMFormLayout.Division] field stores the division code. The [HRMFormLayout.Division] field refers to the [Bedryf.Division] field.

ID - ID

The [HRMFormLayouts.ID] field stores the system generated database record identification number. This field is not functionally used.

ModifiedBy - Modifier

The [HRMFormLayouts.ModifiedBy] field stores the resource that last modified the form layout. Initially, this field contains the creator as is stored in the [HRMFormLayouts.CreatedBy] field. The [HRMFormLayouts.ModifiedBy] field refers to the [Humres.Res_ID] field.

ModifiedDate - Modified date and time

The [HRMFormLayouts.ModifiedDate] field stores the date and time that the form layout were last modified. Initially, this field contains the creation date.

Type - Type

The [HRMFormLayouts.Type] field stores a value that indicates the type of form layout. The [HRMFormLayouts.Type] field is used to determine whether the form layout is fixed type for default employee card or a vacancy dependent applicant card. The [HRMFormLayouts.Type] field can store one of the following values:

Value	Description
EV	Edit Vacancy
NV	New Vacancy
RV	Read Vacancy
EA	Edit Applicant
NA	New Applicant
RA	Read Applicant
EE	Edit Employee (Resource)
NE	New Employee (Resource)
RE	Read Employee (Resource)
EP	Edit Employee Self-Service Portal
RP	Read Employee Self-Service Portal
NP	New Employee Self-Service Portal
RK	Read Customer
RR	Read Partner



Chapter 33 | HRMFormElements - HRMFormElements

33. HRMFormElements - HRMFormElements

33.1 General descriptions

The [HRMFormElements] table stores the elements belonging to a form layout shown on the screen. There are two categories of elements stored in the [HRMFormElements] table. The first category of elements is from fields that belong to the [Humres] table. The other category of elements is from the competences stored in the [HRMCompetences] table. All the elements stored are used to create form layout stored in [HRMFormLayouts] table.

For every record of element, an indication can be set to determine the type of role that is allowed to view and/or edit the field. The roles available are as follows:

- The resource
- The manager
- The resource with specific function right
- The resource with security level.

It is also possible to indicate whether a field will be visible (at the [HRMFormElements.Deselect] field) on the screen and the location (at the [HRMFormElements.SequenceNumber] field) where the field will be displayed.

Note! The [HRMFormElements] table is only used in e-Synergy. By default, resources with the following role can access the functionality mentioned above, or any other resource with a role, where function rights 147, 121 and 524 is added to:

- Administrator
- HR
- HR Assistant
- Customer Manager
- Reseller Manager

33.2 HRMFormElements field descriptions

AddEmptyValue - Add empty value

The [HRMFormElements.AddEmptyValue] field stores the empty value used in a combo box on the screen.

AutoAuthorizeRole - Auto authorize role

The [HRMFormElements.AutoAuthorizeRole] field is not used.

AutoAuthorizeRoleLevel - Auto authorize role level

The [HRMFormElements.AutoAuthorizeRoleLevel] field is not used.

Caption - Caption

The [HRMFormElements.Caption] field stores the competence name displayed on the screen. The [HRMFormElements.Caption] field is used when the form element is a section header on the screen.

ColumnCount - Column count

The [HRMFormElements.ColumnCount] field stores a value that determines in which column the field will be displayed on the screen. The [HRMFormElements.ColumnCount] field can store one of the following values:

Value	Description
1	Left column
2	Right column

CreatedBy - Creator

The [HRMFormElements.CreatedBy] field stores the creator ID of the form element. The [HRMFormElements.CreatedBy] field refers to the [Humres.Res_ID] field.

CreatedDate - Created date and time

The [HRMFormElements.CreatedDate] field stores the date and time the form element was created.

Deselect - Deselect

The [HRMFormElements.Deselect] field stores a value that indicates whether a form element is hidden or not hidden from the screen. The [HRMFormElements.Deselect] field can store one of the following values:

Value	Description
1	Hide
0	Unhide

Division - Division

The [HRMFormElements.Division] field stores the division code. The [HRMFormElements.Division] field refers to the [Bedryf.Division] field.

EditFunction - Edit function

The [HRMFormElements.EditFunction] field stores the function rights ID belonging to a resource that contain the rights to edit the form element.

EditManager - Edit manager

The [HRMFormElements.EditManager] field stores a value that indicates whether the resource's manager is allowed to edit the form element for his/her subordinates. The [HRMFormElements.EditManager] field can store one of the following values:

Value	Description
1	Allowed
0	Not allowed

EditResource - Edit resource

The [HRMFormElements.EditResource] field stores a value that indicates whether the resource is allowed to edit his/her own resource card. The [HRMFormElements.EditResource] field can store one of the following values:

Value	Description
1	Allowed
0	Not allowed

EditSecurityLevel - Edit security level

The [HRMFormElements.EditSecurityLevel] field stores the security level that is allowed to edit the form element.

Note! Any security level number that is higher than the stored security level number is also allowed to edit the form element.

EffectiveDateLog - Effective date log

The [HRMFormElements.EffectiveDateLog] field stores a value that indicates whether the form element has effective date log function. The [HRMFormElements.EffectiveDateLog] field can store one of the following values:

Value	Description
1	Effective date log is ON
0	Effective date log is OFF

FormLayoutId - Form layout ID

The [HRMFormElements.FormLayoutId] field stores the form layout ID of the form element. This is because every form element belongs to a form layout. The [HRMFormElements.FormLayoutId] field refers to the [HRMFormLayouts.ID] field.

ID - ID

The [HRMFormElements.ID] field stores the system generated database record identification number. This field is not functionally used.

IsGroup - Is group

The [HRMFormElements.IsGroup] field stores a value that indicates whether a form element is a group field or not. The [HRMFormElements.IsGroup] field can store one of the following values:

Value	Description
1	Form element is a group field
0	Form element is not a group field

IsRadioSet - Is radio set

The [HRMFormElements.IsRadioSet] field stores a value that indicates whether radio button need to be shown on a combo box on the screen. The [HRMFormElements.IsRadioSet] field can store one of the following values:

Value	Description
1	Radio button shown
0	Radio button not shown

Mandatory - Mandatory

The [HRMFormElements.Mandatory] field stores a value that indicates whether a form element is a mandatory field or not a mandatory field. The [HRMFormElements.Mandatory] field can store one of the following values:

Value	Description
0	Not mandatory
1	Mandatory
2	System mandatory

ModifiedBy - Modifier

The [HRMFormElements.ModifiedBy] field stores the resource that last modified the form element. Initially, this field contains the creator as is stored in the [HRMFormElements.CreatedBy] field. The [HRMFormElements.ModifiedBy] field refers to the [Humres.Res_ID] field.

ModifiedDate - Modified date and time

The [HRMFormElements.ModifiedDate] field stores the date and time that the form element were last modified. Initially, this field contains the creation date.

ParentElementId - Parent element ID

The [HRMFormElements.ParentElementId] field stores the ID that link the form element to another form element that belongs to the same group (if any). For example, five fields can be linked to one form element which is a section header. The [HRMFormElements.ParentElementId] field refers to the [HRMFormElements.ID] field.

Reference - Reference

The [HRMFormElements.Reference] field stores the SQL-column names of the form element. The [HRMFormElements.Reference] field is used when data from [Humres] table must be shown on the screen.

RequireAuthorize - Require authorize

The [HRMFormElements.RequireAuthorize] field is not used.

SequenceNumber - Sequence number

The [HRMFormElements.SequenceNumber] field stores all the related form element position number based on the location of the element on the screen.

ShowKeyInCombo - Show key in combo

The [HRMFormElements.ShowKeyInCombo] field stores a value that indicates whether the [HRMSelectionValues.DisplayValue] will be shown when using a combo box. The [HRMFormElements.ShowKeyInCombo] field can store one of the following values:

Value	Description
1	Shown
0	Not shown

TermID - Term ID

The [HRMFormElements.TermID] field stores the term ID of the form element.

UserDefineCaption - User define caption

The [HRMFormElements.UserDefineCaption] field stores the user defined display name of the form element.

ViewFunction - View function

The [HRMFormElements.ViewFunction] field stores the function rights ID belonging to a resource that contain the rights to view the form element.

ViewManager - View manager

The [HRMFormElements.ViewManager] field stores a value that indicates whether the resource's manager is allowed to view the form element for his/her subordinates. The [HRMFormElements.ViewManager] field can store one of the following values:

Value	Description
1	Allowed
0	Not allowed

ViewResource - View resource

The [HRMFormElements.ViewResource] field stores a value that indicates whether the resource is allowed to view his/her own resource card. The [HRMFormElements.ViewResource] field can store one of the following values:

Value	Description
1	Allowed
0	Not allowed

ViewSecurityLevel - View security level

The [HRMFormElements.ViewSecurityLevel] field stores the security level that is allowed to view the form element.

Note! Any security level number that is higher than the stored security level number is also allowed to view the form element.



Chapter 34 | HRProcessLogs - HR Process Logs

34. HRProcessLogs - HR Process Logs

34.1 General descriptions

The [HRProcessLogs] table stores all the generated HR requests based on the HR activities. These requests are stored to verify if a request is already generated and to enable sequential requests.

Note! The [HRProcessLogs] table is created as part of the three tables created to be used in the intelligent process flow management. The other two tables are [HRProcessTypes] and [HRProcessRequests].

34.2 HRProcessLogs field details

Division - Division

The [HRProcessLogs.Division] field stores the division code. The [HRProcessLogs.Division] field refers to the [Bedryf.Division] field.

EmpID - Employee ID

The [HRProcessLogs.EmpID] field stores the resource ID involved in the HR request that is stored in the HR process log.

FieldName - Field name

The [HRProcessLogs.FieldName] field stores the field name used for process actions. The [HrProcessLogs.FieldName] field is used for viewing purposes.

HREffectiveDateDataLogID - HR effective date data log ID

The [HRProcessLogs.HREffectiveDateDataLogID] field stores the generated request based on the record in [HREffectiveDateDataLog] table. The [HrProcessLogs.HREffectiveDateDataLogID] field is used for viewing purposes.

ID - ID

The [HRProcessLogs.ID] field stores the system generated database record identification number. This field is not functionally used.

OriginalRequest - Original request

The [HRProcessLogs.OriginalRequest] field stores the request ID where the process action is generated. The [HrProcessLogs.OriginalRequest] field is used for viewing purposes.

ProcessRequestsID - Process requests ID

The [HRProcessLogs.ProcessRequestsID] field stores requests ID generated for the HR process.

The [HRProcessLogs.ProcessRequestsID] field refers to the [HRProcessTypes.ID] field.

ReferenceDate - Reference date

The [HRProcessLogs.ReferenceDate] field stores the original date of the request generated for the HR process.

Note! The value stored in [HRProcessLogs.ReferenceDate] field is determined based on the [HRProcessRequests.Status] field and [HRProcessRequests.UseRequest] field.

RequestId - Request ID

The [HRProcessLogs.RequestId] field stores the generated request ID from absences.

RunNumber - Run number

The [HRProcessLogs.RunNumber] field stores the run number of the request based on [HRProcessRequests.NumberFrequency] field.

Syscreated - Created date and time

The [HRProcessLogs.Syscreated] field stores the date and time the HR request was created.

Syscreator - Creator

The [HRProcessLogs.Syscreator] field stores the creator ID of the HR request. The [HRProcessLogs.CreatedBy] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [HRProcessLogs.Sysmodified] field stores the date and time that the HR request were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HRProcessLogs.Sysmodifier] field stores the resource that last modified the HR request. Initially, this field contains the creator as is stored in the [HRProcessLogs.Syscreator] field. The [HRProcessLogs.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HRProcessLogs.Timestamp] field stores the date and time the HR request was created.



Chapter 35 | HRProcessTypes - HR Process Types

35. HRProcessTypes - HR Process Types

35.1 General descriptions

The [HRProcessTypes] table stores all types of HR processes used as alert via the process types' screen. It can be filtered by type and status or even by division. From here, the user will be able to see the type of alert that has been set up as well as the start date and end date of the HR actions. These actions can be set by division level or corporate level.

Note! By default, users with the following roles are able to view and edit the process types' screen.

- HR - Corporate level
- HR - Group level
- HR - Division level

35.2 HRProcessTypes field details

Active - Active

The [HRProcessTypes.Active] field stores a value that indicates whether a HR process type is active or not active. The [HRProcessTypes.Active] field can store one of the following values:

Value	Description
1	Active
0	Not active

AutoGenerate - Auto generate

The [HRProcessTypes.AutoGenerate] field stores a value that indicates whether the HR process type is started automatically from a background job or initiated from the HR cockpit. The [HRProcessTypes.AutoGenerate] field can store one of the following values:

Value	Description
1	Auto generate (background job)
0	Not auto generate (HR cockpit)

Blocked - Blocked

The [HRProcessTypes.Blocked] field stores a value that indicates whether a HR process type is blocked or not blocked. The [HRProcessTypes.Blocked] field can store one of the following values:

Value	Description
1	Blocked
0	Not blocked

CompanyCode - Division

The [HRProcessTypes.CompanyCode] field stores the division code of the company.

CreateRole_1 - View: Role (1)

The [HRProcessTypes.CreateRole_1] field stores the first role ID that a resource must have in order to be allowed to view the HR process type. The [HRProcessTypes.CreateRole_1] field refers to the [HRRoleDefs.ID] field.

CreateRole_2 - View: Role (2)

The [HRProcessTypes.CreateRole_2] field stores the second role ID that a resource must have in order to be allowed to view the HR process type. The [HRProcessTypes.CreateRole_2] field refers to the [HRRoleDefs.ID] field.

CreateRole_3 - View: Role (3)

The [HRProcessTypes.CreateRole_3] field stores the third role ID that a resource must have in order to be allowed to view the HR process type. The [HRProcessTypes.CreateRole_3] field refers to the [HRRoleDefs.ID] field.

CreateRoleLevel_1 - View: Level (of role) (1)

The [HRProcessTypes.CreateRoleLevel_1] field stores the first role level ID that a resource must have in order to be allowed to view the HR process type. The [HRProcessTypes.CreateRoleLevel_1] field refers to the [HRRoleLevels.ID] field.

CreateRoleLevel_2 - View: Level (of role) (2)

The [HRProcessTypes.CreateRoleLevel_2] field stores the second role level ID that a resource must have in order to be allowed to view the HR process type. The [HRProcessTypes.CreateRoleLevel_2] field refers to the [HRRoleLevels.ID] field.

CreateRoleLevel_3 - View: Level (of role) (3)

The [HRProcessTypes.CreateRoleLevel_3] field stores the third role level ID that a resource must have in order to be allowed to view the HR process type. The [HRProcessTypes.CreateRoleLevel_3] field refers to the [HRRoleLevels.ID] field.

Description - Description

The [HRProcessTypes.Description] field stores the user defined description of the HR process type.

Division - Division

The [HRProcessTypes.Division] field stores the division code. The [HRProcessTypes.Division] field refers to the [Bedryf.Division] field.

EndDate - End date

The [HRProcessTypes.EndDate] field stores the end date of the HR process type. The HR process type will be set to inactive once it reaches the end date.

FieldName - Field

The [HRProcessTypes.FieldName] field stores a value that indicates the type of field to be displayed on the screen based on the value the user select in [HRProcessTypes.ProcessType] field. The table below describes the scenarios that govern this field:

Value in FieldName	Value in ProcessType	Description
NULL	1	Not used
NULL	2	Not used
1	3	Display combo box with values obtained from records in [HREffectiveDateDataLog] table
1	4	Display combo box with all fields from [Humres] table that has the 'datetime' field type

ID - ID

The [HRProcessTypes.ID] field stores the unique ID of the HR process type.

ProcessManager - Generate: Managers - For: Subordinates

The [HRProcessTypes.ProcessManager] field stores a value that indicates if a manager of the resource involved can generate the actions/requests. The [HRProcessTypes.ProcessManager] field can store one of the following values:

Value	Description
0	Direct + Indirect (Include direct subordinates and indirect subordinates)
1	Direct (Only direct subordinates)
2	No (No one is allowed to view the actions/request)

Note! The [HRProcessTypes.ProcessManager] field refers to the [EbcProps.SelectionValues] field where [EbcProps.PropName] field stores the value 'CreateManager'.

ProcessRole_1 - Generate: Role (1)

The [HRProcessTypes.ProcessRole_1] field stores the first role ID that a resource must have in order to be allowed to generate the HR process type. The [HRProcessTypes.ProcessRole_1] field refers to the [HRRoleDefs.ID] field.

ProcessRole_2 - Generate: Role (2)

The [HRProcessTypes.ProcessRole_2] field stores the second role ID that a resource must have in order to be allowed to generate the HR process type. The [HRProcessTypes.ProcessRole_2] field refers to the [HRRoleDefs.ID] field.

ProcessRole_3 - Generate: Role (3)

The [HRProcessTypes.ProcessRole_3] field stores the third role ID that a resource must have in order to be allowed to generate the HR process type. The [HRProcessTypes.ProcessRole_3] field refers to the [HRRoleDefs.ID] field.

ProcessRoleLevel_1 - Generate: Level (of role) (1)

The [HRProcessTypes.ProcessRoleLevel_1] field stores the first role level ID that a resource must have in order to be allowed to generate the HR process type. The [HRProcessTypes.ProcessRoleLevel_1] field refers to the [HRRoleLevels.ID] field.

ProcessRoleLevel_2 - Generate: Level (of role) (2)

The [HRProcessTypes.ProcessRoleLevel_2] field stores the second role level ID that a resource must have in order to be allowed to generate the HR process type. The [HRProcessTypes.ProcessRoleLevel_2] field refers to the [HRRoleLevels.ID] field.

ProcessRoleLevel_3 - Generate: Level (of role) (3)

The [HRProcessTypes.ProcessRoleLevel_3] field stores the third role level ID that a resource must have in order to be allowed to generate the HR process type. The [HRProcessTypes.ProcessRoleLevel_3] field refers to the [HRRoleLevels.ID] field.

ProcessType - Type

The [HRProcessTypes.ProcessType] field stores a value that indicates the type of HR process/actions. The [HRProcessTypes.ProcessType] can store one of the following values:

Value	Description
1	Request type
2	Employment contract
3	Employee Data: Date (Humres)
4	Employee Data: Effective date (HREffectiveDateDataLog)

RequestType - Request type

The [HRProcessTypes.RequestType] field stores a value that indicates the way the request type field will be displayed on screen based on the value in [HRProcessTypes.ProcessType] field. The table below describes the scenarios that govern this field:

Value in FieldName	Value in ProcessType	Description
0	1	The Request Type field will be visible for user to select the request type
11001	2	-
NULL	3	Not used
NULL	4	Not used

RightsManager - View: Managers - For: Subordinates

The [HRProcessTypes.RightsManager] field stores a value that indicates if a manager of the resource involved can view the actions/requests. The [HRProcessTypes.ProcessManager] field can store one of the following values:

Value	Description
0	Direct + Indirect (Include direct subordinates and indirect subordinates)
1	Direct (Only direct subordinates)
2	No (No one is allowed to view the actions/request)

Note! The [HRProcessTypes.RightsManager] field refers to the [EbcProps.SelectionValues] field where [EbcProps.PropName] field stores the value 'CreateManager'.

SecurityLevel - Security level

The [HRProcessTypes.SecurityLevel] field stores the security level that is allowed to view the generated HR process types.

StartDate - Start date

The [HRProcessTypes.StartDate] field stores the start date of the HR process type.

Syscreated - Created date and time

The [HRProcessTypes.Syscreated] field stores the date and time the HR process type was created.

Syscreator - Creator

The [HRProcessTypes.SysCreator] field stores the creator ID of the HR process type. The [HRProcessTypes.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [HRProcessTypes.Sysmodified] field stores the date and time that the HR process type were last modified . Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HRProcessTypes.Sysmodifier] field stores the resource that last modified the HR process type. Initially, this field contains the creator as is stored in the [HRProcessTypes.Syscreator] field. The [HRProcessTypes.Sysmodifier] field refers to the [Humres.Res_ID] field.

TableName - Table name

The [HrProcessTypes.TableName] field stores the table name associated with the HR process type. The [HrProcessTypes.TableName] can store one of the following values based on the [HRProcessTypes.ProcessType] field:

Value in ProcessType	Value in TableName
1	Absences
2	Absences
3	HREffectiveDateDataLog
4	Humres

Timestamp - Timestamp

The [HRProcessTypes.Timestamp] field stores the date and time the HR process type was created.



Chapter 36 | HRProcessRequests - HR Process Requests

36. HRProcessRequests - HR Process Requests

36.1 General descriptions

The [HRProcessRequests] table stores the various process requests setup by user to carry out HR activities. These process requests can be automatically triggered as alerts to inform users as and when a HR activity is needed. It also provides the functionality on how frequent the user would like the system to alert them on those actions set. Alert can be set in terms of task, checked task or any other form of request type defined by user. These alerts will be sent to the resource workflow once it is generated either manually or automatically via background job. In other words, it acts as a reminder to the user in order for them to take further actions on certain HR activities.

Note! By default, users with the following roles are able to view and edit the process request screen.

- HR - Corporate level
- HR - Group level
- HR - Division level

36.2 HRProcessRequests field details

Active - Active

The [HRProcessRequests.Active] field stores a value that indicates whether the process request is active or not active. The [HRProcessRequests.Active] field can store one of the following values:

Value	Description
1	Active
0	Not active

Blocked - Blocked

The [HRProcessRequests.Blocked] field stores a value that indicates whether a process request is blocked or not blocked. The [HRProcessRequests.Blocked] field can store one of the following values:

Value	Description
1	Blocked
0	Not blocked

Days - Days

The [HRProcessRequests.Days] field stores the number of days, either negative (days before) or positive (days after). The [HRProcessRequests.Days] field is used to determine when to generate the process request based on the start date of the request.

Example 1:

If the start date of the request = 02/06/2005, and the days is set to 0, therefore the end date = 02/06/2005 + duration.

Example 2:

If the start date of the request = 02/06/2005, and the days is set to 2, therefore the end date = 04/06/2005 + duration

Description - Description

The [HRProcessRequests.Description] field stores the description that will be used as the description of the process request generated.

Division - Division

The [HRProcessRequests.Division] field stores the division code. The [HRProcessRequests.Division] field refers to the [Bedryf.Division] field.

DurationInDays - Duration

The [HRProcessRequests.DurationInDays] field stores the number of days to determine the end date of the request that is yet to be generated based on the start date of the request.

Example:

If the start date of the request = 02/06/2005, and the duration is set to 1, therefore the end date to generate the request = 02/06/2005 + 1, will be 03/06/2005. The last date to generate the request would be 03/06/2005. If user does not generate the request by 03/06/2005, the request will be considered overdue and will not be generated again.

EmpID - Resource

The [HRProcessRequests.EmpID] field stores the resource ID of the process request.

FreeBoolField_1 - Free Bool Field 1

The [HRProcessRequests.FreeBoolField_1] field is the first Boolean free field that the user can use. This can then be used to trigger a request.

FreeBoolField_2 - Free Bool Field 2

The [HRProcessRequests.FreeBoolField_2] field is the second Boolean free field that the user can use. This can then be used to trigger a request.

Freefield_1 - Free field 1

The [HRProcessRequests.FreeField_1] field is the first unique identifier free field that the user can use. This can then be used to trigger a request.

Freefield_2 - Free field 2

The [HRProcessRequests.FreeField_2] field is the second unique identifier free field that the user can use. This can then be used to trigger a request.

FreeIntegerField_1 - Free integer field 1

The [HRProcessRequests.FreeIntegerField_1] field is the first integer free field that the user can use. This can then be used to trigger a request.

FreeIntegerField_2 - Free integer field 2

The [HRProcessRequests.FreeIntegerField_2] field is the second integer free field that the user can use. This can then be used to trigger a request.

FreeNumberField_1 - Free number field 1

The [HRProcessRequests.FreeNumberField_1] field is the first float free field that the user can use. This can then be used to trigger a request.

FreeNumberField_2 - Free number field 2

The [HRProcessRequests.FreeNumberField_2] field is the second float free field that the user can use. This can then be used to trigger a request.

FreeTextField_1 - Free text field 1

The [HRProcessRequests.FreeTextField_1] field is the first variable character free field that the user can use. This can then be used to trigger a request.

FreeTextField_2 - Free text field 2

The [HRProcessRequests.FreeTextField_2] field is the second variable character free field that the user can use. This can then be used to trigger a request.

Frequency - Frequency

The [HRProcessRequests.Frequency] field stores the frequency of the process request. The [HRProcessRequests.Frequency] field can store one of the following values:

Value	Description
0	Once only
1	Yearly
2	Quarterly
3	Monthly
4	Weekly
5	Daily

ID - ID

The [HRProcessRequests.ID] field stores the unique ID of the process request.

Maximum - Maximum

The [HRProcessRequests.Maximum] field stores the maximum number of times to generate the process request.

Example:

If recurrence (NumberFrequency) is set to 2, frequency is set to daily and maximum is set to 5, it means the system will generate the maximum of 5 times for every 2 days.

NumberFrequency - Frequency cycle (Recurrence)

The [HRProcessRequests.NumberFrequency] field stores the user defined frequency cycle of the process request.

Example:

If recurrence is set to 2 and frequency is set to daily, the system will generate the process request every 2 days once.

Overdue - Generate: Overdue

The [HRProcessRequests.Overdue] field stores a value that indicates whether to generate an overdue process request or not.

The [HRProcessRequests.Overdue] field can store one of the following values:

Value	Description
1	Generate overdue process request
0	Do not generate overdue process request

PreviousRequest - Previous request

The [HRProcessRequests.PreviousRequest] field stores the previous request type ID, which indicates the request type used. If this field is filled, the filled request type will overrules the request type from [HRProcessTypes] table, which must be monitored.

Note! The [HRProcessRequests.PreviousRequest] field is only enabled if [HRProcessRequests.UseRequest] has the value '2' (Previous Request) and [HRProcessTypes.ProcessType] has the value '1' (Request Type).

ProcessDescription - Description

The [HRProcessRequests.ProcessDescription] field stores the user defined description of the process action.

ProcessTypesID- Process type ID

The [HRProcessRequests.ProcessTypesID] field stores the user defined ID of the process types.

Remark - Remark

The [HRProcessRequests.Remark] field is not used.

RequestType - Request type

The [HRProcessRequests.RequestType] field stores the ID of the request type that will be generated.

SequenceNumber - Sequence number

The [HRProcessRequests.SequenceNumber] field stores the sequence number of the process.

Status - Request Status/Contract Status

The [HRProcessRequests.Status] field stores the status of the original or previous request in order to generate the process action. The [HRProcessRequests.Status] field can store one of the following values based on the conditions below:

Request Status

If [HRProcessTypes.ProcessType] field stores the value '1' (Request Type)

Value	Description
0	Open
1	Approved
2	Rejected
3	Processed
4	Realized

Contract Status

If [HRProcessTypes.ProcessType] field stores the value '2' (Contract Agreement)

Value	Description
6	BWBEPAALD (Bepaalde tijd)
7	BWONBEPAALD (Onbepaalde tijd)

Note! Only applicable to Dutch legislation

Syscreated - Created date and time

The [HRProcessRequests.Syscreated] field stores the date and time the process request was created.

Syscreator - Creator

The [HRProcessRequests.Syscreator] field stores the creator ID of the process request. The [HRProcessRequests.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [HRProcessRequests.Sysmodified] field stores the date and time that the process request were last modified . Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HRProcessRequests.Sysmodifier] field stores the resource that last modified the process requests. Initially, this field contains the creator as is stored in the [HRProcessRequests.Syscreator] field. The [HRProcessRequests.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HRProcessRequests.Timestamp] field stores the date and time the process request was created.

UseDate - Use: Date

The [HRProcessRequests.UseDate] field stores a value that indicates the date used for the process request based on the following conditions:

If [ProcessTypes.ProcessType] field stores the value '1'

Value	Description
1	Original start date
2	Original end date
3	Previous start date
4	Previous end date
5	Date of approval (approved)
6	Date of realize (realized)
7	Date of processed (processed)

Note! The [HRProcessRequests.UseDate] field with value '3' and '4' will only be displayed if [HRProcessRequests.PreviousRequest] field is not NULL.

If [ProcessTypes.ProcessType] field stores the value '2'

Value	Description
8	Start date contract
9	End date contract

UseRequest - Use: Request

The [ProcessRequests.UseRequest] field stores a value that indicates which request type used to monitor the status based on the following conditions:

If [ProcessTypes.ProcessType] field stores the value '1'

Value	Description
1	Original request
2	Previous request

If [ProcessTypes.ProcessType] field stores the value '2'

Value	Description
1	Original contract
2	Latest contract

Note! If [ProcessRequests.SequenceNumber] field has the value '1', the [ProcessRequests.UseRequest] field will also be storing the value '1'.



Chapter 37 | HRFreeFields - HR Free Fields

37. HRFreeFields - HR Free Fields

37.1 General Description

The [HRFreeFields] table stores the various types of free fields defined by user for use in a division's resource card as additional fields. It allows user to customize the fields for different divisions in different countries. The [HRFreeFields] table is only used in e-Synergy.

There are 4 types of free fields that a user can define in the resource card, namely the date, number, text and 'Yes/No' field. Each type of field allow up to 5 customizable fields for a resource card.

Note! By default, users with the following function rights are able to maintain the following HR free fields:

- Insert free fields for a division - 89 (Default role: HR, Level: Division)
- View free fields in the resource card - Linked as manager, the manager only can see the free fields of his/her subordinates
- View free fields in the resource search - 193 (Default role: HR, HR assistant, level: Division)
- View free fields in resource report - 204 (Default role: HR, HR assistant, Level: Division)

37.2 HRFreeFields Field Details

CompanyNr - Company number

The [HRFreeFields.CompanyNr] field stores the division code of the company where the free fields are defined.

DateField1 - Date field 1

The [HRFreeFields.DateField1] field stores the name or description of the first date field that will be displayed in the resource card.

DateField2 - Date field 2

The [HRFreeFields.DateField2] field stores the name or description of the second date field that will be displayed in the resource card.

DateField3 - Date field 3

The [HRFreeFields.DateField3] field stores the name or description of the third date field that will be displayed in the resource card.

DateField4 - Date field 4

The [HRFreeFields.DateField4] field stores the name or description of the fourth date field that will be displayed in the resource card.

DateField5 - Date field 5

The [HRFreeFields.DateField5] field stores the name or description of the fifth date field that will be displayed in the resource card.

Division - Division

The [HRFreeFields.Division] field stores the division code of the free field. The [HRFreeFields.Division] field refers to the [Bedryf.Division] field.

ID - ID

The [HRFreeFields.ID] field stores the system generated database record identification number. This field is not functionally used.

NumberField1 - Number field 1

The [HRFreeFields.NumberField1] field stores the name or description of the first number field that will be displayed in the resource card.

NumberField2 - Number field 2

The [HRFreeFields.NumberField2] field stores the name or description of the second number field that will be displayed in the resource card.

NumberField3 - Number field 3

The [HRFreeFields.NumberField3] field stores the name or description of the third number field that will be displayed in the resource card.

NumberField4 - Number field 4

The [HRFreeFields.NumberField4] field stores the name or description of the fourth number field that will be displayed in the resource card.

NumberField5 - Number field 5

The [HRFreeFields.NumberField5] field stores the name or description of the fifth number field that will be displayed in the resource card.

TableName - Table name

The [HRFreeFields.TableName] field stores the group where the free fields are used. This will be defined in the repository's business component. At the moment, only [Humres] table group is using the free fields.

TextField1 - Text field 1

The [HRFreeFields.TextField1] field stores the name or description of the first text field that will be displayed in the resource card.

TextField2 - Text field 2

The [HRFreeFields.TextField2] field stores the name or description of the second text field that will be displayed in the resource card.

TextField3 - Text field 3

The [HRFreeFields.TextField3] field stores the name or description of the third text field that will be displayed in the resource card.

TextField4 - Text field 4

The [HRFreeFields.TextField4] field stores the name or description of the fourth text field that will be displayed in the resource card.

TextField5 - Text field 5

The [HRFreeFields.TextField5] field stores the name or description of the fifth text field that will be displayed in the resource card.

YesNoField1 - Yes/No field 1

The [HRFreeFields.YesNoField1] field stores the name or description of the first 'Yes/No' field that will be displayed in the resource card.

YesNoField2 - Yes/No field 2

The [HRFreeFields.YesNoField2] field stores the name or description of the second 'Yes/No' field that will be displayed in the resource card.

YesNoField3 - Yes/No field 3

The [HRFreeFields.YesNoField3] field stores the name or description of the third 'Yes/No' field that will be displayed in the resource card.

YesNoField4 - Yes/No field 4

The [HRFreeFields.YesNoField4] field stores the name or description of the fourth 'Yes/No' field that will be displayed in the resource card.

YesNoField5 - Yes/No field 5

The [HRFreeFields.YesNoField5] field stores the name or description of the fifth 'Yes/No' field that will be displayed in the resource card.



Chapter 38 | HREmployeePeriods - HR Employee Periods

38. HREmployeePeriods - HR Employee Periods

38.1 General Description

The [HREmployeePeriods] table stores the employee period calculated after the absence entitlement is generated once for the employee for a particular period. The absence entitlements are stored in the [Absences] table. The storing of employee period record in the [HREmployeePeriods] table also ensures that entitlements for an employee are only done once for the same period.

38.2 HREmployeePeriods Field Details

DaysAbsent - Days absent

The [HREmployeePeriods.DaysAbsent] field stores the number of absent days taken by the employee.

DaysWorked - Days worked

The [HREmployeePeriods.DaysWorked] field stores the number of days that the employee has worked when the employee period is generated.

Division - Division

The [HREmployeePeriods.Division] field stores the division code. The [HREmployeePeriods.Division] field refers to the [Bedryf.Division] field.

EmpID - Resource ID

The [HREmployeePeriods.EmpID] field stores the resource ID of the employee period generated.

FinPeriod - Financial period

The [HREmployeePeriods.FinPeriod] field stores the financial period when the employee period is generated.

FinYear - Financial year

The [HREmployeePeriods.FinYear] field stores the financial year when the employee period is generated.

HoursAbsent - Hours absent

The [HREmployeePeriods.HoursAbsent] field stores the hours absent when the employee period is generated.

HoursWorked - Hours worked

The [HREmployeePeriods.HoursWorked] field stores the hours worked when the employee period is generated.

ID - ID

The [HREmployeePeriods.ID] field stores the system generated database record identification number. This field is not functionally used.

Syscreated - Created date and time

The [HREmployeePeriods.Syscreated] field stores the date and time the employee period was created.

Syscreator - Creator

The [HREmployeePeriods.Syscreator] field stores the creator ID of the employee period. The [HREmployeePeriods.Syscreator] field refers to the [Humres.Res_ID] field.

Sysmodified - Modified date and time

The [HREmployeePeriods.Sysmodified] field stores the date and time the employee period were last modified. Initially, this field contains the creation date.

Sysmodifier - Modifier

The [HREmployeePeriods.Sysmodifier] field stores the resource that last modified the employee period. Initially, this field contains the creator as is stored in the [HREmployeePeriods.Syscreator] field. The [HREmployeePeriods.Sysmodifier] field refers to the [Humres.Res_ID] field.



Chapter 39 | HRErrorLog - HR Error Log

39. HRErrorLog - HR Error Log

39.1 General Descriptions

The [HRErrorLog] table is used to store detailed messages (error logs) of mail merges and Excel reports generation pertaining to HRM related logging. This information is later used to generate reports for users to check the statuses of their background jobs. The background job or application that writes record to the [HRErrorLog] table is known as 'HRMail'.

39.2 HRErrorLog Field Details

AppName - Application name

The [HRErrorLog.AppName] field stores the name of the application logging the message. The [HRErrorLog.AppName] field stores one of the following values:

Value	Description
MAILMERGE	For HRMail background job
NULL	For Request Merge job

Comp - Comp

The [ErrorLog.Comp] field is not used.

Created - Created date and time

The [HRErrorLog.Created] field stores the date and time the error log was created.

Creator - Creator

The [HRErrorLog.Creator] field stores the creator ID of the error log. The [HRErrorLog.Creator] field refers to the [Humres.Res_ID] field.

Description - Remarks

The [HRErrorLog.Description] field stores the actual log message. The types of messages stored are based on the value in the [HRErrorLog.TransType] field.

Division - Division

The [HRErrorLog.Division] field stores the division code. The [HRErrorLog.Division] field refers to the [Bedryf.Division] field.

ID - ID

The [HRErrorLog.ID] field stores the system generated database record identification number. This field is not functionally used.

Status - Status

The [HRErrorLog.Status] field stores the status of the mail merge process in the error log. The [HRErrorLog.Status] can store one of the following values:

Value	Description
Completed	Mail merge completed
Error	Error in mail merge
Open	Mail merge pending
Processed	Mail merge successful

TransID - Transaction ID

The [HRErrorLog.TransID] field stores the system generated identification number of each individual export or mail merge function. The value in [HRErrorLog.TransID] field is used as a foreign key at the [MailMergePending.LogID] field.

TransType - Transaction type

The [HRErrorLog.TransType] field stores a value that indicates the type of log messages:

Value	Description
1	Error message
2	Success message

Note! The error/success messages are stored in the [HRErrorLog.Description] field.

Value1 - E-mail

The [HRErrorLog.Value1] field stores the recipient e-mail address of the Excel report mail merge process.

Value2 - Value 2

The [HRErrorLog.Value2] field is not used.

Value3 - Value 3

The [HRErrorLog.Value3] field is not used.



Chapter 40 | HRPasswds - HR Passwords

40. HRPasswds - HR Passwords

40.1 General Description

The [HRPasswds] table stores the standard pre-defined HR password. The standard pre-defined HR password will be used in the mechanism of generating new user's password.

40.2 HRPasswds Field Details

ID - ID

The [HRPasswds.ID] field stores the system generated database record identification number. This field is not functionally used.

Type - Type

The [HRPasswds.Type] field stores a value that indicates the type of character used to generate the user password. The [HRPasswds.Type] field can store one of the following values:

Value	Description
1	Special character
0	Pre-defined words

Note! The special character and pre-defined words are stored in the [HRPasswds.Word] field.

Word - Word

The [HRPasswds.Word] field stores the special character of pre-defined words used to generate the user password.

Division - Division

The [HRPasswds.Division] field stores the division code. The [HRPasswds.Division] field refers to the [Bedryf.Division] field.



Chapter 41 | Hrloc - Contract locations

41. Hrloc - Contract locations

41.1 General Description

The [Hrloc] table stores all the different locations defined for a division. The locations created are used in Maintain resources to indicate where the resources are located permanently and temporarily. The [Hrloc] table is only used for e-Synergy.

41.2 Hrloc Field Details

addr_no - Number

The [Hrloc.addr_no] field stores the address number of the location.

addr_suf - Suffix

The [Hrloc.addr_suf] field stores the address suffix of the location.

City - City

The [Hrloc.City] field stores the city of the location.

country - Country

The [Hrloc.country] field stores the country code whether the location is situated. The [Hrloc.country] field refers to the [Land.Landcode] field.

descr50 - Description

The [Hrloc.descr50] field stores the description of the location.

Division - Division

The [Hrloc.Division] field stores the division code to which the location belongs. The [Hrloc.Division] field stores the numeric value of the [Bedryf.Bedrn] field. This field is not used yet. It is added for future functionality.

faxnr - Fax

The [Hrloc.faxnr] field stores the fax number of the location.

ID - ID

The [Hrloc.ID] field stores the unique ID of the location for a division.

Loc - Location

The [Hrloc.Loc] field stores the location code. The [Hrloc.Loc] is a mandatory field.

Postcode - Postal code

The [Hrloc.Postcode] field stores the postcode of the location.

StateCode - State

The [Hrloc.StateCode] field stores the state code of the location.

street_0 - Address

The [Hrloc.street_0] field stores the first textual address of the location.

street_1 - Address 2

The [Hrloc.street_1] field stores the second textual address of the location.

syscreated - Created date and time

The [Hrloc.syscreated] field stores the date and time the location was created.

syscreator - Creator

The [Hrloc.syscreator] field stores the creator ID of the location. The [Hrloc.Syscreator] field refers to the [Humres.Res_ID] field.

sysguid - Sysguid

The [Hrloc.sysguid] field stores the Guid generated by the system upon creation of the location. It has no functional meaning.

sysmodified - Modified date and time

The [Hrloc.sysmodified] field stores the date and time the location were last modified. Initially, this field contains the creation date.

sysmodifier - Modifier

The [Hrloc.sysmodifier] field stores the resource that last modified the location. Initially, this field contains the creator as is stored in the [Hrloc.Syscreator] field. The [Hrloc.Sysmodifier] field refers to the [Humres.Res_ID] field.

Telnr - Telephone

The [Hrloc.Telnr] field stores the telephone number of the location.

timestamp - Timestamp

The [Hrloc.timestamp] field stores the date and time the location was created.

WeekendEnd - Weekend End

The [Hrloc.WeekendEnd] field stores the weekend end day as selected by the user for the location. The [Hrloc.WeekendEnd] field can store one of the following values:

Value	Description
1	Monday
2	Tuesday
3	Wednesday
4	Thursday
5	Friday
6	Saturday
7	Sunday

Note! The [Hrloc.WeekendStart] field stores the value '6', indicating Saturday by default.

xaddress2 - Extra address

The [Hrloc.xaddress2] field is not used.

WeekendStart - Weekend Start

The [Hrloc.WeekendStart] field stores the weekend start day as selected by the user for the location. The [Hrloc.WeekendStart] field can store one of the following values:

Value	Description
1	Monday
2	Tuesday
3	Wednesday
4	Thursday
5	Friday
6	Saturday
7	Sunday



Chapter 42 | CompanyClassNames - Organization groups

42. CompanyClassNames - Organization groups

42.1 General description

The [CompanyClassNames] table stores the organization groups in e-Synergy. Each group may contain multiple subgroups. The subgroups are stored in the [CompanyClasses] table.

42.2 CompanyClassNames field details

ClassID - Group

The [CompanyClassNames.ClassID] field stores the code of the group.

Description - Description

The [CompanyClassNames.Description] field stores the description of the group.

Division - Division

The [CompanyClassNames.Division] field is not used yet. It is added for future functionality.

Timestamp - Timestamp

The [CompanyClassNames.Timestamp] field stores a system generated timestamp. The timestamp field is regenerated upon every change in the [CompanyClassNames] record. This field is mainly used for replication purposes.



Chapter 43 | CompanyClasses - Organization subgroups

43. CompanyClasses - Organization subgroups

43.1 General description

The [CompanyClasses] table stores the organization subgroups in e-Synergy. Multiple subgroups can be defined for each organization group. The organization groups are stored in the [CompanyClassNames] table.

43.2 CompanyClasses field details

ClassID - Group

The [CompanyClasses.ClassID] field stores the code of the group. The [CompanyClasses.ClassID] field refers to the [CompanyClassNames.ClassID] field.

CompanyClassCode - Subgroup

The [CompanyClasses.CompanyClassCode] field stores the code of the subgroup.

Description - Description

The [CompanyClasses.Description] field stores the description of the subgroup.

Division - Division

The [CompanyClasses.Division] field is not used yet. It is added for future functionality.

ID - ID

The [CompanyClasses.ID] field stores the system generated database record identification number. This field is not functionally used.

Timestamp - Timestamp

The [CompanyClasses.Timestamp] field stores a system generated timestamp. The timestamp field is regenerated upon every change in the [CompanyClasses] record. This field is mainly used for replication purposes.



Chapter 44 | Notes - Notes

44. Notes - Notes

44.1 General description

The [Notes] table stores notes entered by various applications, such as payroll component group notes and job title detailed description.

44.2 Notes field details

Division - Division

The [Notes.Division] field stores the division code of the user's division. The [Notes.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used yet. It is added for future functionality.

Guid - Guid

The [Notes.Guid] field stores the Guid ID generated by the system upon creation of the note.

ID - ID

The [Notes.ID] field stores the system generated database record identification number. This field is not functionally used.

Note - Note

The [Notes.Note] field stores the note.

Timestamp - Timestamp

The [Notes.Timestamp] field stores a system generated timestamp. The timestamp field is regenerated upon every change in the [Notes] record. This field is mainly used for replication purposes.



Chapter 45 | DeletionLogs - Deletion Logs

45. DeletionLogs - Deletion Logs

45.1 General description

The [DeletionLogs] table is used to overcome issues during XML data exchange. Now, this table is only implemented for payroll data XML exchange, but could be expanded to other modules.

In the source database, when user deletes a record, the key values of the deleted record will be saved into the [DeletionLogs] table. Then, during XML data exchange, the records in the [DeletionLogs] table will be included in the XML file so that the matching record(s) in the target database will be removed.

45.2 DeletionLogs field details

CompanyCode - Company

The [DeletionLogs.CompanyCode] field stores the division code to which the record is linked. The [DeletionLogs.CompanyCode] field refers to the [Bedryf.Bednr] field.

Division - Division

The [DeletionLogs.Division] field stores the division code of the current logon. The [DeletionLogs.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used yet. It is added for future functionality.

ID - ID

The [DeletionLogs.ID] field stores the system generated database record identification number. This field is not functionally used.

KeyDate1 - Key date field 1

The [DeletionLogs.KeyDate1] field is used to store the key value of date field.

KeyDate2 - Key date field 2

The [DeletionLogs.KeyDate2] field is used to store the key value of date field.

KeyDate3 - Key date field 3

The [DeletionLogs.KeyDate3] field is used to store the key value of date field.

KeyGuid1 - Key Guid field 1

The [DeletionLogs.KeyGuid1] field is used to store the key value of Guid field.

KeyGuid2 - Key Guid field 2

The [DeletionLogs.KeyGuid2] field is used to store the key value of Guid field.

KeyGuid3 - Key Guid field 3

The [DeletionLogs.KeyGuid3] field is used to store the key value of Guid field.

KeyInt1 - Key integer field 1

The [DeletionLogs.KeyInt1] field is used to store the key value of integer field.

KeyInt2 - Key integer field 2

The [DeletionLogs.KeyInt2] field is used to store the key value of integer field.

KeyInt3 - Key integer field 3

The [DeletionLogs.KeyInt3] field is used to store the key value of integer field.

KeyInt4 - Key integer field 4

The [DeletionLogs.KeyInt4] field is used to store the key value of integer field.

KeyInt5 - Key integer field 5

The [DeletionLogs.KeyInt5] field is used to store the key value of integer field.

KeyString1 - Key string field 1

The [DeletionLogs.KeyString1] field is used to store the key value of string field.

KeyString2 - Key string field 2

The [DeletionLogs.KeyString2] field is used to store the key value of string field.

KeyString3 - Key string field 3

The [DeletionLogs.KeyString3] field is used to store the key value of string field.

KeyString4 - Key string field 4

The [DeletionLogs.KeyString4] field is used to store the key value of string field.

KeyString5 - Key string field 5

The [DeletionLogs.KeyString5] field is used to store the key value of string field.

SysCreated - Created date and time

The [DeletionLogs.SysCreated] field stores the date and time that the record has been created.

SysCreator - Creator

The [DeletionLogs.SysCreator] field stores the ID of the resource who created the record. The [DeletionLogs.SysCreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [DeletionLogs.SysGuid] field stores the Guid that is generated by the system upon the creation of the record.

TableName - Table name

The [DeletionLogs.TableName] field stores the table name of the source table in which the key values belong.

Timestamp - Timestamp

The [DeletionLogs.Timestamp] field stores the system generated timestamp. The timestamp field is regenerated upon every change in the record. This field is mainly used for replication purposes.



Chapter 46 | HrComponents - Components

46. HrComponents - Components

46.1 General description

The payroll calculation consists of several parts. In the International Payroll module, all parts of the payroll calculation are defined as components. So for example, all premiums, taxes, overtime will be defined as components. Several components will be supplied by Exact Software (for example the components of which the calculation is defined by law).

The [HrComponents] table is the central table for all components. This includes the following entities:

- Manually created payroll components
- Predefined payroll components (premiums etc.)
- Hour matrix components
- Cost price components
- Commission method components

46.2 HrComponents field details

Account - Account

The [HrComponents.Account] field stores the unique Guid of the account that is linked to the component. This field is only enabled for Tax components, Deduction components and Bank account components (so only components that are part of the net salary that must be paid to third parties). The [HrComponents.Account] field refers to the [Cicmpy.Cmp_wnn] field.

Age - Age

The [HrComponents.Age] field stores the age if applicable in a wage scale.

Note! The [HrComponents.Age] field is only used in wage scales.

BankAccount - Bank account

The [HrComponents.BankAccount] field stores the bank account that is linked to the component. This field is only filled if the account field (the [HrComponents.Account] field) is also filled and is only available for Tax components and Deduction components (so components where [HrComponents.Type] has the value "D" or "T"). The [HrComponents.BankAccount] field is used to create an outstanding item that will be directly paid to the specific bank account. The [HrComponents.BankAccount] field refers to the [Bnkacc.Banknr] field and the [Bnkkop.Bank_rek] field.

Blocked - Blocked

The [HrComponents.Blocked] field indicates if the component is blocked. The value "1" indicates that the component is blocked; the value "0" indicates the component is not blocked. If the component is blocked, it cannot be linked to a resource or used in a payroll calculation.

Note! Payroll calculations that are already generated (and authorized) and include an item that has been marked "Blocked" afterwards, can still be processed. If such a payroll calculation is recalculated after that (so still including a blocked component), then this component will not be included in the recalculation.

Comp_Code - Component

The [HrComponents.Comp_Code] field stores the code of the component. Although the code identifies a certain component, it is possible to have 2 or more components with the same code, for example when the first component has ended and a new one has started. The start date of the second component with the same code has to lie after the end date of the first component.

Comp_Status - Component status

The [HrComponents.Comp_Status] field indicates if the component is complete or not. If not all required data is available for a component, the component will have the status "Incomplete". Only components with the status "Complete" can be used. The [HrComponents.Comp_Status] field refers to the DDTests table which contains the following values for this field:

Value	Description
C	Complete
I	Incomplete

Note! Components with status "Complete" are often divided into alternative statuses "Active", "Future" and "Inactive" depending on the start and end dates of the component (compared to the current date).

Comp_Sub_Type - Component sub type

The [HrComponents.Comp_Sub_Type] field indicates the subtype of the component. It is a further classification of the type as defined in the [HrComponents.Comp_Type] field. The [HrComponents.Comp_Sub_Type] field determines how the component will be calculated and how it behaves on official reports. The values used in this field are country dependent. For more information see the Country specific section(s).

Comp_Type - Component type

The [HrComponents.Comp_Type] field indicates the type of the component. This field is used for general validations and selections on reports. The type of component is dependent on the relation this component is meant for.

The [HrComponents.Comp_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description	Remark
B	Bank accounts	If the component is used for payment of the net salary (employer <-> employee relation).
C	Cost price	Used to add additional amounts when the salary has to be invoiced (Parent <- -> Children relation).
D	Deduction	If there is an (employer and/or employee) <-> third party (e.g. pension organization) relation.
F	Financial components	If there is an employer <-> employee relation. The [HrComponents.Comp_Sub_Type] field further specifies what kind of financial component this is.
H	Hour	Used to store the logic for the hour matrix. The parent stores the description and the method used. In the children, the start and end time is stored.
I	In between calculation	If the component is only used for "in between" calculations. Nothing is done with the result. Only used in German and Austrian legislation for special hourly wage calculations. This type cannot be entered via the maintenance of components.
L	General ledger link	Used to store other general ledgers on cost center level. These components are stored as children (of type "L") for the component involved.

Value	Description	Remark
M	More then one component	If components are entered together. Only used in German and Austrian legislation (Krankenkasse / Umlage) or for the children components of wage scales. This type cannot be entered via the maintenance of components.
P	Commission method	This component is not used in the payroll calculation, but to link a method for commission calculation to a resource. Only used in e-Synergy.
R	Reservation	If the employer saves an amount that will be paid later to the employee.
T	Tax	If there is an (employer and/or employee) <--> government relation.
Y	Cost allocation	Used to store the component used for cost allocation. Per country administration, only one of these types can exist.

Comp_Visible - Component is visible

The [HrComponents.Comp_Visible] field indicates if the component can be linked by the user or that it is automatically generated during the calculation. Depending on the employee payroll settings the component can be calculated differently. Components that are automatically generated are amongst others tax components and premiums. The value of the [HrComponents.Comp_Visible] field is not defined by the user. It is the result of the [HrComponents.Comp_Type], the [HrComponents.Comp_Sub_Type] and the [HrComponents.Paid_By] fields. The [HrComponents.Comp_Visible] field refers to the DDTests table which contains the following values for this field:

Value	Description
A	Always
N	Advanced
V	Never

Note! At the moment, the value "N" is not used.

CompanyCode - Company Code

The [HrComponents.CompanyCode] field stores the company code in multi-division handling.

Country - Country

The [HrComponents.Country] field stores the code of the country to which the component applies. Only components with a country code that is equal to the country code of the resource (the [Humres.Land_ISO] field) can be used for that resource. The [HrComponents.Country] field refers to the [Land.LandCode] field.

Country_char1 - Country specific character field 1

The [HrComponents.Country_char1] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char2 - Country specific character field 2

The [HrComponents.Country_char2] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char3 - Country specific character field 3

The [HrComponents.Country_char3] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char4 - Country specific character field 4

The [HrComponents.Country_char4] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char5 - Country specific character field 5

The [HrComponents.Country_char5] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char6 - Country specific character field 6

The [HrComponents.Country_char6] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char7 - Country specific character field 7

The [HrComponents.Country_char7] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char8 - Country specific character field 8

The [HrComponents.Country_char8] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char9 - Country specific character field 9

The [HrComponents.Country_char9] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float1 - Country specific number field

The [HrComponents.Country_float1] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s) of the [HrComponents] table.

Country_float2 - Country specific number field

The [HrComponents.Country_float2] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float3 - Country specific number field

The [HrComponents.Country_float3] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float4 - Country specific number field

The [HrComponents.Country_float4] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float5 - Country specific number field

The [HrComponents.Country_float5] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float6 - Country specific number field

The [HrComponents.Country_float6] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float7 - Country specific number field

The [HrComponents.Country_float7] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float8 - Country specific number field

The [HrComponents.Country_float8] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float9 - Country specific number field

The [HrComponents.Country_float9] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float10 - Country specific number field

The [HrComponents.Country_float10] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float11 - Country specific number field

The [HrComponents.Country_float11] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float12 - Country specific number field

The [HrComponents.Country_float12] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_Guid1 - Country specific Guid field 1

The [HrComponents.Country_Guid1] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_Guid2 - Country specific Guid field 2

The [HrComponents.Country_Guid2] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny1 - Country specific no / yes field 1

The [HrComponents.Country_ny1] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny2 - Country specific no / yes field 2

The [HrComponents.Country_ny2] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny3 - Country specific no / yes field 3

The [HrComponents.Country_ny3] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny4 - Country specific no / yes field 4

The [HrComponents.Country_ny4] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny5 - Country specific no / yes field 5

The [HrComponents.Country_ny5] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny6 - Country specific no / yes field 6

The [HrComponents.Country_ny6] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny7 - Country specific no / yes field 7

The [HrComponents.Country_ny7] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny8 - Country specific no / yes field 8

The [HrComponents.Country_ny8] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny9 - Country specific no / yes field 9

The [HrComponents.Country_ny9] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny10 - Country specific no / yes field 10

The [HrComponents.Country_ny10] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny11 - Country specific no / yes field 11

The [HrComponents.Country_ny11] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny12 - Country specific no / yes field 12

The [HrComponents.Country_nu12] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny13 - Country specific no / yes field 13

The [HrComponents.Country_ny13] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny14 - Country specific no / yes field 14

The [HrComponents.Country_ny14] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny15 - Country specific no / yes field 15

The [HrComponents.Country_ny15] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny16 - Country specific no / yes field 16

The [HrComponents.Country_ny16] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny17 - Country specific no / yes field 17

The [HrComponents.Country_ny17] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_ny18 - Country specific no / yes field 18

The [HrComponents.Country_ny18] field is used to define country specific details for a component. Per country a different meaning applies to this field. For more information see the Country specific section(s).

Country_string1 - Country specific text field

The [HrComponents.Country_string1] field is used to define country specific details for a component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Creditor - Sequence number

The [HrComponents.Creditor] field stores the successor number of a wage scale component. This field is only used in a parent - children relation (where the child component has the value "M" for the field [HrComponents.Comp_Type] and the component code of the parent in the [HrComponents.Parent_Code] field). The first scale has the value "0", successors of that wage scale increment every time with +1.

Creditor_Account - Creditor general ledger account number

The [HrComponents.Creditor_Account] field stores the general ledger account number on which the outstanding items will be created. This field is only used for specific component types, like tax, social premiums and salary savings. The [HrComp_Trans.Amount_To_Be_Paid] field will use the value in the [HrComponents.Creditor_Account] to process the amount. The [HrComponents.Creditor_Account] field refers to the [Grtbk.Reknr] field.

Note! The type of the general ledger account number should be "suspense account".

Creditor_CostCenter - Cost center

The [HrComponents.Creditor_CostCenter] field is not used.

Creditor_CostUnit - Cost unit

The [HrComponents.Creditor_CostUnit] field is not used.

Currency - Currency

The [HrComponents.Currency] field stores the currency of the component. The default value depends on the legislation and cannot be changed by the user. The [HrComponents.Currency] field refers to the [Valuta.ValCode] field.

Note! The [HrComponents.Currency] field is used to fill the [Amutas.ValCode] field during the financial processing.

Default_Amount - Default amount

The [HrComponents.Default_Amount] field stores the amount that will be default suggested when the component is linked to a resource. This field is only filled if the component is handled as an amount (so the [HrComponents.Unit] field has the value "A").

Default_Percentage - Default percentage

The [HrComponents.Default_Percentage] field stores the percentage that will be default suggested when the component is linked to a resource. This field is only filled if the component is handled as a percentage (so the [HrComponents.Unit] field has the value "P").

DefaultHourlyWage - Default Hourly Wage

The [HrComponents.DefaultHourlyWage] field stores the hourly wage that will be default suggested when the component is linked to a resource. This field is only filled if the component is handled as a hourly wage (so the [HrComponents.Unit] field has the value "H"). This field is needed for the component that define the amounts on hourly basis. When link the component to resource, this field will copy to hrcomp_resource.hourlywage

Descr50_0 - Description

The [HrComponents.Descr50_0] field stores the description of the component.

Descr50_1 - Description 1

The [HrComponents.Descr50_1] field stores the description of the component in the second language. This field is only available if a second language is defined in the settings (in Exact Globe) and the user has selected this language in the user settings (in Exact Globe).

Descr50_2 - Description 2

The [HrComponents.Descr50_2] field stores the description of the component in the third language. This field is only available if a third language is defined in the settings (in Exact Globe) and the user has selected this language in the user settings (in Exact Globe).

Descr50_3 - Description 3

The [HrComponents.Descr50_3] field stores the description of the component in the fourth language. This field is only available if a fourth language is defined in the settings (in Exact Globe) and the user has selected this language in the user settings (in Exact Globe).

Descr50_4 - Description 4

The [HrComponents.Descr50_4] field stores the description of the component in the fifth language. This field is only available if a fifth language is defined in the settings (in Exact Globe) and the user has selected this language in the user settings (in Exact Globe).

Division - Division

The [HrComponents.Division] field stores the division code. The [HrComponents.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used at this moment. It is added for future functionality.

DocAttachmentID - Attachment ID

A user can add an attachment to a component. The attachment can contain additional information which is relevant to a specific component. The attachment can be any type of file, such as an Excel sheet, an image, or a Word document. Attachments are stored as documents in the [BacoDiscussions] table, which is the central document table. The system uses the attachment id field to store a unique reference to the document in the [BacoDiscussions] table. The [HrComponents.DocAttachmentID] field refers to the [BacoDiscussions.ID] field.

Edit_Resource_Level - Adjustable

The [HrComponents.Edit_Resource_Level] field indicates if the component can be adjusted at resource level. The value "1" indicates that the component can be adjusted at resource level; the value "0" indicates that the component cannot be adjusted at resource level.

EndDate - End date

The [HrComponents.EndDate] field stores the end date of the component. If the end date lies before the current date, the component is inactive. If there are components with the same code (the [HrComponents.Comp_Code] field), then the end date of the first component must lie before the start date of the second component.

FormulaField - Formula

The [HrComponents.FormulaField] field stores the formula of the component. Whether or not it is possible to define a formula for a component depends on the subtype of the component. The way a formula is stored is country specific. For more information see the Country specific section(s).

ID - ID

The [HrComponents.ID] field stores the system generated database record identification number. This field is not functionally used.

JobActivity - Job activity

The [HrComponents.JobActivity] field indicates which entities are used in a wage scale component. If applicable, this field stores the job group for the children of a wage scale component. The [HrComponents.JobActivity] field can contain one or a combination of the following values for wage scales. The value "N" is never part of a combination. Which value or combination of values is available is country dependent. For more information, see the Country specific details section(s):

Value	Description
A	Age
D	Years in service
G	Job group
N	Not applicable
L	Function (job) level
S	Scale

The [HrComponents.JobActivity] field is also used to store the color of the child components of the hour matrix (so the color of the components where [HrComponents.Comp_Type] = "M" and [HrComponents.Comp_Type] for the parent component equals "H").

Ledger_Account - General ledger account number

The [HrComponents.Ledger_Account] field stores the general ledger account number on which the costs and revenues will be booked. This field is available for reservations (so where [HrComponents.Comp_Type] = "R") and financial components (so where [HrComponents.Comp_Type] = "F").

It is also available for tax components (so where [HrComponents.Comp_Type] = "T") and deductions (so where [HrComponents.Comp_Type] = "D") when paid by the employer.

Ledger_CostCenter - General ledger cost center

The [HrComponents.Ledger_CostCenter] field stores the cost center for which a deviating general ledger account number is defined for the component. The [HrComponents.Ledger_CostCenter] field refers to the [Kstpl.KstplCode] field.

Note! This field is also used for different purposes in country specific functionality. For more information see Country specific section(s).

Ledger_CostUnit - General ledger cost unit

The [HrComponents.Ledger_CostUnit] field is not used.

LedgerType - General ledger account type

The [HrComponents.LedgerType] field indicates the type of the general ledger account number linked to the component (the [HrComponents.Ledger_Account] field). The [HrComponents.LedgerType] field refers to the DDTests table which contains the following values for this field:

Value	Description
A	Age
D	Years in service

Note! The [HrComponents.LedgerType] field is only used for reporting reasons.

LocalCode - Local code

The [HrComponents.LocalCode] field stores the city or community for which the component can be used. The field can be used to create components that will be used in one specific city or community, for example city dependent taxes or premiums. The [HrComponents.LocalCode] field is only used in USA legislation.

MainType - Payment term

The [HrComponents.MainType] field stores the payment frequency of the component. This field can contain the following values:

Value	Description	Remark
1	Monday	When used in hour schedules (HrComponents.Comp_Type = "H")
2	Tuesday	When used in hour schedules (HrComponents.Comp_Type = "H")
3	Wednesday	When used in hour schedules (HrComponents.Comp_Type = "H")
4	Thursday	When used in hour schedules (HrComponents.Comp_Type = "H")
5	Friday	When used in hour schedules (HrComponents.Comp_Type = "H")
6	Saturday	When used in hour schedules (HrComponents.Comp_Type = "H")
7	Sunday	When used in hour schedules (HrComponents.Comp_Type = "H")
8	Public holiday	When used in hour schedules (HrComponents.Comp_Type = "H")
D	The payment is set on payment date of the entry	When used in tax or deduction components (HrComponents.Comp_Type = "D" or "T") where a ledger of type creditor account is linked
M	The payment is set on the last day of the month	When used in tax or deduction components (HrComponents.Comp_Type = "D" or "T") where a ledger of type creditor account is linked
Q	The payment is set on the last day of the quarter	When used in tax or deduction components (HrComponents.Comp_Type = "D" or "T") where a ledger of type creditor account is linked
Y	The payment is set on the last day of the year	When used in tax or deduction components (HrComponents.Comp_Type = "D" or "T") where a ledger of type creditor account is linked

Notes - Notes

The user can add a note to a component. Notes are stored as documents in the [BacoDiscussions] table, which is the central document table of Exact Globe and e-Synergy. The system uses the [HrComponents.Notes] field to store a unique reference to the document in the [BacoDiscussions] table. The [HrComponents.Notes] field refers to the [BacoDiscussions.ID] field.

Origin - Origin

The [HrComponents.Origin] field stores the origin of numbers or days of the component. This field can be filled for components of type Financial (so where [HrComponents.Comp_Type] = "F"). Whether or not the different values can be selected differ per legislation. For more information see the Country specific section(s). The [HrComponents.Origin] field refers to the DDTests table which contains the following values for this field:

Value	Description
A	Actual
C	Contract
N	N/A
T	Time
X	Commission invoice

OriginalCode - Original code

The [HrComponents.OriginalCode] field stores the budget version linked to a commission component. The [HrComponents.OriginalCode] field is also used for components that are delivered for a collective agreement to have the original collective agreement code stored for the components so it can not be lost after recoding of components.

Paid_By - Paid by

The [HrComponents.Paid_By] field indicates who will pay the component. The [HrComponents.Paid_By] field refers to the DDTests table which contains the following values for this field:

Value	Description
E	Employee
R	Employer

Example: when a gross component is paid by the employee, the amount entered at the component will be handled as a negative amount in the gross-nett calculation as shown on the payroll slip. Paid by employer will lead to a positive amount.

Parent_Code - Parent

The [HrComponents.Parent_Code] field stores the code of a component to which the component is linked as child component. For more information, see sections 'Country specific field details - Netherlands' and 'Commission method components'. The [HrComponents.Parent_Code] field refers to the [HrComponents.Comp_Code] field.

Payment_Period - Payment period

The [HrComponents.Payment_Period] field stores the payment period of the component. The payment period determines how often a component will be used in a calculation. The [HrComponents.Payment_Period] field refers to the DDTests table which contains the following values for this field:

Value	Description
A	Half-yearly
B	Bi-weekly
D	Daily
H	Hourly
M	Monthly
O	Once-only
P	Periodically
Q	Quarterly
S	Semi monthly
V	4-weekly
W	Weekly
Y	Yearly

Note! A component with payment period "P" will be handled as having the same payment period as can be found in the payroll settings for the employee the component is linked to (the [HrPayroll.Payment_Period] field). This removes the need to create a separate component for every payment period that is used.

Payroll - Link automatically

The [HrComponents.Payroll] field indicates if the component will be linked automatically to a new resource. This field is also used to indicate if a component is a payroll component and if the component is supplied by Exact (via the premium wizard). The [HrComponents.Payroll] field can contain the following values:

Value	Description
0	No payroll (e.g. commission components)
1	Payroll
2	Delivered by Exact via premium wizard
3	Payroll + Delivered by Exact via premium wizard
4	Link automatically
5	Payroll + Link automatically
6	Delivered by Exact via premium wizard + Link automatically
7	Payroll + Delivered by Exact via premium wizard + Link automatically

Priority - Priority

The [HrComponents.Priority] field indicates the priority level of the payroll component.

Scale - Scale

The [HrComponents.Scale] field stores the life cycle of a job level in a wage scale. This field is meant to store the job levels within a wage scale.

The [HrComponents.Scale] field can contain the following values:

Value	Description
A	Half yearly
B	Two yearly
N	N/A
P	Periodically
Y	Yearly

StartDate - Start date

The [HrComponents.StartDate] field stores the start date of the component. If 2 or more components with the same code exist, then the start date of the second component with the same code has to lie after the end date (the [HrComponents.EndDate] field) of the first component.

StateCode - State code

The [HrComponents.StateCode] field stores the code of the state of the component. The field can be used to create components that will be used in one specific state, for example state dependent taxes or premiums. The [HrComponents.StateCode] field is only used in German and USA legislation.

Syscreated - Syscreated

The [HrComponents.Syscreated] field stores the date and time when a component was created. The system populates this field for all components.

Syscreator - Syscreator

The [HrComponents.Syscreator] field stores the creator of a component. The system populates this field for all components. The [HrComponents.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [HrComponents.SysGuid] field stores a unique identifier and is used for technical reasons only. It has no functional meaning. The system populates this field for all components.

Sysmodified - Sysmodified

The [HrComponents.Sysmodified] field stores the date and time when a component was last modified. Initially, this field contains the creation date. When a user modifies a component, the date and time stored in the [HrComponents.Sysmodified] field are changed to the date and time of modification. The system populates this field for all components.

Sysmodifier - Sysmodifier

The [HrComponents.Sysmodifier] field stores the ID of the person who modified a component. Initially, this field contains the creator ID. When a user modifies a component, the modifier ID stored in the [HrComponents.Sysmodifier] field is changed to the ID of the user who modified the component. The system populates this field for all components. The [HrComponents.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrComponents.Timestamp] field is a technical field, which the SQL server triggers. The timestamp sorts the components in created or changed order. The system assigns a new timestamp for each new component and updates the timestamp of the changed components. The system uses the timestamp for replication. The replication process uses only the components that have the latest timestamp, which means that the target system receives only the new or updated components.

Unit - Unit

The [HrComponents.Unit] field indicates if the component is handled as an amount or a percentage. If the component is handled as a percentage, the [HrComponents.Default_Percentage] field can be filled; if the component is handled as an amount, the [HrComponents.Default_Amount] field can be filled. The [HrComponents.Unit] field refers to the DDTests table which contains the following values for this field:

Value	Description
A	Amount
P	Percentage

46.3 Country specific field details - Netherlands (NL)

Country_char1 - Country specific character field 1

The [HrComponents.Country_char1] field stores the type of entry a component should be used in. The available values are dependent on the (sub)type of the component. The following values can be used:

Value	Description
B	Both
R	Regular
S	Special

Country_char2 - Country specific character field 2

The [HrComponents.Country_char2] field stores the type of franchise / maximum wage for the component. By default, this field will contain the value "J". The value "D" is only allowed for gross premiums with a percentage (the [HrComponents.Comp_Type] field = "D" and the [HrComponents.Comp_Sub_Type] field = "2100" or "2101").

The value of this field determines whether the values filled in the [HrComponents.Country_float1] and [HrComponents.Country_float2] fields are amounts per day or per year.

Value	Description
D	Day
J	Year
U	Day/Hour franchise

Country_char3 - Country specific character field 3

The [HrComponents.Country_char3] field stores the method of payment of the holiday / 13th month reservation when an employee is out of service. By default this field will contain the value "L".

Value	Description
L	Payment in last period of employment.
M	Payment in first period after ending employment.
N	No payment.
O	Niet uitbetalen (wel in uitbetalingsperiode).
P	Niet uitbetalen (wel indien gelijk aan einddatum uitbetalingsperiode).

Country_char4 - Country specific character field 4

The [HrComponents.Country_char4] field indicates if the component is calculated cumulative per year or per period. This field is only available for the following subtypes:

- Bruto premie werknemer percentage over bruto loon ([HrComponents.Comp_Sub_Type] = "2100")
- Bruto premie werkgever percentage over bruto loon ([HrComponents.Comp_Sub_Type] = "2101")
- Bruto premie werknemer percentage over BTER-loon ([HrComponents.Comp_Sub_Type] = "2200")
- Bruto premie werkgever percentage over BTER-loon ([HrComponents.Comp_Sub_Type] = "2201")
- Bruto premie werknemer percentage over SV-loon ([HrComponents.Comp_Sub_Type] = "2400")
- Bruto premie werkgever percentage over SV-loon ([HrComponents.Comp_Sub_Type] = "2401")
- Netto premie werknemer percentage over bruto loon ([HrComponents.Comp_Sub_Type] = "2900")
- Netto premie werkgever percentage over bruto loon ([HrComponents.Comp_Sub_Type] = "2901")
- Netto premie werknemer percentage over BTER-loon ([HrComponents.Comp_Sub_Type] = "2910")
- Netto premie werkgever percentage over BTER-loon ([HrComponents.Comp_Sub_Type] = "2911")
- Netto premie werknemer percentage over SV-loon ([HrComponents.Comp_Sub_Type] = "2920")
- Netto premie werkgever percentage over SV-loon ([HrComponents.Comp_Sub_Type] = "2921")

Value	Description
P	Period
Y	Year

Country_char5 - Country specific character field 5

The [HrComponents.Country_char5] field stores the type of minimum age calculation for a deduction. For the deduction calculation, this can be the age at the start of the payroll year or at the start of the period. The value of the field [HrComponents.Country_float4] will be used as the minimum age.

If the [HrComponents.Country_char5] field has the value "P", then the deduction will only be calculated for employees who have the age stored in the [HrComponents.Country_float4] field in the period or are older. If the employee is younger, nothing is calculated.

Value	Description
P	Period
Y	Year

Country_char6 - Country specific character field 6

The [HrComponents.Country_char6] field stores the type of maximum age calculation for a deduction. For the deduction calculation, this can be the age at the start of the payroll year or at the start of the period. The value of the field [HrComponents.Country_float5] will be used as the maximum age.

If the [HrComponents.Country_char5] field has the value "P", then the deduction will only be calculated for employees who have the age stored in the [HrComponents.Country_float5] field in the period or are younger. If the employee is older, nothing is calculated.

Value	Description
P	Period
Y	Year

Country_char7 - Country specific character field 7

The [HrComponents.Country_char7] field indicates if a specific "vakantiefonds" calculation has to be included in the payroll calculation. This field is only used for components of type "vakantiebon" (so components where [HrComponents.Comp_Type] = "F" and [HrComponents.Comp_Sub_Type] = "1300", "1301" or "1302").

The values in the [HrComponents.Country_char7] field refer to a specific sub sector agreement.

Value	Description
N	Not used
1	SFB: CAO Bouw
2	SFS: CAO Stukadoors
3	SFB: CAO Natuursteen
6	SFS: CAO Schilders
9	SFB: CAO Timmerfabrieken

Country_float1 - Country specific number field 1

The [HrComponents.Country_float1] field stores the franchise for the component. The amount of the franchise (= the amount over which the component is not to be calculated) can be entered as an amount per year or per day, dependent on the value of the [HrComponents.Country_char2] field. A value is only allowed for gross premiums with a percentage (so components where [HrComponents.Comp_Type] = "D" and [HrComponents.Comp_Sub_Type] = "2100" or "2101").

Note! The [HrComponents.Country_float1] field can also store the non taxable amount for components with subtype "1800" or "1810" (so where [HrComponents.Comp_Sub_Type] has value "1800" or "1810").

Country_float2 - Country specific number field 2

The [HrComponents.Country_float2] field stores the maximum wage for the component. The amount of the maximum wage (= above this wage, the component is not to be calculated) can be entered as an amount per year or per day, dependent on the value of the [HrComponents.Country_char2] field. If the value of the [HrComponents.Country_float2] field is not equal to "0", then this amount must be bigger than the value of the [HrComponents.Country_float1] field.

A value is only allowed for gross premiums with a percentage (so components where [HrComponents.Comp_Type] = "D" and [HrComponents.Comp_Sub_Type] = "2100" or "2101").

Country_float3 - Country specific number field 3

The [HrComponents.Country_float3] field stores in which period a reservation will be paid. A value is only allowed for reservations (so components where [HrComponents.Comp_Sub_Type] = "1900", "1910", "1920" or "1930"). When such a component is linked to an employee and this field is filled in the component, it will automatically be paid in the period entered.

Country_float4 - Country specific number field 4

The [HrComponents.Country_float4] field stores the minimum age of a resource for a component. The age can be entered as the age at the start of the year or the start of the period, depending on the value of the [HrComponents.Country_char5] field. For more information, see the [HrComponents.Country_char5] field.

Country_float5 - Country specific number field 5

The [HrComponents.Country_float5] field stores the maximum age of a resource for the component. The age can be entered as the age at the start of the year or the start of the period, depending on the value of the [HrComponents.Country_char6] field. For more information, see the [HrComponents.Country_char6] field.

Country_float9 - Country specific number field 9

The [HrComponents.Country_float9] field stores the number of hours per day for the component.

Country_ny2 - Country specific no / yes field 2

The [HrComponents.Country_ny2] field indicates whether the component is to be included in the BTER wage (E-Bouwloon module). The BTER wage is used as a basic value for calculating various premiums that are specific for building construction companies. The value "1" indicates that the component will be included in the BTER wage; the value "0" indicates that the component will not be included in the BTER wage. The [HrComponents.Country_ny2] field is only available for components with subtype "1000", "1010", "1020", "1030", "1310", "1400", "1500", "1900", "1901", "1920", "1921", "1950" and "1960".

Country_ny4 - Country specific no / yes field 4

The [HrComponents.Country_ny4] field indicates whether the number of hours entered for the component is used in the calculation of some tax rebates (for component subtypes "3100", "3110" and "3120"). This field is only used for components of subtype "1850" (gross hour) and "1860" (net hour).

Regardless of the value of this field, the (calculated) amount for the hour type will always be taken into account when calculating the tax rebates. This calculation also needs a number of hours worked this period and this field determines whether the hours entered at the base salary should be raised / lowered with the number of hours entered for this hour type.

The value "1" indicates that the number of hours entered for this component will be used for the calculation of the tax rebates; the value "0" indicates that the number of hours entered for this component will not be used for the calculation of the tax rebates. Example: when the employee has worked 144 regular hours (base salary) this period and this hour type was added with 12 hours, the tax rebates will be calculated using 156 hours.

FormulaField - Formula field

The [HrComponents.FormulaField] is used to determine which components should be taken into account for calculating the base value for this component.

A value in this field is only allowed for reservations and deductions in terms of percentage (so components with subtype ([HrComponents.Comp_Sub_Type]) "1900", "1910", "2100", "2101", "2900" and "2901").

This field can contain two things:

- component subtypes ([HrComponents.Comp_Sub_Type] and/or
- component codes ([HrComponents.Comp_Code]).

When all components of a certain subtype are selected, only the subtype is saved. When not all components of a certain subtype are selected, the component codes are saved.

Notation is as follows: first all subtypes (the [HrComponents.Comp_Sub_Type] field) separated by a comma, then a semi-colon (;), then all components (the [HrComponents.Comp_Code] field) separated by a comma. The semi-colon is always saved, except when nothing is selected.

When this field is left empty for the six sub types mentioned above, the component will be calculated using only the base salary as a basic value (so components where the [HrComponents.Comp_Sub_Type] field = "1000" or "1010").

Example: "1000,1950;BRUTO,VAKGELD" means that the base value for this component will be calculated from all components of sub type "1000" and subtype "1950" and of components "BRUTO" and "VAKGELD".

JobActivity - Job activity

The [HrComponents.JobActivity] field indicates which entities are used in a wage scale component. If applicable, this field stores the job group for the children of a wage scale component. The [HrComponents.JobActivity] field can contain the following values for wage scales:

Value	Description
A	Age
AL	Age - Function level
G	Job group
GA	Job group - Age
GAL	Job group - Age - Function level
GL	Job group - Function level
N	Not applicable
L	Function level
S	Scale
SA	Scale - Age
SAL	Scale - Age - Function level
SL	Scale - Function level

Ledger_CostCenter - Cost center for deviating general ledger account number

The [HrComponents.Ledger_CostCenter] field stores the cost center of the component in case a deviating general ledger account number or a deviating percentage for the "WA" / "WAO" premiums per cost center is defined.

- To store deviating percentages per cost center for the WA / WAO premium: a child component record is created for the original WA / WAO component. The [HrComponents.Comp_Code] field will be the same but will be preceded with "#" and a sequence number. The [HrComponents.Parent_Code] is filled with the [HrComponents.Comp_Code] of the original WA / WAO premium. The [HrComponents.Comp_Type] has value "M" for the child component.
- To store deviating general ledger account numbers per cost center: the [HrComponents.Comp_Code] field will be the same as the original component code, but will be preceded with "*". The [HrComponents.Comp_Type] field has value "L".

Origin - Origin

The [HrComponents.Origin] field stores the origin of numbers or days of the component. This field can be filled for components of type Financial (so where [HrComponents.Comp_Type] = "F") where one of the following conditions also applies:

- The subtype of the component is "Salary", "Salary net" or "Wage illness" (so where [HrComponents.Comp_Sub_Type] is value "1000", "1010" or "1015").
- The payment period is set to "Daily" or "Hourly" (so where [HrComponents.Payment_Period] is value "D" or "H").
- The payment period is set to "Once only" and the subtype is "Gross deduction" or "Nett-Gross calculation" (so where [HrComponents.Payment_Period] is value "O" and [HrComponents.Comp_Sub_Type] is value "1020" or "1030").

The [HrComponents.Origin] field refers to the DDTests table which contains the following values for this field:

Value	Description	Remark
A	Actual	The number of days (HrComp_Trans.Number_Days_Period) and hours (HrComp_Trans.Number) are retrieved from the actual hour records of the employee. Items of type "Labor hours" can be selected in the "Activity" tab of the component.
C	Contract	The number of days (HrComp_Trans.Number_Days_Period) and hours (HrComp_Trans.Number) are retrieved from the MRS records of the employee. Items of type "Labor hours" can be selected in the "Activity" tab of the component.
N	N/A	N/A
T	Time	Only available for components of type "Gross hour compensation" (HrComponents.Comp_Sub_Type = "1850") and type "Gross hour deduction" (HrComponents.Comp_Sub_Type = "1860"). If Time is selected as source, only 1 item of the type "Labor hour" can be linked in the "Activity" tab of the component.
X	Commission invoice	Only available for financial components (so where [HrComponents.Comp_Type] = "F") where the payment frequency is set to "Once only" (so where [HrComponents.Payment_Period] = "O"). If Commission invoice is selected as source, only items of the type "Phantom" can be linked in the "Activity" tab of the component. In this case, records are created in table [HrComp_Resource] from E-Invoice to pay commissions.

Parent_Code - Parent

The [HrComponents.Parent_Code] field is used to link a component of type reservation to a component. When a reservation component is linked to this component, this component cannot be linked to an employee anymore. In the parent component, it is possible to enter a period in which the reservation is to be paid. In that period, the current component will automatically be used to pay the reservation. A value is obligatory for components with subtype "1950", "1960", "1970" and "1980". For all other (financial) components, this field must be empty.

A component with subtype X can only have a component with subtype Y linked:

Component X	Component Y
1950	1900
1960	1910
1970	1920
1980	1930

46.4 Country specific field details - China (CN)

Country_char1 - Prorate basis / hourly wage

The [HrComponents.Country_char1] field stores the denominator for prorate calculation. The [HrComponents.Country_char1] field is available for components with subtype "1000", "1100", "1200", "1300", "1350", "1400" and "1500" at the [HrComponents.Comp_sub_type] field. The component's subtype has the following descriptions:

The [HrComponents.Country_char1] field can have one of the following values:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime (Daily)
1300	Fixed allowance
1350	Variable allowance
1400	Gross deduction
1500	Net allowance

The [HrComponents.Country_char1] field can have one of the following values:

Value	Description	Remark
F	Fixed days	Denominator fixed for a component
W	Working days	Total working days for the period
C	Calendar days	Total days of the period

Note! The [HrComponents.Country_char1] field is only filled based on the value in the [HrComponents.Country_ny1] field that stores the prorate component. If the prorate component indicate any of the payment frequencies except for daily, once only and hourly, the [HrComponents.Country_char1] field will be filled.

Country_char2 - Tax method

The [HrComponents.Country_char2] field stores the type of tax method. The [HrComponents.Country_char2] field is available based on the following conditions:

- Only for components with subtype "1100", "1300" and "1350" at the [HrComponents.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1300	Fixed allowance
1350	Variable allowance

- Only if the [HrComponents.Country_ny1] field indicate that the prorate component is based on the payment frequencies of once-only, monthly, quarterly, half- yearly and yearly.

The [HrComponents.Country_char2] field can have one of the following values:

Value	Description	Remark
N	Normal	The tax amount is paid over every month
A	Average	The tax amount is paid over a few periods
I	Independent	The tax amount is paid once in every quarter
O	Once- only	The tax amount is paid once-only in full

Note! The [HrComponents.Country_char2] field is available to store the normal tax method if the [HrComponents.Payment_period] field is defined as once-only, monthly, quarterly, half-yearly and yearly.

The [HrComponents.Country_char2] field is available to store the average tax method if the [HrComponents.Payment_period] field is defined as quarterly, half-yearly and yearly.

The [HrComponents.Country_char2] field is available to store the independent tax method if the [HrComponents.Payment_period] field is defined as once-only, monthly, quarterly, half-yearly and yearly.

The [HrComponents.Country_char2] field is available to store the once-only tax method if the [HrComponents.Payment_period] field is defined as once-only and yearly.

Tax Method	Payment Period
Normal	once-only, monthly, quarterly, half-yearly and yearly
Average	quarterly, half-yearly and yearly
Independent	once-only, monthly, quarterly, half-yearly and yearly
Once-only	once-only and yearly

Country_char3 - Rounding

The [HrComponents.Country_char3] field stores the types of rounding method used for final amount calculation. The [HrComponents.Country_char3] field is available for components with all subtypes except for subtype "4000" and "4100". The [HrComponents.Country_char3] field can have one of the following values:

Value	Description	Remark
N	None	No rounding
O	Normal	Normal rounding
U	Up	Rounding up
D	Down	Rounding down

Country_char4 - Precision

The [HrComponents.Country_char4] field stores the types of precision method used for calculation. The [HrComponents.Country_char4] field is available for components with all subtypes except for subtype "4000" and "4100". The [HrComponents.Country_char4] field can have one of the following values:

Value	Description	Remark
A	0.01	2 decimal
B	0.10	1 decimal
C	1.00	0 decimal

Note! The [HrComponents.Country_char4] field is only filled if the rounding method is not defined as none in the [HrComponents.Country_char3] field.

Country_float1 - Denominator

The [HrComponents.Country_float1] field stores the divisor used with the prorated amount. The [HrComponents.Country_float1] field is filled for components with subtype "1000", "1100", "1200", "1300", "1350", "1400", "1450" and "1500" at the [HrComponents.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime (Daily)
1300	Fixed allowance
1350	Variable allowance
1400	Gross deduction
1450	Net deduction
1500	Net allowance

Note! The [HrComponents.Country_float1] field is filled only if the [HrComponents.Country_char1] field indicate that the prorate basis is based on fixed days.

Country_float2 - Overtime rate

The [HrComponents.Country_float2] field stores the multiplier to calculate the overtime hourly wage for overtime component. This field enables the calculation of overtime pay based on the normal salary of resources that works overtime. The [HrComponents.Country_float2] field is only filled for component with subtype "1200", which is the overtime (daily) subtype.

Country_float3 - Fixed deduction / tax threshold

The [HrComponents.Country_float3] field is shared to store the fixed deduction value for social insurance calculation and tax threshold value for fixed tax calculation for local workers. The value stored in the [HrComponents.Country_float3] field is determined by the subtype of the component described as follows:

Stored Value	Component Subtype
Fixed deduction (social insurance calculation)	"2000", "2100", "2200", "2250", "2300", "2400", "2500"
Tax threshold (fixed tax calculation)	"3000"

The component's subtype has the following descriptions:

Subtype	Description
2000	Pension insurance
2100	Unemployment insurance
2200	Medical insurance
2250	Supplementary Insurance
2300	Maternity insurance
2400	Injury insurance
2500	Housing fund
3000	Tax

Country_float4 - Minimum base value / foreigner tax threshold

The [HrComponents.Country_float4] field is shared to store the minimum base value for social insurance calculation and foreigner tax threshold value for tax calculation for foreign workers. The value stored in the [HrComponents.Country_float4] field is determined based on the subtype of the component described as follows:

Stored Value	Component Subtype
Minimum base value	"2000", "2100", "2200", "2250", "2300", "2400", "2500"
Foreigner tax threshold	"3000"

The component's subtype has the following descriptions:

Subtype	Description
2000	Pension insurance
2100	Unemployment insurance
2200	Medical insurance
2250	Supplementary Insurance
2300	Maternity insurance
2400	Injury insurance
2500	Housing fund
3000	Tax

The [HrComponents.Country_float4] that stores minimum base value can have one of the following values that determine the calculation:

Value	Remarks
0	No minimum
Less than minimum value	No calculation
More than minimum value	Perform calculation

Country_float5 - Maximum base value

The [HrComponents.Country_float5] field stores the maximum based value of social insurance calculation. The [HrComponents.Country_float5] field is filled to stores the maximum base value for components with subtype "2000", "2100", "2200", "2250", "2300", "2400" and "2500" at the [HrComponents.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
2000	Pension insurance
2100	Unemployment insurance
2200	Medical insurance
2250	Supplementary Insurance
2300	Maternity insurance
2400	Injury insurance
2500	Housing fund

The [HrComponents.Country_float5] field can have one of the following values:

Value	Remarks
0	No limit
Less than maximum value	Take defined value as the base
More than maximum value	Take maximum value as the base

Country_float6 - Maximum contribution housing fund

The [HrComponents.Country_float5] field stores the maximum housing fund value contributed by the employee or employer. The [HrComponents.Country_float6] field is only filled for component with subtype "2500", which is the housing fund subtype.

Country_ny1 - Prorate component

The [HrComponents.Country_ny1] field stores the value that indicate whether or not to perform prorate calculation. The [HrComponents.Country_ny1] field can have one of the following values:

Value	Remarks
0	No - Do not perform prorate calculation
1	Yes - Perform prorate calculation

The [HrComponents.Country_ny1] field is filled for components with subtype "1000", "1100", "1200", "1300", "1350", "1400", "1450" and "1500" at the [HrComponents.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime (Daily)
1300	Fixed allowance
1350	Variable allowance
1400	Gross deduction
1450	Net deduction
1500	Net allowance

Note! The [HrComponents.Country_ny1] field is only filled if the prorate component is based on any of the frequencies except for daily, hourly and once-only. The [HrComponents.Country_ny1] field stores the "1" value if it is filled for component with subtype "1200". This enables the [HrComponent.Country_ny1] field to use the [HrComponents.Country_char1] field to calculate the component overtime hourly wages.

Country_string1 - Employer reference number

The [HrComponents.Country_string1] field stores the employer reference number when the company declares the deduction components such as tax, social insurance and housing fund. The [HrComp_trans.Country_string1] field is filled for components with subtype "2000", "2100", "2200", "2250", "2300", "2400" and "2500" at the [HrComponents.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
2000	Pension insurance
2100	Unemployment insurance
2200	Medical insurance
2250	Supplementary Insurance
2300	Maternity insurance
2400	Injury insurance
2500	Housing fund

46.5 Country specific field details - Malaysia (MY)**Country_char1** - Prorate basis / hourly wage

The [HrComponents.Country_char1] field stores the denominator for a prorate calculation. The [HrComponents.Country_char1] field is available for components with subtype "1000", "1100", "1200" and "1300" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime
1300	Fixed allowances

The [HrComponents.Country_char1] field can have one of the following values:

Value	Description	Remark
F	Fixed days	Denominator fixed for a component
W	Working days	Total working days for the period
C	Calendar days	Total days of the period

Note! The [HrComponents.Country_char1] field is enabled only if the [HrComponents.Country_ny1] field indicates that the prorate component is based on any of the payment frequencies except for daily, once-only and hourly for components with subtype "1000", "1100" and "1300".

Country_char2 - Prorate basis (Worked days)

The [HrComponents.Country_char2] field stores the total actual worked days of a resource. The prorate basis is based on the working days or the calendar days. The [HrComponents.Country_char2] field is available for components with subtype "1000", "1100", "1300" and only if the [HrComponents.Country_ny1] field indicates that the prorate component is based on any of the payment frequencies except for daily, once-only and hourly. The [HrComponents.Country_char2] field can have one of the following values:

Value	Remarks
W	Working days
C	Calendar

Country_float2 - Denominator

The [HrComponents.Country_float2] field stores the fixed days in a month for calculating the prorated salary (for newly joined or resigned employee). The [HrComponents.Country_float2] field is available for components with subtype "1000", "1100", "1200" and "1300" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime
1300	Fixed allowances

Note! The [HrComponents.Country_float2] field is enabled only if the [HrComponents.Country_char1] field indicates that the prorate basis is based on fixed days and must not be empty.

Country_float3 - Overtime rate

The [HrComponents.Country_float3] field stores the multiplier for the overtime hourly wage for an overtime component. This field stores the overtime rate when a resource works overtime. The [HrComponents.Country_float3] field is only available for component with subtype "1200".

Country_float4 - Print on EA form under code

The [HrComponents.Country_float4] field indicates at which category/code the remuneration amount will be displayed on the respective statutory reports (EA form). The [HrComponents.Country_float4] field is available for all the financial components with subtype "1000", "1100", "1200", "1300", and Non-monetary benefits (Benefit in Kind) component with subtype "2103".

Country_float5 - Print on CP21 form under code

The [HrComponents.Country_float5] field indicates at which category/ code the remuneration amount will be displayed on the respective statutory reports (CP21 form). The [HrComponents.Country_float5] field allows a company to declare to the Lembaga Hasil Dalam Negeri (LHDN) department when a resource is leaving the current country to work for another country.

Country_ny1 - Prorate component

The [HrComponents.Country_ny1] field stores a value that determines if the component is a prorate component in order to perform prorate calculation. This also determines whether to calculate the overtime hourly wages. The [HrComponents.Country_ny1] field is available for components with subtype "1000", "1100", "1200" and "1300" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime
1300	Fixed allowances

The [HrComponents.Country_ny1] field can have one of the following values:

Value	Remarks
0	No - Do not perform prorate calculation
1	Yes - Perform prorate calculation

Note! The [HrComponents.Country_ny1] field is only enabled if the prorate component is based on any of the frequencies except for daily, hourly and once only. The [HrComponents.Country_ny1] field stores the value "1" if it is filled for component with subtype "1200". This enables the [HrComponent.Country_ny1] field to use the [HrComponents.Country_char1] field to calculate the component overtime hourly wages.

Country_ny2 - EPF contribution

The [HrComponents.Country_ny2] field indicates if the payroll component has any Employee Provident Fund (EPF) contribution. The value "0" indicates it has no EPF contribution. The value "1" indicates it has an EPF contribution.

Country_ny3 - SOCSO contribution

The [HrComponents.Country_ny3] field indicates if the payroll component has any Social Security Organization (SOCSO) contribution. The value "0" indicates it has no SOCSO contribution. The value "1" indicates it has a SOCSO contribution.

Country_ny4 - Tax contribution

The [HrComponents.Country_ny4] field indicates if the payroll component has any tax contribution. The value "0" indicates it has no tax contribution. The value "1" indicates it has a tax contribution.

Country_string1 - Employer reference number

The [HrComponents.Country_string1] field stores the employer reference number when a company declares the deduction components such as EPF employer, SOCSO, tax employee, HRDF, Non-monetary benefits and CP38. The [HrComponents.Country_string1] field is available for components with subtype "2100", "2101", "2102", "2103", "2104", "2105", "3000" and "3100" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
2100	Employee provident fund (EPF)
2101	Social security organization (SOCSO)
2102	Human resource development fund (HRDF)
2103	Non-monetary benefits
2104	Amanah Saham Nasional
2105	Tabung Haji
3000	Monthly scheduler tax deduction (PCB)
3100	CP38 deduction

Note! The [HrComponents.Country_string1] field is enabled only if the components are paid by employer (indicated in the [HrComponents.Paid_by] field with value "R") for components with subtype "2100", "2101", "2102", "2103" and "3000". For components (paid by employer) with subtype "2100" and "2101", once the [HrComponents.Country_string1] field is filled, the value in this field will be copied into the same field of the other components (paid by employee) that has the same subtype. The [HrComponents.Country_string1] field is enabled only if the components are paid by employee (indicated in the [HrComponents.Paid_by] field with value "E") for components with subtype "2104", "2105", "3000" and "3100". For component with subtype "3000" and "3100", once any of the [HrComponents.Country_string1] field is filled, the value in this field will be copied into the same field of the other components with the same subtype range ("3000" and "3100").

46.6 Country specific field details - Middle East (AE)**Country_char1** - Prorate basis / hourly wage

The [HrComponents.Country_char1] field stores the denominator for a prorate calculation. The [HrComponents.Country_char1] field is available for components with subtype "1000", "1100", "1200", "1300", "1301", "1302", "1400" and "1950" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Unpaid Leave
1300	Earning/deduction affect pension
1301	Earning/deduction affect provident fund

Subtype	Description
1302	Earning/deduction affect pension and provident fund
1400	Net earning/deduction
1950	Indemnity benefits

The [HrComponents.Country_char1] field can have one of the following values:

Value	Description	Remark
F	Fixed days	Denominator fixed for a component
W	Working days	Total working days for the period
C	Calendar days	Total days of the period
U	User Defined	User defined the total days of a period

Note! The [HrComponents.Country_char1] field is enabled only if the [HrComponents.Country_ny1] field identified the prorate component is set to any of the payment frequencies except for daily, once only and hourly. The [HrComp_Trans.Country_char1] with value "U" (User Defined) is only applicable to component with subtype "1200".

Country_char2 - Profit / loss base

The [HrComponents.Country_char2] field stores the amount of the profit or loss from the provident fund which will be shared with the fund contributors. The [HrComponents.Country_char2] field is available for components with subtype "1930" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
1930	Profit/loss from provident fund

The [HrComponents.Country_char2] field can have one of the following values:

Value	Description	Remark
B	Fund balance	Profit/loss calculated based on profit/ loss balance
P	Fund balance & Profit or Loss	Profit/loss calculated based on profit/ loss balance and profit/ loss

Country_char3 - Deduction

The [HrComponents.Country_char3] field stores the method for the deduction of loan repayment. The [HrComponents.Country_char3] field is available for components with subtype "1610", "1910" and "1951" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1610	Loan
1910	Provident fund loan
1951	Loan against indemnity benefits

The [HrComponents.Country_char3] field can have one of the following values:

Value	Description	Remark	Applicable for
C	Current period	Repay on the same month when a loan is released to resource	Components with subtype "1610", "1910", "1951"
N	Next period	Repay on the next month after a loan is released to resource	Components with subtype "1610", "1910", "1951"
S	With salary payments	Repay when there is a salary payment	Components with subtype "1610"
R	On resignation	Repay in the period that the resource last salary is calculated	Components with subtype "1951"

Country_char4 - Pension fund

The [HrComponents.Country_char4] field stores the different types of pension funds. The [HrComponents.Country_char4] field is available for components with subtype "2000" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
2000	Pension/ social security (for both employer and employee)

The [HrComponents.Country_char4] field can have one of the following values:

Value	Description	Remark	Applicable for
B	Basic fund	The total pension amount is subject to a limit of 1250	If the total pension amount is lesser than the basic fund (limit to 1250), the calculated pension amount will be used. If the total pension amount is more than the basic fund, the maximum value of 1250 will be used.
G	GOSI fund		The total pension amount is calculated based on the minimum and maximum values defined by user.
T	Takmeeli fund	The total pension amount is subject to a limit of 2250	If the total pension amount is lesser than the Takmeeli fund (limit to 2250), the calculated pension amount will be used. If the total pension amount is more than the Takmeeli fund, the maximum value of 2250 will be used.

Value	Description	Remark	Applicable for
N	Normal fund	No limit on the total pension amount	Nil

Country_char5 - Accrual factors

The [HrComponents.Country_char5] field stores the accrual factors for indemnity benefits calculation. The [HrComponents.Country_char5] field is available for components with subtype "1950" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
1950	Indemnity benefits

The [HrComponents.Country_char5] field can have one of the following values:

Value	Description	Remark
F	Fixed days	Denominator fixed for a component
C	Calendar days	Total days of the period

Country_char6 - Basis

The [HrComponents.Country_char6] field stores the calculation basis for all related financial components. The [HrComponents.Country_char6] field is available for the following components (stored in the [HrComponents.Comp_Sub_Type] field):

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime (by employer only)
1200	Unpaid leave (by employer only)
1300	Earning/Deduction affect pension (for both employer and employee)
1301	Earning/Deduction affect provident fund (for both employer and employee)
1302	Earning/Deduction affect pension and provident fund (for both employer and employee)
1400	Net earnings/Net deductions (for both employer and employee)

The [HrComponents.Country_char6] field can have one of the following values:

Subtype	Description
M	Monthly
Y	Yearly

Country_char7 - Methodology

The [HrComponents.Country_char7] field stores the methodology to calculate the payback of the indemnity benefits amount when a resource resigned or terminated. This field is available for component with subtype "1950" (store in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
1950	Indemnity benefits

This field contains the following values:

Subtype	Description
D	Day
P	Percentage

Country_float1 - Illness day 1/ overtime/ denominator/ Qualifying base value

The [HrComponents.Country_float1] field is shared to store the first range of illness day, the overtime day, the denominator or the qualifying base value for the pension deduction. The [HrComponents.Country_float1] field is available for components with subtype "1501", "1200", "1950" and "2000" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1501	Illness/ Illness repayment
1200	Unpaid leave
1950	Indemnity benefits
2000	Pension/Social security (for both employer and employee)

Illness day 1: The [HrComponents.Country_float1] field stores the resource's absent day for components with subtype of "1501". If the number of absent days is within the range specified in this field, the resource is entitled to a specific percentage of illness payment, depending on the first illness percentage (stored in the [HrComp_Trans.Country_float2] field). The [HrComponents.Country_float1] field is the first of five fields that stores such data. The other fields are [HrComponents.Country_float4] storing illness day 2, [HrComponents.Country_float6] storing illness day 3, [HrComponents.Country_float8] storing illness day 4 and [HrComponents.Country_float12] storing illness day 5.

Overtime: The [HrComponents.Country_float1] field is used to store the overtime day or unpaid leave day for components with subtype "1200". This field stores the day when a resource works overtime or take unpaid leave.

Denominator: The [HrComponents.Country_float1] field is used to store a denominator for components with subtype "1950". This field stores the number of days in a year for indemnity benefits calculation.

Qualifying base value: The [HrComponents.Country_float1] field stores the qualifying base value for the pension deduction for components with subtype of "2000".

Country_float2 - Illness percentage 1/ overtime rate/ exempt amount/ Maximum base value

The [HrComponents.Country_float2] field is shared to store the first illness percentage, overtime rate, the exempt amount or the maximum base value for the pension deduction. The [HrComponents.Country_float2] field is available for component with subtype "1200", "1501", "1950" and "2000" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1200	Overtime (by employer only)
1501	Illness/ Illness repayment
1950	Indemnity benefits
2000	Pension/Social security (for both employer and employee)

Illness percentage 1: The [HrComponents.Country_float2] field is used to store the illness payment in percentage in relation to the illness days (the [HrComponents.Country_float1] field) for components with subtype "1501". The illness payment is entitled to the resource in percentage when the resource actual absent days exceeds the first range of illness days (stored in the [HrComp_Trans.Country_float1] field). The [HrComponents.Country_float2] field is the first of five fields that stores such data. The other fields are [HrComponents.Country_float3] storing illness percentage 2, [HrComponents.Country_float5] storing illness percentage 3, [HrComponents.Country_float7] storing illness percentage 4 and [HrComponents.Country_float10] storing illness percentage 5.

Overtime rate: The [HrComponents.Country_float2] field is used to store the multiplier for the overtime hourly wage for components with subtype "1200". This field stores the overtime rate when a resource works for overtime.

Exempt amount: The [HrComponents.Country_float2] field is used to store the exempt amount for indemnity benefits calculation for components with subtype "1950".

Note! The [HrComponents.Country_float2] field is available for component with subtype "1950" only if the country code is set to "Kuwait" in the company data settings (where the [Bedryf.LandCode] field has the value "KW").

Maximum base value: The [HrComponents.Country_float2] field is used to store the maximum base value for the pension deduction for components with subtype of "2000".

Country_float3 - Illness percentage 2/ minimum bonus/ EOSB service year 1/ Days/ Service years/ Basis: Period

The [HrComponents.Country_float3] field is shared to store the second illness percentage, the minimum bonus amount, the first EOSB service year, the days to define overtime rate or the service years of a resource for the GOSI fund calculation. The [HrComponents.Country_float3] field is available for component with subtype "1100", "1501", "1950", "1200" and "2000" (store in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1200	Overtime
1501	Illness/ Illness repayment
1950	Indemnity benefits
2000	Pension/Social security (for both employer and employee)

Illness percentage 2: The [HrComponents.Country_float3] field is used to store the illness payment in percentage in relation to the illness days (the [HrComponents.Country_float4] field) for components with subtype "1501". The illness payment is entitled to the resource in percentage when the resource actual absent days exceeds the number of days specified in the second range of illness days (stored in the [HrComp_Trans.Country_float4] field). The [HrComponents.Country_float3] field is the second of five fields that stores such data. The other fields are [HrComponents.Country_float2] storing illness percentage 1, [HrComponents.Country_float5] storing illness percentage 3, [HrComponents.Country_float7] storing illness percentage 4 and [HrComponents.Country_float10] storing illness percentage 5.

Minimum bonus: The [HrComponents.Country_float3] field is used to store the minimum bonus amount for calculation for components with subtype "1100". This field stores the minimum amount to validate whether the bonus value falls within the range for the calculation.

EOSB service year 1: The [HrComponents.Country_float3] field is used to store the entitlement for the End of Service Benefits (EOSB)/ indemnity benefits based on service year for components with subtype "1950". If the number of service years is greater than or equal to the number specified in this field, the resource is entitled to a number of indemnity benefit days, indicated in the first range of indemnity benefit days (stored in the [HrComp_Trans.Country_float4] field). The [HrComponents.Country_float3] field is the first of three fields that stores such data. The other fields are [HrComponents.Country_float5] storing EOSB service year 2 and [HrComponents.Country_float7] storing EOSB service year 3.

Days: The [HrComponents.Country_float3] field is used to store the days to define overtime rate for components with subtype "1200". This field contains the following values:

Value	Description
1.0	Monday
2.0	Tuesday
3.0	Wednesday
4.0	Thursday
5.0	Friday
6.0	Saturday
7.0	Sunday
8.0	Public holidays

Service years: The [HrComponents.Country_float3] field is used to store the service years of a resource for the GOSI fund calculation in the "Contribution scale" section for components with subtype "2000".

Note! The "Contribution scale" section will only be enabled only if user select Pension fund = GOSI fund.

Basis: Period: The [HrComponents.Country_float3] field stores the payroll period where the system will get the calculated base salary to calculate the Pension / Social security amount for both employer and employee for component with subtype "2000" (store in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
2000	Pension/Social security (for both employer and employee)

This field contains the following values:

Value	Description
0.00	Current
1.00	1
2.00	2
3.00	3
4.00	4
5.00	5
6.00	6
7.00	7
8.00	8
9.00	9

Value	Description
10.00	10
11.00	11
12.00	12

Note! If the calculation has been made for this component, this 'Basis: Period' field will be disabled for the user to alter.

Country_float4 - Illness day 2/ EOSB day 1/ %

The [HrComponents.Country_float4] field is shared to store the second range of illness day, the first range of indemnity benefit days or the contribution percentage of a resource for the GOSI fund calculation. The [HrComponents.Country_float4] field is available for component with subtype "1501", "1950" and "2000" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1501	Illness/ Illness repayment
1950	Indemnity benefits
2000	Pension/Social security (for both employer and employee)

Illness day 2: The [HrComponents.Country_float4] field is used to store the resources absent days for components with subtype "1501". The number of days in this field is used when the number of absent day exceeds the first range of illness days specified in the [HrComp_Trans.Country_float1] field. The resource is entitled to a specific percentage of illness payment, depending on the second illness percentage (stored in the [HrComp_Trans.Country_float3] field). The [HrComponents.Country_float4] field is the second of five fields that stores such data. The other fields are [HrComponents.Country_float1] storing illness day 1, [HrComponents.Country_float6] storing illness day 3, [HrComponents.Country_float8] storing illness day 4 and [HrComponents.Country_float12] storing illness day 5.

EOSB day 1: The [HrComponents.Country_float4] field is used to store the entitlement of the indemnity benefit in days in relation to the service years for components with subtype "1950". This field calculates the indemnity benefit in days based on the first EOSB service year (stored in the [HrComponents.Country_float3] field). The [HrComponents.Country_float4] field is the first of three fields that stores such data. The other fields are [HrComponents.Country_float6] storing EOSB day 2 and [HrComponents.Country_float8] storing EOSB day 3.

%: The [HrComponents.Country_float4] field is shared to store the contribution percentage of a resource for the GOSI fund calculation in the "Contribution scale" section for components with subtype "2000".

Note! The "Contribution scale" section will only be enabled only if user select Pension fund = GOSI fund.

Country_float5 - Illness percentage 3/ maximum bonus/ EOSB service year 2

The [HrComponents.Country_float5] field is shared to store the third illness percentage, the maximum bonus amount or the second EOSB service year. The [HrComponents.Country_float5] field is available for component with subtype "1100", "1501" and "1950" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1501	Illness/ Illness repayment
1950	Indemnity benefits

Illness percentage 3: The [HrComponents.Country_float5] field is used to store the illness payment in percentage in relation to the illness days (the [HrComponents.Country_float6] field) for component with subtype "1501". The illness payment is entitled to the resource in percentage when the resource absent days exceeds the third range of illness days (stored in the [HrComp_Trans.Country_float6] field). The [HrComponents.Country_float5] field is the third of five fields that stores such data. The other fields are [HrComponents.Country_float2] storing illness percentage 1, [HrComponents.Country_float3] storing illness percentage 2, [HrComponents.Country_float7] storing illness percentage 4 and [HrComponents.Country_float10] storing illness percentage 5.

Maximum bonus: The [HrComponents.Country_float5] field is used to store the maximum bonus amount for calculation for components with subtype "1100". This field stores the maximum amount to validate whether the bonus value fall within the range for calculation.

EOSB service year 2: The [HrComponents.Country_float5] field is used to store the entitlement for the End of Service Benefits (EOSB)/ indemnity benefits based on service year for component with subtype "1950". If the number of service years is greater than or equal the amount specified in this field, the resource is entitled to a number of indemnity benefit days, indicated in the second range of indemnity benefit days (stored in the [HrComp_Trans.Country_float6] field). The [HrComponents.Country_float5] field is the second of three fields that stores such data. The other fields are [HrComponents.Country_float3] storing EOSB service year 1 and [HrComponents.Country_float7] storing EOSB service year 3.

Country_float6 - Illness day 3/ EOSB day 2

The [HrComponents.Country_float6] field is shared to store the third range of illness days or the second range of indemnity benefit days. The [HrComponents.Country_float6] field is available for component with subtype "1501" and "1950" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1501	Illness/ Illness repayment
1950	Indemnity benefits

Illness day 3: The [HrComponents.Country_float6] field is used to store the resources absent days for components with subtype "1501". The number of days in this field is used when the number of absent day exceeds the second range of illness days specified in the [HrComp_Trans.Country_float4] field. The resource is entitled to a specific percentage of illness payment, depending on on the third illness percentage (stored in the [HrComp_Trans.Country_float5] field). The [HrComponents.Country_float6] field is the third of five fields that stores such data. The other fields are [HrComponents.Country_float1] storing illness day 1, [HrComponents.Country_float4] storing illness day 2, [HrComponents.Country_float8] storing illness day 4 and [HrComponents.Country_float12] storing illness day 5.

EOSB day 2: The [HrComponents.Country_float6] field is used to store the entitlement of the indemnity benefit in days in relation to the service years for components with subtype "1950". This field calculates the indemnity benefit in days based on the second EOSB service year stored in the [HrComponents.Country_float5] field. The [HrComponents.Country_float6] field is the second of three fields that stores such data. The other fields are [HrComponents.Country_float4] storing EOSB day 2 and [HrComponents.Country_float8] storing EOSB day 3.

Country_float7- Illness percentage 4/ bonus start date/ EOSB service year 3

The [HrComponents.Country_float7] field is shared to store the fourth illness percentage, the bonus start date or the third EOSB service year. The [HrComponents.Country_float7] field is available for components with subtype "1100", "1501" and "1950" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1501	Illness/ Illness repayment
1950	Indemnity benefits

Illness percentage 4: The [HrComponents.Country_float7] field is used to store the illness payment in percentage in relation to the illness days (the [HrComponents.Country_float8] field) for components with subtype "1501". The illness payment is entitled to the resource in percentage when the resource absent days exceeds the fourth range of illness days (stored in the [HrComponents.Country_float8] field). The [HrComponents.Country_float7] field is the fourth of five fields that stores such data. The other fields are [HrComponents.Country_float2] storing illness percentage 1, [HrComponents.Country_float3] storing illness percentage 2, [HrComponents.Country_float5] storing illness percentage 3 and [HrComponents.Country_float10] storing illness percentage 5.

Bonus start date: The [HrComponents.Country_float7] field is used to store the start date of a bonus period for component with subtype "1100". This field stores the start date to validate whether the bonus fall within the range for calculation.

Note! The [HrComponents.Country_float7] field is enabled only if the frequency is set to once-only and must not be monthly in the [HrComponents.Country_ny1] field.

EOSB service year 3: The [HrComponents.Country_float7] field is used to store the entitlement for End of Service Benefits (EOSB)/ indemnity benefits based on service year for components with subtype "1950". If the number of service years is greater than or equal to the amount specified in this field, the resource is entitled to a number of indemnity benefit days, depending on the third range of indemnity benefit (stored in the [HrComponent.Country_float8] field). The [HrComponents.Country_float7] field is the third of three fields that stores such data. The other fields are [HrComponents.Country_float3] storing EOSB service year 1 and [HrComponents.Country_float5] storing EOSB service year 2.

Country_float8 - Illness day 4/ EOSB day 3

The [HrComponents.Country_float8] field is shared to store the fourth range of illness day or the third range of indemnity benefit days. The [HrComponents.Country_float8] field is available for components with subtype "1501" and "1950" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1501	Illness/ Illness repayment
1950	Indemnity benefits

Illness day 4: The [HrComponents.Country_float8] field is used to store the resources absent day for components with subtype "1501". The number of days in this field is used when the number of actual absent day exceeds the third range of illness days (stored in the [HrComponents.Country_float6] field). The resource is entitled to a specific percentage of illness payment, depending on the fourth illness percentage (stored in the [HrComponents.Country_float7] field). The [HrComponents.Country_float4] field is the fourth of five fields that stores such data. The other fields are [HrComponents.Country_float1] storing illness day 1, [HrComponents.Country_float4] storing illness day 2, [HrComponents.Country_float6] storing illness day 3 and [HrComponents.Country_float12] storing illness day 5.

EOSB day 3: The [HrComponents.Country_float8] field is used to store the entitlement of the indemnity benefit in days in relation to the service years for component with subtype "1950". This field calculates the indemnity benefit in days based on the third EOSB service year (stored in the [HrComponents.Country_float7] field). The [HrComponents.Country_float8] field is the third of three fields that stores such data. The other fields are [HrComponents.Country_float4] storing EOSB day 1 and [HrComponents.Country_float6] storing EOSB day 2.

Country_float9 - Accrual factor/ average period/ Terminated (days) / (%)

The [HrComponents.Country_float9] field is shared to store the accrual factor, average period or the number of days or percentage for the payback of the indemnity benefits amount when a resource terminated on the service years (stored in the [HrComponents.Country_float11] field). The [HrComponent.Country_float9] field is available for components with subtype "1100", "1300", "1301", "1302", "1400" and "1950" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1300	Deduction affect pension
1301	Deduction/earning affect provident fund
1302	Deduction/earning affect pension and provident fund
1400	Net deduction/earning
1950	Indemnity benefits

Accrual factor: The [HrComponents.Country_float9] field is used to store the number of day in relation to the accrual factors for indemnity benefits calculation for component with subtype "1950".

Note! The [HrComponents.Country_float9] is enabled only if the accrual factor is set to fixed days but not calendar in the [HrComponents.Country_char5] field and only if the country code is set to "Kuwait" in the company data settings (where the [Bedryf.LandCode] field has the value "KW").

Average period: The [HrComponents.Country_float9] field is used to store the value to calculate the average period for components with subtypes "1100", "1300", "1301", "1302" and "1400". This field is used when a resource does not wish to take the full amount but an average amount for a period to calculate the indemnity benefits.

Note! The [HrComponents.Country_float9] field will not include the current period for calculation if the [HrComponents.Country_ny2] field is not filled.

Terminated (days) / (%): The [HrComponents.Country_float9] field stores the number of days or percentage for the payback of the indemnity benefits amount when a resource terminated on the service years (stored in the [HrComponents.Country_float11] field) component with subtype "1950".

Country_float10 - Illness percentage 5/ Resigned (days) / (%)/ limit percentage

The [HrComponents.Country_float10] field is shared to store the fifth illness percentage, the resigned days or percentage, or the limit percentage. The [HrComponents.Country_float10] field is available for components with subtype "1501", "1950" and "1951" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1501	Illness/ Illness repayment
1950	Indemnity benefits
1951	Loan against indemnity benefits

Illness percentage 5: The [HrComponents.Country_float10] field is used to store the illness payment in percentage in relation to the illness days (the [HrComponents.Country_float12] field) for component with subtype "1501". The illness payment is entitled to the resource in percentage when the resource absent days exceeds the fifth range of illness days (stored in the [HrComponents.Country_float12] field). The [HrComponents.Country_float10] field is the fifth of five fields that stores such data. The other fields are [HrComponents.Country_float2] storing illness percentage 1, [HrComponents.Country_float3] storing illness percentage 2, [HrComponents.Country_float5] storing illness percentage 3 and [HrComponents.Country_float7] storing illness percentage 4.

Resigned (days) / (%): The [HrComponents.Country_float10] field is used to store the number of days or percentage of indemnity benefits for components with subtype "1950". This field is used to calculate the payback of the indemnity benefits amounts a resource will receive upon his/her resignation.

Note! The components with subtype "1950" allow the creation of multiple child components linked to itself as a parent component. The component's subtype codes for the child components are auto-generated during the creation. These child components will facilitate the creation of different resign percentage of indemnity benefits allocated to the resigned employee. The [HrComponents.Country_float10] field is available for components with subtype "1950" only if the resource have more than or equal to a specified terminate service year indicated in the [HrComponents.Country_float11] field.

Limit percentage: The [HrComponents.Country_float10] field is used to store the amount of the loan that can be taken by the resource for components with subtype "1951". This is to ensure a resource does not over commit. The loan limit stored in this field is defined as a percentage of the resource base salary.

Country_float11 - Terminate service year/ minimum service year

The [HrComponents.Country_float11] field is shared to stores the terminate service year or the minimum service year. The [HrComponents.Country_float11] field is available for components with subtype "1940" and "1950" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1940	Withdrawal from provident fund
1950	Indemnity benefits

Terminate service year: The [HrComponents.Country_float11] field is used to store the terminate service year for components with subtype "1950". The termination service year is used to get the number of days or percentage (refer to [HrComponents.Country_float10] field) for the payback of the indemnity benefits amount when a resource resigned or terminated.

Note! The components with subtype "1950" allow the creation of multiple child components linked to itself as a parent component. Similar to [HrComponents.Country_float10] field, this is done to facilitate different resign percentage of indemnity benefits based on the terminate service year (refer to [HrComponents.Country_float11] field) of the employee. The table below illustrates an example on the behavior of the fields:

Components Subtype	Service year [HrComponents.Country_float11]	Resign percentage [HrComponents.Country_float10]
1950 (parent component)		
#0001 (child component)	0	50%
#0002 (child component)	2	75%
#0003 (child component)	10	100%

Minimum service year: The [HrComponents.Country_float11] field is used to store the minimum service year for full entitlement of fund balance on loan for components with subtype "1940". A resource can only take back the remaining balance if he / she work more than the minimum service years.

Country_float12 - Illness day 5/ bonus end date

The [HrComponents.Country_float12] field is shared to store the fifth range of illness days or the bonus end date. The [HrComponents.Country_float12] field is available for components with subtype "1100" and "1501" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1501	Illness/ Illness repayment

Illness day 5: For component with subtype "1501", the [HrComponents.Country_float12] field is used to store the absent days for the resource. The number of days in this field is used when the number of absent days exceeds the fourth of illness days (stored in the [HrComponents.Country_float8] field). The resource is entitled to a specific percentage of illness payment, depending on the value stored in the [HrComponents.Country_float10] field. The [HrComponents.Country_float12] field is the fifth of five fields that stores such data. The other fields are [HrComponents.Country_float1] storing illness day 1, [HrComponents.Country_float4] storing illness day 2, [HrComponents.Country_float6] storing illness day 3 and [HrComponents.Country_float8] storing illness day 4.

Bonus end date: The [HrComponents.Country_float12] field is used to store the end date of a bonus period for components with subtype "1100". This field stores the end date to validate whether the bonus fall within the range for calculation.

Note! The [HrComponents.Country_float10] field is enabled only if the frequency is set to once-only and must not be monthly in the [HrComponents.Country_ny1] field.

Country_ny1 - Prorate component

The [HrComponents.Country_ny1] field indicates whether the component is a prorate component in order to perform a prorate calculation. The [HrComponents.Country_ny1] field is available for components with subtype "1100", "1200", "1300", "1301", "1302" and "1400" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1200	Unpaid Leave
1300	Earning/deduction affect pension
1301	Earning/deduction affect provident fund
1302	Earning/deduction affect pension and provident fund
1400	Net earning/deduction

The value "0" indicates the prorate component is not included for calculation. The value "1" indicates the prorate component is included for calculation.

Note! The [HrComponents.Country_ny1] field is only enabled if the prorate component is based on any of the frequencies except for daily, hourly and once-only. The [HrComponents.Country_ny1] field stores the value "1" if it is filled for component with subtype "1200". This enables the [HrComponent.Country_ny1] field to use the [HrComponents.Country_char1] field to calculate the component overtime hourly wages.

Country_ny2 - Include current period

The [HrComponents.Country_ny2] field indicates whether the average period includes the current period in the indemnity benefits calculation for components with subtype "1000", "1100", "1300", "1301", "1302" and "1400" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1300	Deduction affect pension
1301	Deduction/earning affect provident fund
1302	Deduction/earning affect pension and provident fund
1400	Net deduction/earning

The value "0" indicates that the current period is not included for calculation. The value "1" indicates the current period is included in the average calculation (in the [HrComponents.Country_float9] field).

Country_ny3 - Exclude absences/ Exclude (Absence)

Exclude absences: The [HrComponents.Country_ny3] field indicates whether the service years exclude the absence days in the indemnity benefits calculation for components with subtype "1950" (stored in the [HrComponents.Comp_Sub_Type] field). This field indicates whether to exclude days charged to certain activities such as unpaid leave days in the calculation of service years or not. The value "0" indicates the calculated service years will exclude the absence days. The value "1" indicates the service year calculation will start from the resource employment start date to the period end date.

Note! The [HrComponents.Country_ny3] field is available for component with subtype "1950" only if the country code is set to "United Arab Emirates" in the company data settings (where the [Bedryf.LandCode] field has the value "AE") and provided the [HrComponents.Origin] field is defined as not applicable.

Exclude (Absence): The [HrComponents.Country_ny3] field indicates whether to exclude payment of a resource for the related absences activities. This field has the following values:

Value	Description
0	No
1	Yes

Note! This field is applicable for all the Allowances components where Source = N/A, and Frequency = Periodically, Monthly, Weekly, Quarterly, Half-yearly, Yearly, 4-Weekly and Bi-Weekly. For example, the Allowances components with subtype "1000", "1100", "1300", "1301", "1302" and "1400" (stored in the [HrComponents.Comp_Sub_Type] field). This field is also applicable for Indemnity benefit component with subtype "1950". The component's subtype has the following description:

Subtype	Description
1000	Base salary
1100	Bonus
1300	Earning / Deduction affect Pension (for both employer and employee)
1301	Earning / Deduction affect provident fund (for both employer and employee)
1302	Earning / Deduction affect pension and provident fund (for both employer and employee)
1400	Net earnings / Net deductions (for both employer and employee)
1950	Indemnity benefit

Country_ny4 - Include excess in indemnity benefits/ Pension: Entered amount

Include excess in indemnity benefits: The [HrComponents.Country_ny4] field indicates whether the excess of the pension amount is included in the calculation of indemnity benefits for component with subtype "2000" (stored in the [HrComponents.Comp_Sub_Type] field). This field is normally used when a resource has a pension amount that exceeds the limit set by the fund (the [HrComponents.Country_char4] field). The value "0" indicates it has not included the excess in indemnity benefits. The value "1" indicates the calculation of indemnity benefits will depend on the pension and the excess pension amount will be included in the base value for indemnity benefits.

Note! The [HrComponents.Country_ny4] field is available for component with subtype "2000" only if the pension fund type is "Takmeeli" in the [HrComponents.Country_char4] field.

Pension: Entered amount: The [HrComponents.Country_ny4] field stores the status of the "Pension: Entered amount" checkbox. This field is available for components with subtype "1000", "1300" and "1302" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
1000	Base salary
1300	Earning / Deductions affect Pension
1302	Earning / Deductions affect pension and provident funds

The [HrComponents.Country_ny4] field has the value "0" (unchecked) to indicate that the calculation will be based on the actual calculated amount. This field has value "1" (checked) to indicate that the calculation method for the above components will be based on 'Entered amount' in the component maintenance.

Note! The [HrComponents.Country_ny4] field is available for component with subtype "2000" only if the pension fund type is "GOSI fund" in the [HrComponents.Country_char4] field.

Country_ny6 - Use: Formula

The [HrComponents.Country_ny6] field indicates if the user has the flexibility to define formulas for components with subtype "1100", "1300", "1400" and "2100" (store in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
1100	Bonus
1300	Earning / Deduction affect Pension (for both employer and employee)
1400	Net earning / deduction (for both employer and employee)
2100	Deduction (for both employer and employee)

This field has the following values:

Value	Description
0	No
1	Yes

Note! This 'Use: Formula' checkbox will only be enabled when Unit = 'Amount' is selected. This is because the formulas are for calculating the amount instead of calculating the percentage.

Country_String1 - Employer reference number

The [HrComponents.Country_string1] field stores the employer reference number when a company declares the deduction components. The [HrComponents.Country_string1] field is available for the component with subtype "2000" (stored in the [HrComponents.Comp_Sub_Type] field).

Note! The [HrComponents.Country_string1] field is enabled only if the components are paid by employer for components with subtype "2000" (where the [HrComponents.Paid_By] field has the value "R").

FormulaField - Base value/ Formula

Base value: The [AEHrPayroll.FormulaField] field stores all the related components as the base value for the vacation payment calculation. This field is used for component with subtype "1970" (store in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
1970	Vacation payment

Formula: The [AEHrPayroll.FormulaField] field stores the formula defined for calculating the amount of components with subtype "1100", "1300", "1400" and "2100" (store in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
1100	Bonus
1300	Earning / Deduction affect Pension (for both employer and employee)
1400	Net earning / deduction (for both employer and employee)
2100	Deduction (for both employer and employee)

Note! User is able to define formula for the above components when the "Use: formula" checkbox is checked (where the [HrComponents.Country_ny6] field = '1').

46.7 Commission method components

All data from the commission method components (except for the N:M relations) are stored in the [HrComponents] table. Commission method components are only available in e-Synergy. In this section, the fields in the [HrComponents] table that are used differently or have a specific value for commission method components are described.

Comp_Sub_Type - Component subtype

The [HrComponents.Comp_Sub_Type] field is filled with the value "7500" for commission method components.

Comp_Type - Component type

The [HrComponents.Comp_Type] field is filled with the value "P" for commission method components.

Country_char1 - Country specific character field 1

The [HrComponents.Country_char1] field stores the type of commission method. The following values can be used:

Value	Description
1	(Revenue) * %
2	(Revenue / Budget) % * Revenue * %
3	(Revenue)* % -/- costs
4	(Revenue/ Budget) % * Revenue * % -/- costs
5	(Revenue -/- Costs of employment) * % -/- Costs
6	(Revenue / Budget)% * (Revenue -/- Costs of employment) * % -/- Costs
7	(Revenue / Budget)% * Amount
8	(Revenue / Budget)% - Minimum % * Factor * Amount

Country_char2 - Country specific character field 2

The [HrComponents.Country_char2] field stores the base value method of the commission method component. The following values can be used:

Value	Description
A	Accounts
B	Project
C	Cost center
D	Division
G	Group
H	Holding
P	Cost center group
R	Resource

Country_float1 - Country specific number field 1

The [HrComponents.Country_float1] field stores the minimum percentage of the commission method component; below this minimum, no commission is calculated.

Country_float2 - Country specific number field 2

The [HrComponents.Country_float2] field stores the maximum percentage of the commission method component; above this maximum, no commission is calculated.

Country_float3 - Country specific number field 3

The [HrComponents.Country_float3] field stores the factor 1 that should be used if the type of commission method is "(Revenue / Budget) % - Minimum % * Factor * Amount" (so the [HrComponents.Country_char1] field has the value "8").

Country_float4 - Country specific number field 4

The [HrComponents.Country_float4] field stores the "Upgrade factor". The field indicates if factor 1 ([HrComponents.Country_float3] field) or factor 2 (the [HrComponents.Country_float5] field) should be used. If the percentage of (Revenue / Budget) is higher than the value of the "Upgrade factor" field, then factor 2 will be used; else factor 1 will be used.

Country_float5 - Country specific number field 5

The [HrComponents.Country_float5] field stores the factor 2 that should be used if the type of commission method is "(Revenue / Budget) % - Minimum % * Factor * Amount" (so the [HrComponents.Country_char1] field has the value "8").

Country_ny1 - Country specific no / yes field 1

The [HrComponents.Country_ny1] field indicates if the commission calculated is based on a cumulative or monthly basis.

Country_string1 - Country specific text field 1

The [HrComponents.Country_string1] field stores the cost center group linked to the commission method component. This field is only filled when the base value method has the value "Cost center group" (so the [HrComponents.Country_char2] field has the value "P"). The [HrComponents.Country_string1] field refers to the [CostCenterClasses.CostCenterClassNames] field.

Currency - Currency

The [HrComponents.Currency] field stores the currency of the commission method component. The user can select the currency manually. The [HrComponents.Currency] field refers to the [Valuta.ValCode] field.

Default_Percentage - Percentage of revenue

The [HrComponents.Default_Percentage] field stores the percentage of revenue.

Descr50_0 - Description

The [HrComponents.Descr50_0] field stores the description of the commission method component. Default value is "Commission" but can be changed by the user.

Edit_Resource_Level - Adjustable

The [HrComponents.Edit_Resource_Level] field indicates if the commission method component is adjustable at resource level.

EndDate - End date

The [HrComponents.EndDate] field stores the end date of the commission method component. The end date must lie behind the start date (the [HrComponents.StartDate] field).

OriginalCode - Budget version

The [HrComponents.OriginalCode] field stores the code of the budget version that is linked to the commission method component. The [HrComponents.OriginalCode] field refers to the [Bdgvrs.Bud_vers] field.

Parent_Code - Payroll component

The [HrComponents.Parent_Code] field stores the code of the payroll component that is linked to the commission method component. The [HrComponents.Parent_Code] field refers to the [HrComponents.Comp_Code] field.

StartDate - Start date

The [HrComponents.StartDate] field stores the start date of the commission method component.



Chapter 47 | HrComp_Resource - Resource specific components

47. HrComp_Resource - Resource specific components

47.1 General description

The [HrComp_Resource] table stores the information about the components per resource. Per country, some fields have specific values / definitions. These will be described per country, after the general description of the fields. The components that are supplied by Exact Software (of which the calculation is defined by law) are not linked to a resource. These components are automatically included in the payroll calculation, based on the resource specific payroll settings (the [HrPayroll] table).

47.2 HrComp_Resource field details

Amount - Amount

The [HrComp_Resource.Amount] field stores the amount of the resource specific component that will be used in the calculation. The default value is retrieved from the [HrComponents.Default_Amount] field. Whether or not it is possible to edit this default value depends on the [HrComponents.Edit_Resource_Level] field.

BankAccount - Bank account

The [HrComp_Resource.BankAccount] field stores the bank account to which an amount will be paid. The value of this field will be copied from the [HrComponents.BankAccount] field if available and depending on the component can be changed when linking the component to a resource. The [HrComp_Resource.BankAccount] field refers to the [Bnkacc.Bnknr] field and the [Bnkkop.Bank_rek] field.

Comp_Code - Component

The [HrComp_Resource.Comp_Code] field stores the code of the component that is linked to the resource. The [HrComp_Resource.Comp_Code] field refers to the [HrComponents.Comp_Code] field.

CompanyCode - Company code

The [HrComp_Resource.CompanyCode] field stores the code of the division to which the resource belongs to (at the moment the component is linked to the resource). The value from the field [Humres.Comp] will be copied to the [HrComp_Resource.CompanyCode] field. The user cannot change this field. The [HrComp_Resource.CompanyCode] field refers to the [Bedryf.Bedrnr] field.

ComponentGuid - Component Guid

The [HrComp_Resource.ComponentGuid] field stores the unique ID for the resource specific component. The [HrComp_Trans.ComponentGuid] field refers to this field to have a clear link between the [HrComp_Trans] table and the [HrComp_Resource] table.

Contract - Contract

The [HrComp_Resource.Contract] field indicates if a component is linked to a contract. This field is only used if a country uses the contract system in e-Payroll (currently only Spain, Germany and Austria). The value "0" indicates that the component for this resource is not used in the contract system; the value "1" or higher indicates that the component for this resource is used in the contract system.

Note! Contracts are stored as records in the [HrPayroll] table where [HrPayroll.Type] = "C".

Country_char1 - Country specific character field 1

The [HrComp_Resource.Country_char1] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char2 - Country specific character field 2

The [HrComp_Resource.Country_char2] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char3 - Country specific character field 3

The [HrComp_Resource.Country_char3] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_date1 - Country specific date field 1

The [HrComp_Resource.Country_date1] field is used to store overtime date while was previously was stored in hrcomp_resource.country_float1.
(For Malaysian legislation)

Country_date2 - Country specific date field 2

The [HrComp_Resource.Country_date1] field is used to store overtime date while was previously was stored in hrcomp_resource.country_float2.
(For Malaysian legislation)

Country_float1 - Country specific number field 1

The [HrComp_Resource.Country_float1] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float2 - Country specific number field 2

The [HrComp_Resource.Country_float2] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float3 - Country specific number field 3

The [HrComp_Resource.Country_float3] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float4 - Country specific number field 4

The [HrComp_Resource.Country_float4] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float5 - Country specific number field 5

The [HrComp_Resource.Country_float5] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny1 - Country specific no / yes field 1

The [HrComp_Resource.Country_ny1] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny2 - Country specific no / yes field 2

The [HrComp_Resource.Country_ny2] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny3 - Country specific no / yes field 3

The [HrComp_Resource.Country_ny3] field is used to define country specific details for a resource specific component. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Creditor - Creditor

The [HrComp_Resource.Creditor] field stores the creditor number linked to the resource specific component. The [HrComp_Resource.Creditor] field refers to the [Cicmpy.Crdnr] and [DivisionCreditors.Creditor] fields. The [HrComp_Resource.Creditor] field will be default filled with the value of the [HrComponents.Account] field for component of type "D" and "T". For other component types, the field will be default filled with the value of the [Humres.Creditor] field.

Creditor_Account - Creditor account

The [HrComp_Resource.Creditor_Account] field stores the general ledger account number on which the outstanding items will be created for the resource specific component. The value of the [HrComponents.Creditor_Account] field will be copied to the [HrComp_Resource.Creditor_Account] field. The [HrComp_Resource.Creditor_Account] field refers to the [Grtbk.Reknr] field.

Note! In some country specific functionality, the value can be defined for certain resource specific components (depending on the subtype of the component (the [HrComponents.Comp_Sub_Type] field).

Creditor_CostCenter - Cost center

The [HrComp_Resource.Creditor_CostCenter] field is not used.

Creditor_CostUnit - Cost unit

The [HrComp_Resource.Creditor_CostUnit] field is not used.

Deviating_descr50 - Deviating description

The [HrComp_Resource.Deviating_descr50] field stores the deviating description of the resource specific component. By default the description of the component will be used (the [HrComponents.Descr50] field).

Division - Division

The [HrComp_Resource.Division] field stores the division code. The [HrComp_Resource.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used at this moment. It is added for future functionality.

DocAttachmentID - Attachment ID

A user can add an attachment to the resource specific component. The attachment can contain additional information which is relevant to the resource specific component. The attachment can be any type of file, such as an Excel sheet, an image, or a Word document. Attachments are stored as documents in the [BacoDiscussions] table, which is the central document table. The system uses the attachment id field to store a unique reference to the document in the [BacoDiscussions] table. The [HrComp_Resource.DocAttachmentID] field refers to the [BacoDiscussions.ID] field.

EndDate - End date

The [HrComp_Resource.EndDate] field stores the end date of the resource specific component. If the end date lies before the current date, the resource specific component is inactive. If there are resource specific components with the same code (the [HrComp_Resource.Comp_Code] field), then the end date of the first resource specific component must lie before the start date of the second resource specific component.

HourlyWage - Hourly wage

The [HrComp_Resource.HourlyWage] field stores the hourly wage for the resource specific component. When linking such a component to a resource, the hourly wage will be calculated (if enabled) using the amount stored in the [HrComp_Resource.Amount] field and the hours per day and days per week values. The user can also manually fill an hourly wage.

Note! By default, the hours per day and days per week values are retrieved from the work schedule of the resource. Per country different calculation methods can apply.

ID - ID

The [HrComp_Resource.ID] field stores the system generated database record identification number. This field is not functionally used.

Job_Title - Job title

The [HrComp_Resource.Job_Title] field stores the job title of the resource to which a component is linked. For wage scale components, via the job title, the job group is determined. Based on the job group the amount can be retrieved from the wage scale in case the job group is one of the dimensions in the wage scale. The [HrComp_Resource.Job_Title] field refers to the [Hrjbtl.Job_Title] field.

Ledger_Account - General ledger account number

The [HrComp_Resource.Ledger_Account] field stores the general ledger account number on which the costs and revenues will be booked for this resource specific component. The value of the [HrComponents.Ledger_Account] will be copied to this field.

Note! In some country specific functionality, the value can be defined for certain resource specific components (depending on the subtype of the component (the [HrComponents.Comp_Sub_Type] field).

Ledger_CostCenter - Cost center

The [HrComp_Resource.Ledger_CostCenter] field stores the cost center for which a deviating general ledger account number is defined for the resource specific component. The [HrComp_Resource.Ledger_CostCenter] field is filled with the cost center of the resource (the [Humres.CostCenter] field) by default. The [HrComp_Resource.Ledger_CostCenter] field refers to the [Kstpl.KstplCode] field.

Note! At the moment, it is only possible in German, Austrian or US legislation to define the deviating cost center for the resource specific component.

Ledger_CostUnit - Cost unit

The [HrComp_Resource.Ledger_CostUnit] field stores the cost unit for which a deviating general ledger account number is defined for the resource specific component. The [HrComp_Resource.Ledger_CostUnit] field refers to the [Kstdr.KstdrCode] field.

Note! At the moment, it is only possible in German or Austrian legislation to define the deviating cost unit the resource specific component.

LocalCode - Local code

The [HrComp_Resource.LocalCode] field stores the city or community for which the resource specific component is used. The value of the [HrComponents.LocalCode] is copied to this field.

Notes - Notes

The user can add a note to a resource specific component. Notes are stored as documents in the [BacoDiscussions] table, which is the central document table of Exact Globe and e-Synergy. The system uses the [HrComp_Resource.Notes] field to store a unique reference to the document in the [BacoDiscussions] table. The [HrComp_Resource.Notes] field refers to the [BacoDiscussions.ID] field.

Number - Number

The [HrComp_Resource.Number] field stores the quantity of the resource specific component. During the payroll calculation, this quantity will be multiplied by the amount of the resource specific component (the [HrComp_Resource.Amount] field) or when interpreted as hourly it will be multiplied by the hourly wage (the [HrComp_Resource.HourlyWage] field).

Note! Whether or not the [HrComp_Resource.Number] field is available for a component or not depends on the country. For more information see the Country specific section(s).

Number_Days_Period - Number of days per period

The [HrComp_Resource.Number_Days_Period] field stores number of days per period if applicable for the resource specific component.

Note! The [HrComp_Resource.Number_Days_Period] field is only available in Austrian and German legislation.

Paid_By - Paid by

The [HrComp_Resource.Paid_By] field indicates who will pay the component. The value of the [HrComponents.Paid_By] field is copied to this field. The [HrComp_Resource.Paid_By] field refers to the DDTests table which contains the following values for this field:

Value	Description
E	Employee
R	Employer

Note! The [HrComp_Resource.Paid_By] field should not be used anymore. The [HrComponents.Paid_By] field is currently used for all validations.

Percentage - Percentage

The [HrComp_Resource.Percentage] field stores the percentage that will be used in the calculation of the resource specific component. This field is only filled if the component is handled as a percentage (so the [HrComponents.Unit] field has the value "P"). Whether or not the [HrComp_Resource.Percentage] field can be edited, depends on the [HrComponents.Edit_Resource_Level] field.

Priority - Priority

The [HrComp_Resource.Priority] field indicates which premium / tax components should be calculated first and which should be calculated after these first components. This functionality will be used in situations where the resource does not have enough salary to pay all premiums / taxes. The components with the lowest priority will be calculated first until the maximum amount that should be deducted is reached.

Note! The [HrComp_Resource.Priority] field is only available in US legislation.

Project - Project

The [HrComp_Resource.Project] field stores the project code which is linked to the resource specific component. The project cannot be manually entered by the user, but is filled by the "Detaching" application or the PSA module. The project is used in E-Payroll to print the project name, account and account address on the payroll slip per period, per project and per component. The [HrComp_Resource.Project] field refers to the [PrProject.ProjectCode] field.

ReferenceCode - Reference code

The [HrComp_Resource.ReferenceCode] field stores a reference to a cost price component. Based on this cost price component, the cost price and sales price can be calculated and used for invoicing hours and components to the customers. The reference code is filled by the "Detaching" application (in e-Synergy) and cannot be manually adjusted in the resource specific components. The [HrComp_Resource.ReferenceCode] field refers to the [HrComponents.Comp_Code] field.

ReferenceNr1 - Reference

The [HrComp_Resource.ReferenceNr1] field stores a reference number for the resource for a third party like the Tax Authority or the Social Security Organization (only when the social security number is not used there). Whether or not this field is available when linking a component to a resource is country dependent. If the [HrComp_Resource.ReferenceNr1] field is filled, and a general ledger account number of the type "Creditor account" is linked in the [HrComp_Resource.Creditor_Account] field, then this reference is processed as payment description (the [Gbkm.Betaalref] / the [BankTransactions.OffsetReference] fields).

Note! The [HrComp_Resource.ReferenceNr1] field is only available in Dutch and Malaysian legislation.

ReferenceNr2 - Extra reference

The [HrComp_Resource.ReferenceNr2] field is not used.

Res_ID - Resource ID

The [HrComp_Resource.Res_ID] field stores the ID of the resource to which the component is linked. The [HrComp_Resource.Res_ID] field refers to the [Humres.Res_ID] field.

SalaryScale - Salary scale

The [HrComp_Resource.SalaryScale] field stores the scale of the resource specific component. This field is used to retrieve the correct amount (from the corresponding component for that specific scale). This field is only available if the component has "Scale" as one of the dimensions (so components where [HrComponents.JobActivity] has "S" in the value). The [HrComp_Resource.SalaryScale] field refers to the [HrFree.RecKey] field (where the [HrFree.FileType] field equals "SC").

Note! For components with the entity "Scale", amounts can be defined for the available scales (which are stored in the [HrFree] table). These amounts (scale lines) are stored as child components of the main component. The value of the resource specific component (the [HrComp_Resource.Amount] field) is retrieved from these scale lines.

Scale - Scale

The [HrComp_Resource.Scale] field stores the job level of the resource specific component. This field is only available if the selected component has "Job level" as one of the dimensions (so components where [HrComponents.JobActivity] has "L" in the value). The value of the [HrComp_Resource.Scale] field lies between the minimum and maximum job level for the job title of the resource (the [Hrjbtl.ScaleMin] and [Hrjbtl.ScaleMax] fields) if the selected component does not include "Scale" as dimension. The value of the [HrComp_Resource.Scale] field refers to the [HrComponents.Scale] field if the selected component also includes "Scale" as dimension.

StartDate - Start date

The [HrComp_Resource.StartDate] field stores the start date of the resource specific component. If 2 or more resource specific components with the same code exist, then the start date of the second resource specific component with the same code has to lie after the end date (the [HrComp_Resource.EndDate] field) of the first resource specific component.

StateCode - State code

The [HrComp_Resource.StateCode] field stores the code of the state of the resource specific component. The value of the [HrComponents.StateCode] field is copied to this field.

Note! The [HrComp_Resource.StateCode] field is only used in German and USA legislation.

Syscreated - Syscreated

The [HrComp_Resource.Syscreated] field stores the date and time when a component was created. The system populates this field for all components.

Syscreator - Syscreator

The [HrComp_Resource.Syscreator] field stores the creator of a component. The system populates this field for all components. The [HrComp_Resource.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [HrComp_Resource.SysGuid] field stores a unique identifier and is used for technical reasons only. It has no functional meaning. The system populates this field for all components.

Sysmodified - Sysmodified

The [HrComp_Resource.Sysmodified] field stores the date and time when a component was last modified. Initially, this field contains the creation date. When a user modifies a component, the date and time stored in the [HrComp_Resource.Sysmodified] field are changed to the date and time of modification. The system populates this field for all components.

Sysmodifier - Sysmodifier

The [HrComp_Resource.Sysmodifier] field stores the ID of the person who modified a component. Initially, this field contains the creator ID. When a user modifies a component, the modifier ID stored in the [HrComp_Resource.Sysmodifier] field is changed to the ID of the user who modified the component. The system populates this field for all components. The [HrComp_Resource.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrComp_Resource.Timestamp] field is a technical field, which the SQL server triggers. The timestamp sorts the components in created or changed order. The system assigns a new timestamp for each new component and updates the timestamp of the changed components. The system uses the timestamp for replication. The replication process uses only the components that have the latest timestamp, which means that the target system receives only the new or updated components.

47.3 Country specific field details - Netherlands (NL)

Number - Number

The [HrComp_Resource.Number] field stores the quantity of the resource specific component. During the payroll calculation, this quantity will be multiplied by the amount of the resource specific component (the [HrComp_Resource.Amount] field). The [HrComp_Resource.Number] field is only available for the following components:

- Hour components where the origin is "Time" (so components where the [HrComponents.Comp_Sub_Type] field has the value "1850" or "1860" and where the [HrComponents.Origin] field has the value "T"),
- Components of type "Bruto kilometer vergoeding" or "Netto kilometer vergoeding" (so components where the [HrComponents.Comp_Sub_Type] field has the value "1800" or "1810"),
- Hour components where the origin of numbers or days of the component (the [HrComponents.Origin] field) has the value "N".
- Components that
 - are paid by the hour (so the [HrComponents.PaymentPeriod] = "H")
 - where the origin of number or days of the component has the value "N" (so the [HrComponents.Origin] field has value "N").
 - are one of the following subtypes
 - "Bruto toeslag" ([HrComponents.Comp_Sub_Type] = "1020")
 - "Netto te bruteren toeslag" ([HrComponents.Comp_Sub_Type] = "1030")
 - "Netto inhouding" ([HrComponents.Comp_Sub_Type] = "1100")
 - "Netto toeslag type onkostenvergoeding" ([HrComponents.Comp_Sub_Type] = "1120")
 - "Fiscale bijtelling" ([HrComponents.Comp_Sub_Type] = "1200")
 - "Netto te bruteren fiscale bijtelling" ([HrComponents.Comp_Sub_Type] = "1210")
 - "Loon in natura" ([HrComponents.Comp_Sub_Type] = "1400")
 - "Fiscale bijtelling in natura" ([HrComponents.Comp_Sub_Type] = "1700")

47.4 Country specific field details - China (CN)

Bankaccount - Bank account

The [HrComp_Resource.Bankaccount] field stores the bank account number that are copied from the [HrComponents.bankaccount] field, once the [HrComponents.bankaccount] field is filled with the bank account number. The [HrComp_Resource.Bankaccount] field is filled for components with subtype "2000", "2100", "2200", "2300", "2400", "2500", "4100" (at the [HrComponents.Comp_sub_type] field) . The component's subtype has the following descriptions:

Subtype	Description
2000	Pension Insurance
2100	Unemployment Insurance
2200	Medical Insurance
2300	Maternity Insurance
2400	Injury Insurance
2500	Housing Fund
4100	Supplementary bank account

Depending on the amount or the percentage that has been entered to this component, if this field is filled, the net salary will be allocated to the [HrComp_Resource.Bankaccount] field. The remaining of the net salary will be allocated to the resource's default bank account in the [HUMRES.bankac_0] field.

Country_float1 - Fixed base value

The [HrComp_Resource.Country_float1] field stores the fixed base value for deduction. The [HrComp_Resource.Country_float1] field is filled for only social insurance and housing fund components with subtype "2000", "2100", "2200", "2300", "2400" and "2500" at the [HrComponents.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
2000	Pension Insurance
2100	Unemployment Insurance
2200	Medical Insurance
2300	Maternity Insurance
2400	Injury Insurance
2500	Housing Fund

Note! If the [HrComp_Resource.Country_float1] field stores an amount, then the [HrComp_Trans.Cal_country_float1] field will calculate the fixed base value with this amount.

Number - Quantity

The [HrComp_Resource.Number] field stores the total amount of overtime rate and allowances. The [HrComp_Resource.Number] field is only filled for components with subtype "1100", "1200", "1300", "1350", "1400" and "1450" at the [HrComponents.Comp_sub_type] field , provided the [HrComponents.Origin] field is defined as not applicable (N/A). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1200	Overtime (Daily)
1300	Fixed allowance
1350	Variable allowance
1400	Gross deduction
1450	Net deduction

47.5 Country specific field details - Malaysia (MY)**BankAccount** - Bank account

The [HrComp_Resource.BankAccount] field stores the bank account number. The [HrComp_Resource.BankAccount] field is filled for components with subtype "2100", "2101", "2102", "2103", "2104", "2105", "3000", "3100" and "4100" (stored in the [HrComponents.Comp_Sub_Type] field) to store the supplementary bank account of the resource specific component . The component's subtype has the following descriptions:

Subtype	Description
2100	Employee Provident Fund (EPF)
2101	Social Security Organization (SOCSO)
2102	Human Resource Development Fund
2103	Non-monetary benefits
2104	Amanah Saham Nasional
2105	Tabung Haji
3000	Scheduled tax deduction (PCB)
3100	CP38 deduction
4100	Supplementary bank account

Country_float1 - Overtime date

The [HrComp_Resource.Country_float1] field stores the overtime date of a resource who worked overtime. This field is also used to retrieve the correct basic salary amount to calculate the overtime wage. The [HrComp_Resource.Country_float1] field is only available for component with subtype "1200" which is the overtime (daily) component.

Number - Quantity

The [HrComp_Resource.Number] field stores the number/quantity for the components with subtype "1200" and "1300" provided the [HrComponents.Origin] field has the value 'N'. The component's subtype has the following descriptions:

Subtype	Description
1200	Overtime (Daily)
1300	Fixed allowance

47.6 Country specific field details - Middle East (AE)

Country_float1 - Offset balances

The [HrComp_Resource.Country_float1] field indicates whether to offset the outstanding loan balance for component with subtype "1610" (stored in the [HrComponents.Comp_Sub_Type] field). The value "0" indicates it has not included the offset amount in the loan balances. The value "1" indicates the outstanding balance is being offset and deducted from the current loan which applies to the same period.

ReferenceNr1 - Installment amount

The [HrComp_Resource.ReferenceNr1] field stores the monthly installment amount for the loan repayment in a number of periods. The [HrComp_Resource.ReferenceNr1] field is available for component with subtype of "1610", "1951" and "1960" (stored in the [HrComponents.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1610	Loan
1951	Loan against indemnity benefits (N)
1960	Accrual of expenses

ReferenceNr2 - Reference of loan repayment

The [HrComp_Resource.ReferenceNr2] field stores the reference and relation within the loan repayment. This field is used to link the installments for repayment calculation purpose. The [HrComp_Resource.ReferenceNr2] field is available for component with subtype of "1610" and "1960" (stored in the [HrComponents.Comp_Sub_Type] field).

Note! The [HrComp_Resource.ReferenceNr2] field is stored in the format of <Res_ID>-<YYYY>-<MM>-<Number>. The value in the 'Number' is a running number and it will increase if there is more than one component using the [HrComp_resource.ReferenceNr2] field.



Chapter 48 | HrComp_Trans - Payroll transactions

48. HrComp_Trans - Payroll transactions

48.1 General description

The [HrComp_Trans] table stores the payroll transactions that are generated during a payroll calculation. The generated payroll transactions are the result of the resource specific components, the resource specific payroll settings (which will amongst others trigger including the components that are supplied by Exact Software and not linked to a resource), the component definitions and the planning of the resource (the MRS records). During a payroll calculation, the country specific rules are applied.

48.2 HrComp_Trans field details

Amount_Costs - Costs

The [HrComp_Trans.Amount_Costs] field stores the employer costs of the calculated component. Whether or not costs are calculated for a component depends on the calculation of the component, which is country specific. For a calculation per year / period / resource / run number, the sum of the [HrComp_Trans.Amount_Costs] and the [HrComp_Trans.Amount_To_Be_Paid] equals "0.00".

The following generally applies:

- If the [HrComp_Trans.Comp_Type] field = "F" and the [HrComp_Trans.Paid_By] field = "E", then the [HrComp_Trans.Amount_To_Be_Paid] field is filled;
- If the [HrComp_Trans.Comp_Type] field = "D" and the [HrComp_Trans.Paid_By] field = "E", then the [HrComp_Trans.Amount_To_Be_Paid] field is filled;
- If the [HrComp_Trans.Comp_Type] field = "T" and the [HrComp_Trans.Paid_By] field = "E", then the [HrComp_Trans.Amount_To_Be_Paid] field is filled;
- If the [HrComp_Trans.Comp_Type] field = "B" and the [HrComp_Trans.Paid_By] field = "E", then the [HrComp_Trans.Amount_To_Be_Paid] field is filled;
- If the [HrComp_Trans.Comp_Type] field = "R" and the [HrComp_Trans.Paid_By] field = "E", then the [HrComp_Trans.Amount_To_Be_Paid] field is filled;
- If the [HrComp_Trans.Comp_Type] field = "F" and the [HrComp_Trans.Paid_By] field = "R", then the [HrComp_Trans.Amount_Costs] field is filled;
- If the [HrComp_Trans.Comp_Type] field = "D" and the [HrComp_Trans.Paid_By] field = "R", then the [HrComp_Trans.Amount_Costs] field and the [HrComp_Trans.Amount_To_Be_Paid] field are filled;
- If the [HrComp_Trans.Comp_Type] field = "T" and the [HrComp_Trans.Paid_By] field = "R", then the [HrComp_Trans.Amount_Costs] field and the [HrComp_Trans.Amount_To_Be_Paid] field are filled;
- If the [HrComp_Trans.Comp_Type] field = "R" and the [HrComp_Trans.Paid_By] field = "R", then the [HrComp_Trans.Amount_Costs] field and the [HrComp_Trans.Amount_To_Be_Paid] field are filled;
- For "Payment in kind" components, the [HrComp_Trans.Amount_Costs] field and the [HrComp_Trans.Amount_To_Be_Paid] field are filled.

Note! For more information see the Country specific section(s).

Amount_To_Be_Paid - Amount to be paid

The [HrComp_Trans.Amount_To_Be_Paid] field stores the amount that has to be paid to the employee or a third party. Whether or not an amount will have to be paid for a component depends on the calculation of the component, which is country specific. For a calculation per year / period / resource / run number, the sum of the [HrComp_Trans.Amount_Costs] and the [HrComp_Trans.Amount_To_Be_Paid] equals "0.00". For information about the general rule when the [HrComp_Trans.Amount_To_Be_Paid] field is filled, see the description of the [HrComp_Trans.Amount_Costs] field.

Note! For more information see the Country specific section(s).

BankAccount - Bank account

The [HrComp_Trans.BankAccount] field stores the main bank account of the creditor that is applicable for the component. The value of the [HrComp_Trans.BankAccount] field is retrieved from the [HrComp_Resource.BankAccount] field or from the [HrComponents.BankAccount] field. The [HrComp_Trans.BankAccount] field refers to the [Bnkacc.Banknr] field and the [Bnkkop.Bank_rek] field.

Note! If the value in this field is "NULL" and a general ledger account number of the type "Creditor" account is linked to the component, then it is assumed it is a cash payment.

Base_Value - Base value

The [HrComp_Trans.Base_Value] field stores the base value for the calculation of the component. What exactly is stored in this field is depending on the country. For more information see the Country specific section(s).

Calc_Country_float1 - Country specific number calculation field 1

The [HrComp_Trans.Calc_Country_float1] field stores country specific calculation details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Calc_Country_float2 - Country specific number calculation field 2

The [HrComp_Trans.Calc_Country_float2] field stores country specific calculation details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Calc_Country_float3 - Country specific number calculation field 3

The [HrComp_Trans.Calc_Country_float3] field stores country specific calculation details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CalculationDate - Calculation date

The [HrComp_Trans.CalculationDate] field stores the date on which the component was calculated. The value of this field can also be used to determine in which period in E-Account the component will be journalized when the payroll slip is final printed. The [HrComp_Trans.CalculationDate] in combination with the period-date table (the [Perdat] table) is used to retrieve the correct financial period. The calculation date is used for this purpose when no deviating entry date is entered in the journalizing screen.

Note! All lines in one entry for a resource should have the same date; otherwise the financial entry will not be balanced on the date.

Comp_Code - Component

The [HrComp_Trans.Comp_Code] field stores the code of the component that is used in the payroll calculation. The [HrComp_Trans.Comp_Code] field refers to the [HrComponents.Comp_Code] field.

Comp_Sub_Type - Component subtype

The [HrComp_Trans.Comp_Sub_Type] field stores the subtype of the component that is used in the payroll calculation. The subtype defines how a component behaves within the calculation and on overviews. The value of this field is copied from the [HrComponents.Comp_Sub_Type] field. The values used in the [HrComp_Trans.Comp_Sub_Type] field are country dependent. For more information see the Country specific section(s).

Comp_Type - Component type

The [HrComp_Trans.Comp_Type] field indicates the type of the component that is used in the payroll calculation. This field is used for general validations and selections on reports. The type of component is dependent on the relation this component is meant for. The value of the [HrComp_Trans.Comp_Type] field is copied from the [HrComponents.Comp_Type] field. The [HrComp_Trans.Comp_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
B	Bank accounts
D	Deduction
F	Financial components
R	Reservation
T	Tax
Y	Cost allocation

CompanyCode - Company code

The [HrComp_Trans.CompanyCode] field stores the code of the division for which the payroll calculation is made. The user cannot change this field. The value of the [HrComp_Trans.CompanyCode] field is retrieved from the [Humres.Comp] field. The [HrComp_Trans.CompanyCode] field refers to the [Bedryf.Bednr] field.

ComponentGuid - Component Guid

The [HrComp_Trans.ComponentGuid] field stores the unique ID of the resource specific component that is used in the payroll calculation. The [HrComp_Trans.ComponentGuid] field is copied from the [HrComp_Resource.ComponentGuid] field.

Contract - Contract

The [HrComp_Trans.Contract] field indicates if a component is linked to a contract. For components created during the calculation, the contract number must be filled. The [HrComp_Trans.Contract] field is copied from the [HrComp_Resource.Contract] field.

Note! This field is only used if a country uses the contract system in e-Payroll (currently only Spain, Germany and Austria). Per contract the sum of [HrComp_Trans.Amount_Cost] and the [HrComp_Trans.Amount_To_Be_Paid] column must be "0.0".

Country - Country

The [HrComp_Trans.Country] field stores the code of the country that is used in the payroll calculation. For one legislation, the country will always be the same. Per year / period / resource, the country must always be the same. The [HrComp_Trans.Country] field refers to the [Land.LandCode] field.

Country_char1 - Country specific character field 1

The [HrComp_Trans.Country_char1] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char2 - Country specific character field 2

The [HrComp_Trans.Country_char2] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char3 - Country specific character field 3

The [HrComp_Trans.Country_char3] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char4 - Country specific character field 4

The [HrComp_Trans.Country_char4] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char5 - Country specific character field 5

The [HrComp_Trans.Country_char5] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char6 - Country specific character field 6

The [HrComp_Trans.Country_char6] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char7 - Country specific character field 7

The [HrComp_Trans.Country_char7] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char8 - Country specific character field 8

The [HrComp_Trans.Country_char8] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_char9 - Country specific character field 9

The [HrComp_Trans.Country_char9] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float1 - Country specific number field 1

The [HrComp_Trans.Country_float1] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float2 - Country specific number field 2

The [HrComp_Trans.Country_float2] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float3 - Country specific number field 3

The [HrComp_Trans.Country_float3] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float4 - Country specific number field 4

The [HrComp_Trans.Country_float4] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float5 - Country specific number field 5

The [HrComp_Trans.Country_float5] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_float6 - Country specific number field 6

The [HrComp_Trans.Country_float6] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny1 - Country specific no / yes field 1

The [HrComp_Trans.Country_ny1] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny2 - Country specific no / yes field 2

The [HrComp_Trans.Country_ny2] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny3 - Country specific no / yes field 3

The [HrComp_Trans.Country_ny3] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny4 - Country specific no / yes field 4

The [HrComp_Trans.Country_ny4] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny5 - Country specific no / yes field 5

The [HrComp_Trans.Country_ny5] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny6 - Country specific no / yes field 6

The [HrComp_Trans.Country_ny6] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny7 - Country specific no / yes field 7

The [HrComp_Trans.Country_ny7] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny8 - Country specific no / yes field 8

The [HrComp_Trans.Country_ny8] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny9 - Country specific no / yes field 9

The [HrComp_Trans.Country_ny9] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny10 - Country specific no / yes field 10

The [HrComp_Trans.Country_ny10] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny11 - Country specific no / yes field 11

The [HrComp_Trans.Country_ny11] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny12 - Country specific no / yes field 12

The [HrComp_Trans.Country_ny12] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny13 - Country specific no / yes field 13

The [HrComp_Trans.Country_ny13] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny14 - Country specific no / yes field 14

The [HrComp_Trans.Country_ny14] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny15 - Country specific no / yes field 15

The [HrComp_Trans.Country_ny15] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny16 - Country specific no / yes field 16

The [HrComp_Trans.Country_ny16] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny17 - Country specific no / yes field 17

The [HrComp_Trans.Country_ny17] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_ny18 - Country specific no / yes field 18

The [HrComp_Trans.Country_ny18] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country_string1 - Country specific text field

The [HrComp_Trans.Country_string1] field stores country specific details for a payroll transaction. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Creditor - Creditor

The [HrComp_Trans.Creditor] field stores the creditor number linked to the resource specific component that is used in the payroll calculation. The value of this field is retrieved from the [HrComp_Resource.Creditor] field or the [HrComponents.Account] field if the [HrComp_Resource.Creditor] field is empty. If both fields are empty, then it is assumed that the component used in the payroll calculation is applicable for the creditor of the resource (the [Humres.Crdnr] field). The [HrComp_Trans.Creditor] field refers to the [Cicmpy.Crdnr] field and the [DivisionCreditors.Creditor] field.

Creditor_Account - General ledger account number

The [HrComp_Trans.Creditor_Account] field stores the general ledger account number on which the outstanding items will be created for the component used in the payroll calculation. The value of this field is retrieved from the [HrComp_Resource.Creditor_Account] field or the [HrComponents.Creditor_Account] field if the [HrComp_Resource.Creditor_Account] field is empty. The [HrComp_Trans.Creditor_Account] field refers to the [Grtbk.Reknr] field.

Note! The [HrComp_Trans.Creditor_Account] field is linked to the [HrComp_Trans.Amount_To_Be_Paid] field. The amount to be paid will be processed to the general ledger account number defined in the [HrComp_Trans.Creditor_Account] field.

Creditor_CostCenter - Cost center

The [HrComp_Trans.Creditor_CostCenter] field is not used.

Creditor_CostUnit - Cost unit

The [HrComp_Trans.Creditor_CostUnit] field is not used.

Currency - Currency

The [HrComp_Trans.Currency] field stores the currency in which the component is calculated. The value depends on the legislation and cannot be changed by the user. Per legislation only one currency can exist. The [HrComponents.Currency] field refers to the [Valuta.ValCode] field.

Note! The [HrComp_Trans.Currency] field is used to fill the [Amutas.ValCode] field during the financial processing.

Declaration_Date - Declaration date

The [HrComp_Trans.Declaration_Date] field stores the date on which a declaration has been made for this component (for example to the Tax Authority or Industrial Insurance Board). This field will only be filled if the [HrComp_Trans.Declaration_Made] field has value "1".

Declaration_Made - Declaration made

The [HrComp_Trans.Declaration_Made] field indicates whether or not a declaration has been made for this component (for example to the Tax Authority or Industrial Insurance Board). The value "0" indicates that no declaration is made; the value "1" indicates that a declaration has been made.

Declaration_Number - Declaration number

The [HrComp_Trans.Declaration_Number] field stores the number of the declaration that was made. This field will only be filled if the [HrComp_Trans.Declaration_Made] field has value "1".

Declaration_Period - Declaration period

The [HrComp_Trans.Declaration_Period] field stores the period for which a declaration is made. The frequency that a declaration is sent will be monthly or 4-weekly. Most of the time the declaration period will be equal to the payroll periods, but in the following cases this will be different from the payroll period and so it is necessary to store the declaration period separately:

- Payment period weekly: these resources will be declared per four weeks, so declaration period 1 will contain payroll period 1 until 4;
- Payment period quarterly: these resources will be declared per month but are paid per quarter. In this case the resource will be declared per month but the payroll transactions will be declared in each third period;
- Payment period daily: these resources will be declared per four weeks or per month.

Declaration_Sequence - Declaration sequence

The [HrComp_Trans.Declaration_Sequence] field stores an (internal) sequence number of a declaration. Since it is possible that more than one additional or correction declaration is created (for the same declaration period), this field is used to make a difference between the separate declarations.

Deviating_descr50 - Deviating description

The [HrComp_Trans.Deviating_descr50] field stores the deviating description of the component in the payroll calculation. The value of this field is retrieved from the [HrComp_Resource.Deviating_descr50] field. This description is printed on the payroll slips and used as description in the financial transactions.

Division - Division

The [HrComp_Trans.Division] field stores the division code. The [HrComp_Trans.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used at this moment. It is added for future functionality.

DocAttachmentID - Attachment ID

A user can add an attachment to the component during the payroll calculation. The attachment can contain additional information which is relevant to the component in the payroll calculation. The attachment can be any type of file, such as an Excel sheet, an image, or a Word document. Attachments are stored as documents in the [BacoDiscussions] table, which is the central document table. The system uses the attachment id field to store a unique reference to the document in the [BacoDiscussions] table. The [HrComp_Trans.DocAttachmentID] field refers to the [BacoDiscussions.ID] field.

Entry_Amount - Amount entered

The [HrComp_Trans.Entry_Amount] field stores the amount for the component that is entered during the payroll calculation. When payroll transactions are generated, the value of this field is copied from the [HrComp_Resource.Amount] field. When manually entering or modifying a component during the payroll calculation, the amount entered by the user is stored in the [HrComp_Trans.Entry_Amount] field. When the component is generated during calculation or when the [HrComp_Trans.Unit] field has the value "P", this field has the value "0". During the calculation, this field may not be changed (except for components created during the calculation) to prevent difficulties during recalculations.

Note! The [HrComp_Trans.Entry_Amount] field is only available if the [HrComp_Trans.Unit] field has the value "A".

Entry_Percentage - Percentage entered

The [HrComp_Trans.Entry_Percentage] field stores the percentage for the component that is entered during the payroll calculation. When payroll transactions are generated, the value of this field is copied from the [HrComp_Resource.Percentage] field. When manually entering or modifying a component during the payroll calculation, the percentage entered by the user is stored in the [HrComp_Trans.Entry_Percentage] field. When the component is generated during calculation or when the [HrComp_Trans.Unit] field has the value "A", this field has the value "0". During the calculation, this field may not be changed (except for components created during the calculation) to prevent difficulties during recalculations.

Note! The [HrComp_Trans.Entry_Percentage] field is only available if the [HrComp_Trans.Unit] field has the value "P".

Entryorigin - Origin

The [HrComp_Trans.Entryorigin] field stores the origin of the component that is used in the payroll calculation. The [HrComp_Trans.Entryorigin] field refers to the DDTests table which contains the following values for this field:

Value	Description	Remark
A	Absence	Not used
B	Budget	Not used
C	Conversion	Record originates from a conversion
E	Entered	Component was recalculated or added using the entry application
G	Generated	Component was generated during the calculation
I	Input	Component was generated using the generate entries application
P	Project	Not used
W	Retroactively	Records are created by the retroactive calculation

FormulaField - Formula

The [HrComp_Trans.FormulaField] field stores the formula of the component that is used in the payroll calculation. The value of this field is copied from the [HrComponents.FormulaField].

HourlyWage - Hourly wage

The [HrComp_Trans.HourlyWage] field stores the hourly wage for the component that is used in the payroll calculation. The value of the [HrComp_Trans.HourlyWage] field is copied from the [HrComp_Resource.HourlyWage] field.

ID - ID

The [HrComp_Trans.ID] field stores the system generated database record identification number. This field is not functionally used.

ItemCode - Item

The [HrComp_Trans.ItemCode] field is not used.

Ledger_Account - General ledger account number

The [HrComp_Trans.Ledger_Account] field stores the general ledger account number on which the costs and revenues will be booked for the component used in the payroll calculation. The value of this field is retrieved from the [HrComp_Resource.Ledger_Account] field or the [HrComponents.Ledger_Account] field if the [HrComp_Resource.Ledger_Account] field is empty.

Note! The [HrComp_Trans.Ledger_Account] field is linked to the [HrComp_Trans.Amount_Costs] field. The amount costs will be processed to the general ledger account number defined in the [HrComp_Trans.Ledger_Account] field.

Ledger_CostCenter - Cost center

The [HrComp_Trans.Ledger_CostCenter] field stores the cost center for which a payroll calculation is made. This field will be processed to the [Gbkmnt.KstplCode] field. The value of the [HrComp_Trans.Ledger_CostCenter] field is retrieved from the [HrComp_Resource.Ledger_CostCenter] field or the [Humres.CostCenter] field if the [HrComp_Resource.Ledger_CostCenter] field is empty. The [HrComp_Trans.Ledger_CostCenter] field refers to the [Kstpl.KstplCode] field.

Ledger_CostUnit - Cost unit

The [HrComp_Trans.Ledger_CostUnit] field stores the cost unit for which a payroll calculation is made. This field will be processed to the [Gbkmnt.KstdrCode] field. The value of the [HrComp_Trans.Ledger_CostUnit] field is retrieved from the [HrComp_Resource.Ledger_CostUnit] field. The [HrComp_Trans.Ledger_CostUnit] field refers to the [Kstdr.KstdrCode] field.

LocalCode - Local code

The [HrComp_Trans.LocalCode] field stores the city or community for which the component is used. The value of the [HrComp_Resource.LocalCode] is copied to this field.

Note! The [HrComp_Trans.LocalCode] field is only used in US legislation.

Notes - Notes

The user can add a note to a payroll calculation. Notes are stored as documents in the [BacoDiscussions] table, which is the central document table of Exact Globe and e-Synergy. The system uses the [HrComp_Trans.Notes] field to store a unique reference to the document in the [BacoDiscussions] table. The [HrComp_Trans.Notes] field refers to the [BacoDiscussions.ID] field.

Number - Number

The [HrComp_Trans.Number] field stores the quantity of the component used in the payroll calculation. During the payroll calculation, this quantity will be multiplied by the amount of the component (the [HrComp_Trans.Amount] field). The value of the [HrComp_Trans.Number] field is retrieved in the following way:

- If the [HrComponents.Origin] field equals "N", then the value is copied from the [HrComp_Resource.Number] field;
- If the [HrComponents.Origin] field equals "C", then the value is copied from the [Gbkmnt.Aantal] field of the MRS records within the period selected;
- If the [HrComponents.Origin] field equals "A" or "T", then the value is copied from the [Gbkmnt.Aantal] field of the realized labor hours linked to the component within the period selected

Note! Whether or not the [HrComp_Trans.Number] field is available for a component or not depends on the country. For more information see the Country specific section(s).

Number_Days_Absent - Number of days absent

The [HrComp_Trans.Number_Days_Absent] field is not used.

Number_Days_Component - Number of days for component

The [HrComp_Trans.Number_Days_Component] field stores the number of days that was used for this component during the payroll calculation. The value of this field is retrieved from MRP for the specific resource. This field can only be filled for components where the [HrComponents.Origin] field has the value "A" or "C". It is a distinct count on the field [Gbkmut.Datum].

Note! The [HrComp_Trans.Number_Days_Component] field is not functionally used.

Number_Days_Period - Number of days in period

The [HrComp_Trans.Number_Days_Period] field stores the number of days in the period for which a payroll calculation is made. The value of this field is retrieved in the following way:

- If the [HrComponents.Origin] field equals "N", then the value is copied from the [HrComp_Resource.Number_Days] field;
- If the [HrComponents.Origin] field equals "C", then the value is calculated from the count of the [Gbkmut.Datum] field of the MRS records within the period selected;
- If the [HrComponents.Origin] field equals "A", then the value is calculated from the count of the [Gbkmut.Datum] field of the realized labor hours linked to the component within the period selected.

OurReference - Our reference

The [HrComp_Trans.OurReference] field is not used.

Paid_By - Paid by

The [HrComp_Trans.Paid_By] field indicates who will pay the component. The value of this field is retrieved from the [HrComponents.Paid_By] field is copied to this field. Depending on the value of this field, the [HrComp_Trans.Amount_To_Be_Paid] field or the [HrComp_Trans.Amount_Costs] field or both fields will be filled. The [HrComp_Trans.Paid_By] field refers to the DDTests table which contains the following values for this field:

Value	Description
E	Employee
R	Employer

Payment_Period - Payment period

The [HrComp_Trans.Payment_Period] field stores the payment period of the component used in the payroll calculation. The value of this field is retrieved from the [HrComponents.Payment_Period] field. The value of this field will have effect on the [HrComp_Trans.Amount_Costs] and the [HrComp_Trans.Amount_To_Be_Paid] field (depending if it concerns a payment or not). The [HrComp_Trans.Payment_Period] field refers to the DDTests table which contains the following values for this field:

Value	Description	Remark
A	Half-yearly	Depending on the [HrComp_Trans.Comp_Sub_Type] field = country specific.
B	Bi-weekly	Depending on the [HrComp_Trans.Comp_Sub_Type] field = country specific.
D	Daily	The [HrComp_Trans.Entry_Amount] is multiplied by the number of days (the [HrComp_Trans.Number_Days_Period] field).
H	Hourly	The [HrComp_Trans.HourlyWage] field is multiplied by the [HrComp_Trans.Number] field.
M	Monthly	Depending on the [HrComp_Trans.Comp_Sub_Type] field = country specific.
O	Once-only	Depending on the [HrComp_Trans.Comp_Sub_Type] field = country specific.
P	Periodically	The value of the [HrPayroll.Payment_Period] field is copied
Q	Quarterly	Depending on the [HrComp_Trans.Comp_Sub_Type] field = country specific.
S	Semi monthly	Depending on the [HrComp_Trans.Comp_Sub_Type] field = country specific.
V	4-weekly	Depending on the [HrComp_Trans.Comp_Sub_Type] field = country specific.
W	Weekly	Depending on the [HrComp_Trans.Comp_Sub_Type] field = country specific.
Y	Yearly	Depending on the [HrComp_Trans.Comp_Sub_Type] field = country specific.

PayrollYear - Year

The [HrComp_Trans.PayrollYear] field stores the year for which a payroll calculation was made.

Period - Period

The [HrComp_Trans.Period] field stores the period for which a payroll calculation was made.

Priority - Priority

The [HrComp_Trans.Priority] field indicates which premium / tax components should be calculated first and which should be calculated after these first components during payroll calculation. The value of this field is copied from the [HrComp_Resource.Priority] field.

Note! The [HrComp_Trans.Priority] field is only available in US legislation.

Project - Project

The [HrComp_Trans.Project] field stores the project code which is linked to the component used in the payroll calculation. The value of this field is copied from the [HrComp_Resource.Project] field. The [HrComp_Trans.Project] field refers to the [PrProject.ProjectCode] field

ReferenceNr1 - Reference

The [HrComp_Trans.ReferenceNr1] field stores a reference number for the resource for a third party like the Tax Authority or the Social Security Organization (only when the social security number is not used there). Whether or not this field is available when linking a component to a resource is country dependent. The value of this field is copied from the [HrComp_Resource.ReferenceNr1] field. This field will be processed to the [Gbkmut.Betaalref] field. The [HrComp_Trans.ReferenceNr1] is used as payment reference in banking (the [BankTransactions.OffsetReference] field) if a general ledger account number of the type "Creditor account" is linked in the [HrComp_Trans.Ledger_Account] field or the [HrComp_Trans.Creditor_Account] field.

Note! The [HrComp_Trans.ReferenceNr1] field is only available in Dutch legislation.

ReferenceNr2 - Extra reference

The [HrComp_Trans.ReferenceNr2] field is not used.

Res_ID - Resource ID

The [HrComp_Trans.Res_ID] field stores the ID of the resource for which a payroll calculation is made. The [HrComp_Trans.Res_ID] field refers to the [Humres.Res_ID] field.

RunNumber - Run number

The [HrComp_Trans.RunNumber] field stores the number of the run of the payroll calculation. Each time payroll calculation records are calculated in a specific period for a specific resource, a new run number is assigned. For the first run the [HrComp_Trans.RunNumber] field will have the value "1"; for the second run, the value will be "2"; etc.

StateCode - State code

The [HrComp_Trans.StateCode] field stores the code of the state of the component used in the payroll calculation. The value of the [HrComp_Resource.StateCode] field is copied to this field.

Note! The [HrComp_Trans.StateCode] field is only used in German and US legislation.

Status - Status

The [HrComp_Trans.Status] field stores the calculation status of the component.

The [HrComp_Trans.Status] field refers to the DDTests table which contains the following values for this field:

Value	Description	Remark
A	Approved	Component is calculated and approved and ready to be processed (journalized to E-Account).
C	Calculated	Component is calculated, but not yet approved or processed (journalized to E-Account).
H	Historical	Component comes from a conversion from another package.
O	Open	Component is not yet calculated. This will only exist if a crash happened during a calculation.
P	Processed	Component is calculated, approved and processed (journalized to E-Account) and a final payroll slip has been printed.
R	Rejected	Component was rejected during calculation.
T	To be void	Component is going to be void after it was processed to E-Account. This is a temporary status and not visible to a user.
V	Void	Component was processed to E-Account, but later the component (or entry) was voided.
W	Correction	Correction entries that are created by the retroactive calculation. The entries with this status are stored in the period as individual amounts. The summarized components have the normal status.

Syscreated - Syscreated

The [HrComp_Trans.Syscreated] field stores the date and time when a payroll calculation was created. The system populates this field for all calculation lines.

Syscreator - Syscreator

The [HrComp_Trans.Syscreator] field stores the creator of a payroll calculation. The system populates this field for all calculation lines. The [HrComp_Trans.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [HrComp_Trans.SysGuid] field stores a unique identifier and is used for technical reasons only. It has no functional meaning. The system populates this field for all calculation lines.

Sysmodified - Sysmodified

The [HrComp_Trans.Sysmodified] field stores the date and time when a payroll calculation was last modified. Initially, this field contains the creation date. When a user modifies a payroll calculation, the date and time stored in the [HrComp_Trans.Sysmodified] field are changed to the date and time of modification. The system populates this field for all calculation lines.

Sysmodifier - Sysmodifier

The [HrComp_Trans.Sysmodifier] field stores the ID of the person who modified a payroll calculation. Initially, this field contains the creator ID. When a user modifies a payroll calculation, the modifier ID stored in the [HrComp_Trans.Sysmodifier] field is changed to the ID of the user who modified the payroll calculation. The system populates this field for all calculation lines. The [HrComp_Trans.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrComp_Trans.Timestamp] field is a technical field, which the SQL server triggers. The timestamp sorts the calculation lines in created or changed order. The system assigns a new timestamp for each new calculation line and updates the timestamp of the changed calculation lines.

Unit - Unit

The [HrComp_Trans.Unit] field indicates if the component is handled as an amount or a percentage. The value of this field is copied from the [HrComponents.Unit] field. If the component is handled as a percentage, the [HrComp_Trans.Entry_Percentage] field is filled; if the component is handled as an amount, the [HrComp_Trans.Entry_Amount] field is filled. The [HrComp_Trans.Unit] field refers to the DDTests table which contains the following values for this field:

Value	Description
A	Amount
P	Percentage

VoidDate - VoidDate

The [HrComp_VoidDate] field store the entry date entered by user when void/make correction to the processed entries.

YourReference - Your reference

The [HrComp_Trans>YourReference] field stores the reference that will be used on payment. This field will be processed to the [Gbkmut.DocNumber] field. This field will be filled with the following value:

"Y" + [HrComp_Trans.PayrollYear] + ":" + [HrComp_Trans.Period] + ":" + [HrComp_Trans.Res_ID] + " " + [HrComp_Trans.RunNumber]

Example: "Y2002:3:3400:2"

48.3 Country specific field details - Netherlands (NL)

Calc_country_float1 - Country specific number calculation field 1

The [HrComp_Trans.Calc_country_float1] field stores the average number of days (Dutch: 'gemiddeld aantal dagen loon') that is used in the calculation.

Calc_country_float2 - Country specific number calculation field 2

The [HrComp_Trans.Calc_country_float2] field stores the base value (Dutch: 'SV-loon') that is used in the calculation.

Calc_country_float3 - Country specific number calculation field 3

The [HrComp_Trans.Calc_country_float3] field stores the average hours that are used in the calculation.

Country_float1 - Country specific number field 1

The [HrComp_Trans.Country_float1] field stores the total or cumulative franchise. The value of the [HrComponents.Country_float1] field is copied to the [HrComp_Trans.Country_float1] field.

Country_float2 - Country specific number field 2

The [HrComp_Trans.Country_float2] field stores the total or cumulative maximum base value. The value of the [HrComponents.Country_float2] field is copied to the [HrComp_Trans.Country_float2] field.

48.4 Country specific field details - China (CN)

Cal_country_float1 - Fixed base value

The [HrComp_trans.Cal_country_float1] field stores the fixed base value for deduction. The [HrComp_trans.Cal_country_float1] field is available for social insurance and housing fund components with subtype "2000", "2100", "2200", "2300", "2400" and "2500" that are stored in the [HrComp_trans.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
2000	Pension insurance
2100	Unemployment insurance
2200	Medical insurance
2300	Maternity insurance
2400	Injury insurance
2500	Housing fund

Note! The [HrComp_trans.Cal_country_float1] field is enabled only if the [HrPayroll.CountryTest1] field is defined as fixed base value method. When the [HrComp_resource.Country_float1] field is defined with an amount, the [HrComp_trans.Cal_country_float1] field will calculate the fixed base value with that amount. The [HrComp_trans.Cal_country_float1] field will only calculate with the amount defined in the [HrPayroll.CountryFloat1] field when the [HrComp_resource.Country_float1] field is not filled with an amount.

Country_char1 - Prorate basis / hourly wage based on

The [HrComp_trans.Country_char1] field stores the prorate basis. The [HrComp_trans.Country_char1] field is available for components with subtype "1000", "1100", "1200", "1300", "1350", "1400" and "1500" that are stored in the [HrComp_trans.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime (Daily)
1300	Fixed allowance
1350	Variable allowance
1400	Gross deduction
1500	Net allowance

The [HrComp_trans.Country_char1] field can have one of the following values:

Value	Description	Remark
F	Fixed days	Denominator fixed for a component
W	Working days	Total working days for the period
C	Calendar days	Total days of the period

Note! The [HrComp_trans.Country_char1] field is filled only if the [HrComp_trans.Country_ny1] field identifies the prorate component is based on any of the payment frequencies except for daily, once only and hourly.

Country_char2 - Tax method

The [HrComp_trans.Country_char2] field stores the type of tax method. The [HrComp_trans.Country_char2] field is available for components with subtype "1100", "1300" and "1350" that are stored in the [HrComp_trans.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1300	Fixed allowance
1350	Variable allowance

The [HrComp_trans.Country_char2] field is also enabled if the [HrComp_trans.Country_ny1] field identifies the prorate component is based on the payment frequencies of once-only, monthly, quarterly, half-yearly and yearly. The [HrComp_trans.Country_char2] field can have one of the following values:

Value	Description	Remark
N	Normal	The tax amount is paid over every month
A	Average	The tax amount is paid over a few periods
I	Independent	The tax amount is paid once in every quarter
O	Once- only	The tax amount is paid once-only in full

Note! The [HrComp_trans.Country_char2] field stores the normal tax method if the [HrComp_trans.Payment_period] field is defined as once-only, monthly, quarterly, half-yearly and yearly.

The [HrComp_trans.Country_char2] field stores the average tax method if the [HrComp_trans.Payment_period] field is defined as quarterly, half-yearly and yearly.

The [HrComp_trans.Country_char2] field stores the independent tax method if the [HrComp_trans.Payment_period] field is defined as once-only, monthly, quarterly, half-yearly and yearly.

The [HrComp_trans.Country_char2] field stores the once-only tax method if the [HrComp_trans.Payment_period] field is defined as once-only and yearly.

Tax Method	Payment Period
Normal	once-only, monthly, quarterly, half-yearly and yearly
Average	quarterly, half-yearly and yearly
Independent	once-only, monthly, quarterly, half-yearly and yearly
Once-only	once-only and yearly

Country_char3 - Rounding

The [HrComp_trans.Country_char3] field stores the type of rounding method used for final amount calculation. The [HrComp_trans.Country_char3] field is filled for net salary components with all subtypes except subtype "4000" and "4100". The [HrComp_trans.Country_char3] field can have one of the following values:

Value	Description	Remark
N	None	No rounding
O	Normal	Normal rounding
U	Up	Rounding up
D	Down	Rounding down

Country_char4 - Precision

The [HrComp_trans.Country_char4] field stores the type of precision method used for calculation. The [HrComp_trans.Country_char4] field is available for components with all subtypes except subtype "4000" and "4100". The [HrComp_trans.Country_char4] field can have one of the following values:

Value	Description	Remark
A	0.01	2 decimal
B	0.10	1 decimal
C	1.00	0 decimal

Note! The [HrComp_trans.Country_char4] field is only filled if the rounding method is not defined as none in the [HrComp_trans.Country_char3] field.

Country_float1 - Denominator

The [HrComp_trans.Country_float1] field stores the divisor of the prorated amount. The [HrComp_trans.Country_float1] field is filled for components with subtype "1000", "1100", "1200", "1300", "1350", "1400", "1450" and "1500" that are stored in the [HrComp_trans.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime (Daily)
1300	Fixed allowance
1350	Variable allowance
1400	Gross deduction
1450	Net deduction
1500	Net allowance

Note! The [HrComp_trans.Country_float1] field is filled only if the [HrComp_trans.Country_char1] field indicate that the prorate basis is based on fixed days.

Country_float2 - Overtime rate

The [HrComp_trans.Country_float2] field stores the multiplier for the overtime hourly wage for the overtime component. The [HrComp_trans.Country_float2] field is only filled for component with subtype "1200" which is the Overtime (Daily) subtype.

Country_float3 - Fixed deduction

The [HrComp_trans.Country_float3] field stores the fixed deduction amount of social insurance calculation. The [HrComp_trans.Country_float3] field is filled for deduction with subtype "2000", "2100", "2200", "2250", "2300", "2400" and "2500" that are stored in the [HrComp_trans.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
2000	Pension insurance
2100	Unemployment insurance
2200	Medical insurance
2250	Supplementary Insurance
2300	Maternity insurance
2400	Injury insurance
2500	Housing fund

Country_float4 - Minimum base value

The [HrComp_trans.Country_float4] field stores the minimum base value for social insurance and housing fund. The [HrComp_trans.Country_float4] field can have one of the following values:

Value	Description
0	No minimum
Less than minimum value	No calculation
More than minimum value	Perform calculation

Country_float5 - Maximum base value

The [HrComp_trans.Country_float5] field stores the maximum base value for social insurance and housing fund. The [HrComp_trans.Country_float5] field can have one of the following values:

Value	Description
0	No limit
Less than maximum value	Take defined value as the base
More than maximum value	Take maximum value as the base

Country_float6 - Maximum contribution housing fund

The [HrComp_trans.Country_float5] field stores the maximum housing fund value contributed by the employee or employer. The [HrComp_trans.Country_float6] field is only filled for component with subtype "2500" which is the housing fund subtype.

Country_ny1- Prorate component

The [HrComp_trans.Country_ny1] field stores the value that indicate whether or not to perform prorate calculation. The [HrComp_trans.Country_ny1] field is only filled for components with subtype "1000", "1100", "1200", "1300", "1350", "1400", "1450" and "1500" that are stored in the [HrComp_trans.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime (Daily)
1300	Fixed allowance
1350	Variable allowance
1400	Gross deduction
1450	Net deduction
1500	Net allowance

The [HrComp_trans.Country_ny1] field can have one of the following values:

Value	Description
0	No - Do not perform prorate calculation
1	Yes - Perform prorate calculation

Note! The [HrComp_trans.Country_ny1] field is only filled if the prorate component is based on any of the frequencies except for daily, hourly and once-only. The [HrComponents.Country_ny1] field stores the "1" value if it is filled for component with subtype "1200". This enables the [HrComp_trans.Country_float1] field to use the [HrComp_trans.Country_char1] field to calculate the component overtime hourly wages.

Country_ny18 - Indicator

The [HrComp_trans.Country_ny18] field differentiate the current month salary and the previous month salary to perform difference calculation. The value '0' indicates it is the current month salary. The value '1' indicates it is a previous month salary. The current calculation is able to automatically include previous salary where resource joins after payroll process (payroll cut off date). This previous prorated salary amount will be used in the calculation of the current month salary. Two base salary transaction records are created to indicate the previous and current month salary. The [HrComp_trans.Country_ny18] field is only filled for component with subtype "1000" which is the base salary subtype.

Country_string1 - Employer reference number

The [HrComp_trans.Country_string1] field stores the employer reference number when the company declares the deduction components such as tax, social insurance and housing fund. The [HrComp_trans.Country_string1] field is filled for components with subtype "2000", "2100", "2200", "2250", "2300", "2400", "2500" and "3000" that are stored in the [HrComp_trans.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
2000	Pension insurance
2100	Unemployment insurance
2200	Medical insurance
2250	Supplementary Insurance
2300	Maternity insurance
2400	Injury insurance
2500	Housing fund
3000	Tax

48.5 Country specific field details - Malaysia (MY)**Cal_country_float1** - Calculation tax bonus

The [HrComp_Trans.Cal_Country_float1] field stores the EPF for a bonus to use in the PCB bonus calculation. The [HrComp_Trans.Cal_Country_float1] field is available for component with subtype "2100" and used during calculation for subtype "3000" (PCB).

Country_char1 - Prorate basis

The [HrComp_Trans.Country_char1] field defines the denominator for a prorate calculation. The [HrComp_Trans.Country_char1] field is available for components with subtype "1000", "1100", "1200" and "1300" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime
1300	Fixed allowance

The [HrComp_Trans.Country_char1] field can have one of the following values:

Value	Description	Remark
F	Fixed days	Denominator fixed for a component
W	Working days	Total working days for the period
C	Calendar days	Total days of the period

Note! The [HrComp_Trans.Country_char1] field is enabled only if the [HrComp_Trans.Country_ny1] field indicates that the prorate component is based on any of the payment frequencies except for daily, once-only and hourly for components with subtype "1000", "1100" and "1300".

Country_char2 - Prorate basis (Worked days)

The [HrComp_Trans.Country_char2] field stores the total actual worked days of a resource. The prorate basis is based on the working days or the calendar days. The [HrComp_Trans.Country_char2] field is available for components with subtype "1000", "1300" and only if the [HrComp_Trans.Country_ny1] field indicates that the prorate component is based on any of the frequencies except for daily, once-only and hourly. The [HrComp_Trans.Country_char2] field can have one of the following values:

Value	Description
W	Working days
C	Calendar

Country_float2 - Denominator

The [HrComp_Trans.Country_float2] field stores the fixed days in a month for calculating the prorated salary (for newly joined / resigned employee). The [HrComp_Trans.Country_float2] field is available for components with subtype "1000", "1100", "1200" and "1300" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime
1300	Fixed allowance

Note! The [HrComp_Trans.Country_float2] field is enabled only if the [HrComp_Trans.Country_char1] field indicates that the prorate basis is based on fixed days and must not be empty.

Country_float3 - Overtime rate

The [HrComp_Trans.Country_float3] field stores the multiplier for the overtime hourly wage for an overtime component. This field stores the overtime rate when a resource works overtime. The [HrComp_Trans.Country_float3] field is only available for components with subtype "1200".

Country_float4 - Print on EA form under code

The [HrComp_Trans.Country_float4] stores a value that indicates at which category / code the remuneration amount will be displayed on the respective statutory reports (EA form). The [HrComp_Trans.Country_float4] field is copied from the component (the [HrComponents.Country_float4] field). The [HrComp_Trans.Country_float4] field is only available for all the financial components with subtype "1000", "1100", "1200", "1300", and the non-monetary benefits (Benefit in Kind) component with subtype "2103".

Country_float5 - Print on CP21 form under code

The [HrComp_Trans.Country_float5] stores a value that indicates at which category / code, the remuneration amount will be displayed on the respective statutory reports (CP21 form). The [HrComp_Trans.Country_float5] field is copied from the component (the [HrComponents.Country_float5] field). The [HrComp_Trans.Country_float5] field allows company to declare to the Lembaga Hasil Dalam Negeri (LHDN) department when a resource is leaving the current country to work for another country.

Country_float6 - Overtime date

The [HrComp_Trans.Country_float6] field stores the overtime date of a resource who worked overtime. This field is also used to retrieve the correct basic salary amount to calculate the overtime wage. The [HrComp_Trans.Country_float6] field is only available for component with subtype "1200".

Country_ny1 - Prorate component

The [HrComp_Trans.Country_ny1] stores a value that indicate whether the component is a prorate component in order to perform a prorate calculation. This also determines whether to calculate the overtime hourly wages. The [HrComp_Trans.Country_ny1] field is available for components with subtype "1000", "1100", "1200" and "1300" stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Overtime
1300	Fixed allowance

The [HrComp_Trans.Country_ny1] field can have one of the following values:

Value	Description
0	No - Do not perform prorate calculation
1	Yes - Perform prorate calculation

Note! The [HrComp_Trans.Country_ny1] field is only enabled if the prorate component is based on any of the payment frequencies except for daily, hourly and once-only. The [HrComponents.Country_ny1] field stores the value "1" if it is filled for component with subtype "1200". This enables the [HrComp_Trans.Country_ny1] field to use the [HrComp_Trans.Country_char1] field to calculate the component overtime hourly wages.

Country_ny2 - EPF contribution

The [HrComp_Trans.Country_ny2] field stores a value that indicates if the payroll component has any EPF (Employee Provident Fund) contribution. The value "0" indicates it has no EPF contribution. The value "1" indicates that the component has an EPF contribution.

Country_ny3 - SOCSO contribution

The [HrComp_Trans.Country_ny3] field stores a value that indicates whether the payroll component has any SOCSO contribution. The value "0" indicates it has no SOCSO contribution. The value "1" indicates it has a SOCSO contribution.

Country_ny4 - Tax contribution

The [HrComp_Trans.Country_ny4] field stores a value that indicates if the payroll component has any tax contribution. The value "0" indicates it has no tax contribution. The value "1" indicates it has a tax contribution.

Country_ny18 - Indicator

The [HrComp_Trans.Country_ny18] field differentiates between the current month salary and the previous month salary to perform a difference calculation. The value "0" indicates it is the current month salary. The value "1" indicates it is a previous month salary. The current calculation is able to automatically include previous prorated salary where a resource joins after the payroll process (payroll cut off date). This previous prorated salary amount will be used in the calculation of the current month salary. Two base salary transaction records are created to indicate the previous and current month salary. The [HrComp_Trans.Country_ny18] field is only available for component with subtype "1000" which is the base salary subtype.

Country_string1 - Employer reference number

The [HrComp_Trans.Country_string1] field stores the employer reference number when company declares the deduction components such as EPF employer, SOCSO, tax employee, HRDF, Non-monetary benefits and CP38. The value in [HrComp_Trans.Country_string1] field is copied directly from [HrComponents.Country_string1] field, if it is filled.

Declaration_Date - PCB receipt date

The [HrComp_Trans.Declaration_Date] field stores the tax (PCB) receipt date to be displayed in the PCB2 form. The [HrComp_Trans.Declaration_Date] field is available for component with subtype "3000".

Declaration_Number - PCB receipt number

The [HrComp_Trans.Declaration_Number] field stores the tax (PCB) receipt number to be displayed in the PCB2 form and the CP159 form. The [HrComp_Trans.Declaration_Number] field is available for component with subtype "3000".

48.6 Country specific field details - Middle East (AE)

Country_char1 - Prorate basis / hourly wage base

The [HrComp_Trans.Country_char1] field stores the denominator for a prorate calculation. The [HrComp_Trans.Country_char1] field is available for components with subtype "1000", "1100", "1200", "1300", "1301", "1302", "1400" and "1950" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1000	Base salary
1100	Bonus
1200	Unpaid Leave
1300	Earning/deduction affect pension
1301	Earning/deduction affect provident fund
1302	Earning/deduction affect pension and provident fund
1400	Net earning/deduction
1950	Indemnity benefits

The [HrComp_Trans.Country_char1] field can have one of the following values:

Value	Description	Remark
F	Fixed days	Denominator fixed for a component
W	Working days	Total working days for the period
C	Calendar days	Total days of the period
U	User Defined	User defined the total days of a period

Note! The [HrComp_Trans.Country_char1] field is enabled only if the [HrComp_Trans.Country_ny1] field identified the prorate component is set to any of the payment frequencies except for daily, once only and hourly. The [HrComp_Trans.Country_char1] with value "U" (User Defined) is only applicable to components with subtype "1200".

Country_char2 - Profit/ loss base

The [HrComp_Trans.Country_char2] field stores the amount of the profit or loss from the provident fund which will be shared with the fund contributors. The [HrComp_Trans.Country_char2] field is available for components with subtype "1930" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
1930	Profit/loss from provident fund

The [HrComp_Trans.Country_char2] field can have one of the following values:

Value	Description	Remark
B	Fund balance	Profit/ loss calculated based on profit/ loss balance
P	Fund balance & Profit or Loss	Profit/ loss calculated based on profit/ loss balance and profit/ loss

Country_char3 - Deduction

The [HrComp_Trans.Country_char3] field stores the methods for the deduction of loan repayment. The [HrComp_Trans.Country_char3] field is available for components with subtype "1610", "1910" and "1951" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1610	Loan
1910	Provident fund loan
1951	Loan against indemnity benefits

The [HrComp_Trans.Country_char3] field can have one of the following values:

Value	Description	Remark	Application
C	Current period	Repay on the same month when a loan is released to resource	Components with subtype "1610", "1910", "1951"
N	Next period	Repay on the next month after a loan is released to resource	Components with subtype "1610", "1910", "1951"
S	With salary payments	Repay when there is a salary payment	Components with subtype "1610"
R	On resignation	Repay in the period that the resource last salary is calculated	Components with subtype "1951"

Country_char4 - Pension fund

The [HrComp_Trans.Country_char4] field stores the different types of pension funds. The [HrComp_Trans.Country_char4] field is available for components with subtype "2000" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following description:

Subtype	Description
2000	Pension/ social security employee

The [HrComp_Trans.Country_char4] field can have one of the following values:

Value	Description	Remarks	Note
B	Basic fund	The total pension amount is subject to a limit of 1250	If the total pension amount is lesser than the basic fund (limit to 1250), the calculated pension amount will be used. If the total pension amount is more than the basic fund, the maximum value of 1250 will be used.
T	Takmeeli fund	The total pension amount is subject to a limit of 2250	If the total pension amount is lesser than the Takmeeli fund (limit to 2250), the calculated pension amount will be used. If the total pension amount is more than the Takmeeli fund, the maximum value of 2250 will be used.
N	Normal fund	No limit on the total pension amount	Nil.

Country_float1 - Illness day 1/ overtime/ denominator

The [HrComp_Trans.Country_float1] field is shared to store the first range of illness day, overtime day or denominator. The [HrComp_Trans.Country_float1] field is available for components with subtype "1501", "1200" and "1950" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1200	Unpaid Leave
1501	Illness/ Illness repayment
1950	Indemnity benefits

- **Illness day 1:** The [HrComp_Trans.Country_float1] field stores the resources absent days for components is with subtype "1501". If the number of absent day is within the range specified in this field, the resource is entitled to a specific percentage of illness payment, depending on the first illness percentage (stored in the [HrComp_Trans.Country_float2] field). The [HrComp_Trans.Country_float1] field is the first of three fields that stores such data. The other fields are [HrComp_Trans.Country_float4] storing illness day 2 and [HrComp_Trans.Country_float6] storing illness day 3.
- **Overtime:** The [HrComp_Trans.Country_float1] field is used to store the overtime day or unpaid leave day for components with subtype "1200". This field stores the day when a resource works overtime or take unpaid leave.
- **Denominator:** The [HrComp_Trans.Country_float1] field is used to store denominator for components with subtype "1950". This field stores the number of days in a year for indemnity benefits calculation.

Country_float2 - Illness percentage 1/ overtime rate/ number of indemnity benefit days

The [HrComp_Trans.Country_float2] field is shared to store the first illness percentage, overtime rate or number of indemnity benefit days. The [HrComp_Trans.Country_float2] field is available for component with subtype "1200", "1501" and "1950" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1200	Unpaid leave
1501	Illness/ Illness repayment
1950	Indemnity benefits

- **Illness percentage 1:** The [HrComp_Trans.Country_float2] field is used to store the illness payment in percentage in relation to the illness days (the [HrComp_Trans.Country_float1] field) for component with subtype "1501". The illness payment is entitled to the resource in percentage when the resource actual absent days exceeds the number of days specified in the first range of illness days (stored in the [HrComp_Trans.Country_float1] field). The [HrComp_Trans.Country_float2] field is the first of three fields that stores such data. The other fields are [HrComp_Trans.Country_float3] storing illness percentage 2 and [HrComp_Trans.Country_float5] storing illness percentage 3.
- **Overtime rate:** The [HrComp_Trans.Country_float2] field is used to store the multiplier for the overtime hourly wage for components with subtype "1200". This field stores overtime rate when a resource works overtime. This field is available only if the component is paid by employer (where the [HrComp_Trans.Paid_By] field has the value "R").
- **Number of indemnity benefit days:** The [HrComp_Trans.Country_float2] field is used to store the number of indemnity benefit days if there are changes to the salary or allowance of a resource.

Note! The [HrComp_Trans.Country_float2] field is only available for component with subtype "1950" and only if the country code is set to "Kuwait" in the company data settings (where the [Bedryf.LandCode] field has the value "KW").

Country_float3 - Illness percentage 2/ minimum bonus/ EOSB service year 1

The [HrComp_Trans.Country_float3] field is shared to store the second illness percentage, minimum bonus amount or the first EOSB service year. The [HrComp_Trans.Country_float3] field is available for components with subtype "1100", "1501" and "1950" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1501	Illness/ Illness repayment
1950	Indemnity benefits

- **Illness percentage 2:** The [HrComp_Trans.Country_float3] field is used to store the illness payment in percentage in relation to the illness days (the [HrComp_Trans.Country_float4] field) for component with subtype "1501". The illness payment is entitled to the resource in percentage when the resource actual absent days exceeds the number of days specified in the second range of illness days (stored in the [HrComp_Trans.Country_float4] field). The [HrComp_Trans.Country_float3] field is the second of three fields that stores such data. The other fields are [HrComp_Trans.Country_float2] storing illness percentage 1 and [HrComp_Trans.Country_float5] storing illness percentage 3.
- **Minimum bonus:** The [HrComp_Trans.Country_float3] field is used to store the minimum bonus amount for calculation for component with subtype "1100". This field stores the minimum amount to validate whether the bonus value falls within the range for calculation.
- **EOSB service year 1:** The [HrComp_Trans.Country_float3] field is used to store the entitlement for End of Service Benefits (EOSB)/ indemnity benefits based on service year for components with subtype "1950". If the number of service years is greater than or equal to the amount specified in this field, the resource is entitled to a number of indemnity benefit days, indicated in the first range of indemnity benefit days (stored in the [HrComp_Trans.Country_float4] field). The [HrComp_Trans.Country_float3] field is the first of two fields that stores such data. The other field is [HrComp_Trans.Country_float5] storing EOSB service year 2.

Country_float4 - Illness day 2/ EOSB day 1

The [HrComp_Trans.Country_float4] field is shared to store the second range of illness days or the first range of indemnity benefit days. The [HrComp_Trans.Country_float4] field is available for components with subtype "1501" and "1950" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1501	Illness/ Illness repayment
1950	Indemnity benefits

- **Illness day 2:** The [HrComp_Trans.Country_float4] field is used to store the resources absent day for components with subtype "1501". The number of days in this field is used when the number of actual absent days exceeds the first range of illness days specified in the [HrComp_Trans.Country_float1] field. The resource is entitled to a specific percentage of illness payment, depending on the second illness percentage (stored in the [HrComp_Trans.Country_float3] field). The [HrComp_Trans.Country_float4] field is the second of three fields that stores such data. The other fields are [HrComp_Trans.Country_float1] storing illness day 1 and [HrComp_Trans.Country_float6] storing illness day 3.

- **EOSB day 1:** The [HrComp_Trans.Country_float4] field is used to store the entitlement of the indemnity benefit in days in relation to the service years for components with subtype "1950". This field calculates the indemnity benefit in days based on the first EOSB service year (stored in the [HrComponents.Country_float3] field).

Country_float5 - Illness percentage 3/ maximum bonus/ EOSB service year 2

The [HrComp_Trans.Country_float5] field is shared to store the third illness percentage, maximum bonus amount or the second EOSB service year. The [HrComp_Trans.Country_float5] field is available for component with subtype "1100", "1501" and "1950" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1501	Illness/ Illness repayment
1950	Indemnity benefits

- **Illness percentage 3:** The [HrComp_Trans.Country_float5] field is used to store the illness payment in percentage in relation to the illness days (the [HrComp_Trans.Country_float6] field) for components with subtype "1501". The illness payment is entitled to the resource in percentage when the resource absent days exceeds the third range of illness days (stored in the [HrComp_Trans.Country_float6] field). The [HrComp_Trans.Country_float5] field is the third of three fields that stores such data. The other fields are [HrComp_Trans.Country_float2] storing illness percentage 1 and [HrComp_Trans.Country_float3] storing illness percentage 2.
- **Maximum amount:** The [HrComp_Trans.Country_float5] field is used to store the maximum bonus amount for calculation for component with subtype "1100". This field stores the maximum amount to validate whether the bonus value fall within the range for calculation.
- **EOSB service year 2:** The [HrComp_Trans.Country_float5] field is used to store the entitlement for End of Service Benefits (EOSB)/ indemnity benefits based on service year for components with subtype "1950". If the number of service years is greater than or equal to the amount specified in this field, the resource is entitled to a number of indemnity benefit days, indicated in the second range of indemnity benefit days (stored in the [HrComp_Trans.Country_float6] field). The [HrComp_Trans.Country_float5] field is the second of two fields that stores such data. The other field is [HrComp_Trans.Country_float3] storing EOSB service year 1.

Country_float6 - Illness day 3/ Indemnity benefit amount for this period

The [HrComp_Trans.Country_float6] field is shared to store the third range of illness days and indemnity benefit amount for this period. The [HrComp_Trans.Country_float6] field is available for component with subtype "1501" and "1950" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1501	Illness/ Illness repayment
1950	Indemnity benefits

- **Illness day 3:** The [HrComp_Trans.Country_float6] field is used to store the resources absent days for components with subtype "1501". The number of days in this field is used when the number of absent days exceeds the second range of illness days specified in the [HrComp_Trans.Country_float4] field. The resource is entitled to a specific percentage of illness payment, depending on third illness percentage (stored in the [HrComp_Trans.Country_float5] field). The [HrComp_Trans.Country_float6] field is the third of three fields that stores such data. The other fields are [HrComp_Trans.Country_float1] storing illness day 1 and [HrComp_Trans.Country_float4] storing illness day 2.
- **Indemnity benefit amount for this period:** The [HrComponents.Country_float6] field is used to store the indemnity benefit amount for this period if there are any changes to the salary or allowance of a resource.

Note! The [HrComp_Trans.Country_float6] field is only available for component with subtype "1950" and only if the country code is set to "Kuwait" in the company data settings (where the [Bedryf.LandCode] field has the value "KW").

Country_ny1 - Prorate component

The [HrComp_Trans.Country_ny1] field indicates whether it is a prorate component in order to perform a prorate calculation. The [HrComp_Trans.Country_ny1] field is available for components with subtype "1100", "1200", "1300", "1301", "1302" and "1400" (stored in the [HrComp_Trans.Comp_Sub_Type] field). The component's subtype has the following descriptions:

Subtype	Description
1100	Bonus
1200	Unpaid Leave
1300	Earning/deduction affect pension
1301	Earning/deduction affect provident fund
1302	Earning/deduction affect pension and provident fund
1400	Net earning/deduction

The value "0" indicates the prorate component is not included for calculation. The value "1" indicates the prorate component is included for calculation.

Note! The [HrComp_Trans.Country_ny1] field is only enabled if the prorate component is based on any of the frequencies except for daily, hourly and once-only. The [HrComponents.Country_ny1] field stores the value "1" if it is filled for component with subtype "1200". This enables the [HrComponent.Country_ny1] field to use the [HrComponents.Country_char1] field to calculate the component overtime hourly wages.

Country_ny4 - Include excess in indemnity benefits

The [HrComp_Trans.Country_ny4] field indicates whether to include the excess of the pension amount in the calculation of indemnity benefits for components with subtype "2000" (stored in the [HrComp_Trans.Comp_Sub_Type] field). This field is normally used when a resource has a pension amount that exceeds the limit set by the fund (the [HrComp_Trans.Country_char4] field). The value "0" indicates that the excess in indemnity benefits is not included. The value "1" indicates the calculation of indemnity benefits will depend on the pension and the excess pension amount will be included in the base value for indemnity benefits.

Note! The [HrComp_Trans.Country_ny4] field is available for components with subtype "2000" only if the pension fund type is "Takmeeli" in the [HrComp_Trans.Country_char4] field.

Country_ny16 - Base salary/ vacation payment/ vacation deduction

The [HrComp_Trans.Country_ny16] field is shared to store the base salary, vacation payment amount or vacation deduction. The [HrComp_Trans.Country_ny16] field is available for components with subtype "1000", "1970" (stored in the [HrComp_Trans.Comp_Sub_Type] field) paid by employer (where the [HrComp_Trans.Paid_By] field has the value "R") and components with subtype "1970" paid by employee (where the [HrComp_Trans.Comp_Sub_Type] field has the value "E").

- **Base Salary:** The [HrComp_Trans.Country_ny16] field is used to store the base salary for components with subtype "1000". The value "1" indicates the [HrComp_Trans.Country_ny16] field will display the previous period salary. The value "0" indicates the [HrComp_Trans.Country_ny16] field will display the current period salary.
- **Vacation payment amount:** The [HrComp_Trans.Country_ny16] field is used to store the vacation payment amount for components with subtype "1970", which are paid by the employer. The value "1" indicates the [HrComp_Trans.Country_ny16] field will display the vacation payment amount for the current period. The value "0" indicates the [HrComp_Trans.Country_ny16] field will display the vacation payment amount for the next period.
- **Vacation deduction:** The [HrComp_Trans.Country_ny16] field is used to store the vacation deduction amount for components with subtype "1970" which are paid by the employee. The value "1" indicates the [HrComp_Trans.Country_ny16] field will display the vacation deduction amount for the previous period. The value "0" indicates the [HrComp_Trans.Country_ny16] field will display the vacation deduction amount for the current period.

Country_String1 - Employer reference number

The [HrComp_Trans.Country_string1] field stores the employer reference number when company declares the deduction components. The [HrComp_Trans.Country_string1] field is available if the component with subtype "2000" (stored in the [HrComp_Trans.Comp_Sub_Type] field).

Note! The [HrComp_Trans.Country_string1] field is enabled only if the components are paid by employer for components with subtype "2000" (Where the [HrComp_Trans.Paid_By] field has the value "R").



Chapter 49 | HrComponentItemLinks - Component relations

49. HrComponentItemLinks - Component relations

49.1 General description

The [HrComponentItemLinks] table is used to store N:M relations between components and other master data.

The type of relation (the [HrComponentItemLinks.Type] field) determines where the relation is used for:

- Type "R" is used in commission method components to retrieve revenue (so for components where the [HrComponents.Comp_Type] field has the value "P").
- Type "C" is used in commission method components to retrieve costs (so for components where the [HrComponents.Comp_Type] field has the value "P").
- Type "G" is used in grouping of components to link a component to a component group.
- Type "A" is used to link activities to components. The activities are items of type labor hour (so items where the [Items.Type] field has the value "L") and the components are components where the [HrComponents.Origin] field has the value "A", "T" or "C".

49.2 HrComponentItemLinks field details

Assortment - Assortment

The [HrComponentItemLinks.Assortment] field stores the code of the assortment where the revenue must be retrieved from. This field can only be filled if the [HrComponentItemLinks.Type] field has the value "R" which is only applicable for commission method components (so where the [HrComponents.Comp_Type] field has the value "P"). The [HrComponentItemLinks.Assortment] field refers to the [ItemAssortment.Assortment] field.

Comp_Code - Component

The [HrComponentItemLinks.Comp_Code] field stores the code of the component that was linked to the activity or item or assortment. It is possible to have 1 or more components linked to 1 or more activities.

Division - Division

The [HrComponentItemLinks.Division] field stores the division code. The [HrComponentItemLinks.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used at this moment. It is added for future functionality.

ID - ID

The [HrComponentItemLinks.ID] field stores the system generated database record identification number. This field is not functionally used.

ItemCode - Activity

The [HrComponentItemLinks.ItemCode] field stores the code of the item / activity that was linked to the component. The [HrComponentItemLinks.ItemCode] field refers to the [Items.ItemCode].

Ledger_Account - General ledger account number

The [HrComponentItemLinks.Ledger_Account] field stores the general ledger account number that is used to retrieve the revenue or costs for a commission method component. This field can only be filled if the [HrComponentItemLinks.Type] field has the value "R" or "C" which is only applicable for commission method components (so where the [HrComponents.Comp_Type] field has the value "P"). The [HrComponentItemLinks.Ledger_Account] field refers to the [Grtbk.Reknr] field.

PayrollComponent - Payroll component

The [HrComponentItemLinks.PayrollComponent] field stores the code of the component that is used to retrieve the costs for a commission method component. This field can only be filled if the [HrComponentItemLinks.Type] field has the value "C" which is only applicable for commission method components (so where the [HrComponents.Comp_Type] field has the value "P"). The [HrComponentItemLinks.PayrollComponent] field refers to the [HrComponents.Comp_Code] field.

RelCode - Relation code

The [HrComponentItemLinks.RelCode] field stores the code of the component group to which a component is linked. With a component group, it is possible to link multiple components (the components that are linked to a specific component group) to a resource in one step. This field can only be filled if the [HrComponentItemLinks.Type] field has the value "G". The [HrComponentItemLinks.RelCode] field refers to the [HrFree.RecKey] field where the [HrFree.FileType] has the value "CG".

Syscreated - Syscreated

The [HrComponentItemLinks.Syscreated] field stores the date and time when a component relation was created. The system populates this field for component relations.

Syscreator - Syscreator

The [HrComponentItemLinks.Syscreator] field stores the creator of a component relation. The system populates this field for all component relations. The [HrComponentItemLinks.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [HrComponentItemLinks.SysGuid] field stores a unique identifier and is used for technical reasons only. It has no functional meaning. The system populates this field for all component relations.

Sysmodified - Sysmodified

The [HrComponentItemLinks.Sysmodified] field stores the date and time when a component relation was last modified. Initially, this field contains the creation date. When a user modifies a component relation, the date and time stored in the [HrComponentItemLinks.Sysmodified] field are changed to the date and time of modification. The system populates this field for all component relations.

Sysmodifier - Sysmodifier

The [HrComponentItemLinks.Sysmodifier] field stores the ID of the person who modified a component relation. Initially, this field contains the creator ID. When a user modifies a component relation, the modifier ID stored in the [HrComponentItemLinks.Sysmodifier] field is changed to the ID of the user who modified the component relation. The system populates this field for all component relations. The [HrComponentItemLinks.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrComponentItemLinks.Timestamp] field is a technical field, which the SQL server triggers. The timestamp sorts the component relations in created or changed order. The system assigns a new timestamp for each new component relation and updates the timestamp of the changed component relation.

Type - Relation type

The [HrComponentItemLinks.Type] field indicates the type of the component relation.

The [HrComponentItemLinks.Type] field refers to the DDTests table which contains the following values for this field:

Value	Description	Remark
A	Activity	Relation between payroll components and activities (Items of type labor hour). To retrieve in E-Payroll hours and days for the payroll calculation. Key fields: Comp_Code and ItemCode.
C	Costs	Used for commission method components to store which general ledger account numbers and which payroll components must be used to retrieve the costs. Key fields: Comp_Code, Ledger_Account and PayrollComponent.
G	Group	Relation between a component group and components. Key fields: Comp_Code and Relcode.
R	Revenue	Used for commission method components to store which ledgers and which items or assortments must be used to retrieve the revenue. Key fields: Comp_Code, Ledger_Account, ItemCode and Assortment.

49.3 Commission method components

In the maintenance of a commission method component, it is possible to define links to the commission method component to retrieve revenue and costs.

For the link to retrieve revenue, it is possible to make a link to a G/L, to a G/L + Item or to a G/L + assortment. This data is used to calculate the revenue in the commission generator. The same combination of G/L, G/L + Item or G/L + assortment for a commission method component can only exist once.

For the link to retrieve costs, it is possible to make a link to a G/L or to a G/L + payroll component. This data is used to calculate the costs in the commission generator. The same combination of G/L or G/L + payroll component and commission method component can only exist once.



Chapter 50 | Resource payroll settings

50. Resource payroll settings

50.1 General description

The [HrPayroll] table stores the payroll settings per resource per year per period. These settings are used for the country specific payroll calculation. Per country, views exist with clear field names for the country specific functionality. The views are based on the field 'Country' and the field 'Type'. In section 6.2, the generic fields are described. For the country specific fields (view), see the Country specific section(s).

The [HrPayroll] table stores also other data besides the resource specific payroll settings. The type of the record (the [HrPayroll.Type] field) determines what kind of record it is:

- Type "N": Resource specific payroll settings. Only 1 record exists per resource / year / period.
- Type "C": Main contract data. The "C" and "P" records are linked to each other via the [HrPayroll.Contract] field. This functionality is only available in Spanish legislation at the moment. Multiple records can exist per resource / year / period.
- Type "P": Sub contract data (contract related data that can change during the contract). The "C" and "P" records are linked to each other via the [HrPayroll.Contract] field. Also referred to as Payroll data. This functionality is only available in Spanish legislation at the moment. Multiple records can exist per resource / year / period.

The type "C" and type "P" records are unique on the following fields:

- [HrPayroll.Res_ID]
- [HrPayroll.Type]
- [HrPayroll.StartDate]
- [HrPayroll.EndDate]

The type "N" records are unique on the following fields:

- [HrPayroll.Res_ID]
- [HrPayroll.PayrollYear]
- [HrPayroll.Period]

50.2 HrPayroll field details

Component_Group - Component group

The [HrPayroll.Component_Group] field stores the code of the component group that is linked to the resource (for that year / period). The components that are linked to this component group (which is stored in the [HrComponentItemLinks] table) will be linked to the resource (which is stored in the [HrComp_Resource] table). The [HrPayroll.Component_Group] field refers to the [HrFree.RecKey] field (where the [HrFree.FileType] field is "CG").

Contract - Contract

The [HrPayroll.Contract] field indicates the type of payroll data. For normal payroll data (where the [HrPayroll.Type] field has the value "N"), this field will have the value "0". For contract data (so where the [HrPayroll.Type] field has the value "C" or "P"), this field will have a value higher than "0". For the first contract, the value of this field will be "1". For each new contract line, the field [HrPayroll.Contract] field will be raised with 1.

Country - Country

The [HrPayroll.Country] field stores the code of the country for which the resource specific payroll settings were created. The [HrPayroll.Country] field refers to the [Land.LandCode] field.

Country15Char1 - Country specific length 15 character field 1

The [HrPayroll.Country15Char1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country15Char2 - Country specific length 15 character field 2

The [HrPayroll.Country15Char2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country15Char3 - Country specific length 15 character field 3

The [HrPayroll.Country15Char3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country30Varchar1 - Country specific length 30 character field 1

The [HrPayroll.Country30Varchar1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country30Varchar2 - Country specific length 30 character field 2

The [HrPayroll.Country30Varchar2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country30Varchar3 - Country specific length 30 character field 3

The [HrPayroll.Country30Varchar3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country70Varchar1 - Country specific length 70 character field 1

The [HrPayroll.Country70Varchar1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country70Varchar2 - Country specific length 70 character field 2

The [HrPayroll.Country70Varchar2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country70Varchar3 - Country specific length 70 character field 3

The [HrPayroll.Country70Varchar3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country8Char1 - Country specific length 8 character field 1

The [HrPayroll.Country8Char1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country8Char2 - Country specific length 8 character field 2

The [HrPayroll.Country8Char2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country8Char3 - Country specific length 8 character field 3

The [HrPayroll.Country8Char3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country8Char4 - Country specific length 8 character field 4

The [HrPayroll.Country8Char4] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country8Char5 - Country specific length 8 character field 5

The [HrPayroll.Country8Char5] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Country8Char6 - Country specific length 8 character field 6

The [HrPayroll.Country8Char6] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate1 - Country specific date field 1

The [HrPayroll.CountryDate1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate2 - Country specific date field 2

The [HrPayroll.CountryDate2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate3 - Country specific date field 3

The [HrPayroll.CountryDate3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate4 - Country specific date field 4

The [HrPayroll.CountryDate4] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate5 - Country specific date field 5

The [HrPayroll.CountryDate5] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate6 - Country specific date field 6

The [HrPayroll.CountryDate6] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate7 - Country specific date field 7

The [HrPayroll.CountryDate7] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate8 - Country specific date field 8

The [HrPayroll.CountryDate8] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate9 - Country specific date field 9

The [HrPayroll.CountryDate9] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate10 - Country specific date field 10

The [HrPayroll.CountryDate10] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate11 - Country specific date field 11

The [HrPayroll.CountryDate11] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate12 - Country specific date field 12

The [HrPayroll.CountryDate12] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate13 - Country specific date field 13

The [HrPayroll.CountryDate13] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate14 - Country specific date field 14

The [HrPayroll.CountryDate14] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate15 - Country specific date field 15

The [HrPayroll.CountryDate15] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate16 - Country specific date field 16

The [HrPayroll.CountryDate16] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate17 - Country specific date field 17

The [HrPayroll.CountryDate17] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate18 - Country specific date field 18

The [HrPayroll.CountryDate18] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate19 - Country specific date field 19

The [HrPayroll.CountryDate19] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate20 - Country specific date field 20

The [HrPayroll.CountryDate20] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate21 - Country specific date field 21

The [HrPayroll.CountryDate21] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate22 - Country specific date field 22

The [HrPayroll.CountryDate22] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat1 - Country specific decimal number field 1

The [HrPayroll.CountryFloat1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat2 - Country specific decimal number field 2

The [HrPayroll.CountryFloat2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat3 - Country specific decimal number field 3

The [HrPayroll.CountryFloat3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat4 - Country specific decimal number field 4

The [HrPayroll.CountryFloat4] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat5 - Country specific decimal number field 5

The [HrPayroll.CountryFloat5] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat6 - Country specific decimal number field 6

The [HrPayroll.CountryFloat6] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat7 - Country specific decimal number field 7

The [HrPayroll.CountryFloat7] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat8 - Country specific decimal number field 8

The [HrPayroll.CountryFloat8] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat9 - Country specific decimal number field 9

The [HrPayroll.CountryFloat9] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat10 - Country specific decimal number field 10

The [HrPayroll.CountryFloat10] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat11 - Country specific decimal number field 11

The [HrPayroll.CountryFloat11] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat12 - Country specific decimal number field 12

The [HrPayroll.CountryFloat12] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat13 - Country specific decimal number field 13

The [HrPayroll.CountryFloat13] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat14 - Country specific decimal number field 14

The [HrPayroll.CountryFloat14] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat15 - Country specific decimal number field 15

The [HrPayroll.CountryFloat15] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat16 - Country specific decimal number field 16

The [HrPayroll.CountryFloat16] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat17 - Country specific decimal number field 17

The [HrPayroll.CountryFloat17] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat18 - Country specific decimal number field 18

The [HrPayroll.CountryFloat18] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat19 - Country specific decimal number field 19

The [HrPayroll.CountryFloat19] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat20 - Country specific decimal number field 20

The [HrPayroll.CountryFloat20] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat21 - Country specific decimal number field 21

The [HrPayroll.CountryFloat21] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat22 - Country specific decimal number field 22

The [HrPayroll.CountryFloat22] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat23 - Country specific decimal number field 23

The [HrPayroll.CountryFloat23] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat24 - Country specific decimal number field 24

The [HrPayroll.CountryFloat24] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat25 - Country specific decimal number field 25

The [HrPayroll.CountryFloat25] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat26 - Country specific decimal number field 26

The [HrPayroll.CountryFloat26] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat27 - Country specific decimal number field 27

The [HrPayroll.CountryFloat27] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat28 - Country specific decimal number field 28

The [HrPayroll.CountryFloat28] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat29 - Country specific decimal number field 29

The [HrPayroll.CountryFloat29] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat30 - Country specific decimal number field 30

The [HrPayroll.CountryFloat30] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt1 - Country specific number field 1

The [HrPayroll.CountryInt1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt2 - Country specific number field 2

The [HrPayroll.CountryInt2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt3 - Country specific number field 3

The [HrPayroll.CountryInt3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes1 - Country specific no / yes field 1

The [HrPayroll.CountryNoYes1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes2 - Country specific no / yes field 2

The [HrPayroll.CountryNoYes2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes3 - Country specific no / yes field 3

The [HrPayroll.CountryNoYes3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes4 - Country specific no / yes field 4

The [HrPayroll.CountryNoYes4] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes5 - Country specific no / yes field 5

The [HrPayroll.CountryNoYes5] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes6 - Country specific no / yes field 6

The [HrPayroll.CountryNoYes6] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes7 - Country specific no / yes field 7

The [HrPayroll.CountryNoYes7] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes8 - Country specific no / yes field 8

The [HrPayroll.CountryNoYes8] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes9 - Country specific no / yes field 9

The [HrPayroll.CountryNoYes9] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes10 - Country specific no / yes field 10

The [HrPayroll.CountryNoYes10] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes11 - Country specific no / yes field 11

The [HrPayroll.CountryNoYes11] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes12 - Country specific no / yes field 12

The [HrPayroll.CountryNoYes12] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes13 - Country specific no / yes field 13

The [HrPayroll.CountryNoYes13] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes14 - Country specific no / yes field 14

The [HrPayroll.CountryNoYes14] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes15 - Country specific no / yes field 15

The [HrPayroll.CountryNoYes15] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes16 - Country specific no / yes field 16

The [HrPayroll.CountryNoYes16] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes17 - Country specific no / yes field 17

The [HrPayroll.CountryNoYes17] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes18 - Country specific no / yes field 18

The [HrPayroll.CountryNoYes18] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes19 - Country specific no / yes field 19

The [HrPayroll.CountryNoYes19] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes20 - Country specific no / yes field 20

The [HrPayroll.CountryNoYes20] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint1 - Country specific small number field 1

The [HrPayroll.CountrySmallint1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint2 - Country specific small number field 2

The [HrPayroll.CountrySmallint2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint3 - Country specific small number field 3

The [HrPayroll.CountrySmallint3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint4 - Country specific small number field 4

The [HrPayroll.CountrySmallint4] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint5 - Country specific small number field 5

The [HrPayroll.CountrySmallint5] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint6 - Country specific small number field 6

The [HrPayroll.CountrySmallint6] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint7 - Country specific small number field 7

The [HrPayroll.CountrySmallint7] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint8 - Country specific small number field 8

The [HrPayroll.CountrySmallint8] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint9 - Country specific small number field 9

The [HrPayroll.CountrySmallint9] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint10 - Country specific small number field 10

The [HrPayroll.CountrySmallint10] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint11 - Country specific small number field 11

The [HrPayroll.CountrySmallint11] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint12 - Country specific small number field 12

The [HrPayroll.CountrySmallint12] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint13 - Country specific small number field 13

The [HrPayroll.CountrySmallint13] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint14 - Country specific small number field 14

The [HrPayroll.CountrySmallint14] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint15 - Country specific small number field 15

The [HrPayroll.CountrySmallint15] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint16 - Country specific small number field 16

The [HrPayroll.CountrySmallint16] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint17 - Country specific small number field 17

The [HrPayroll.CountrySmallint17] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint18 - Country specific small number field 18

The [HrPayroll.CountrySmallint18] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint19 - Country specific small number field 19

The [HrPayroll.CountrySmallint19] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountrySmallint20 - Country specific small number field 20

The [HrPayroll.CountrySmallint20] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest1 - Country specific list box field 1

The [HrPayroll.CountryTest1] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest2 - Country specific list box field 2

The [HrPayroll.CountryTest2] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest3 - Country specific list box field 3

The [HrPayroll.CountryTest3] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest4 - Country specific list box field 4

The [HrPayroll.CountryTest4] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest5 - Country specific list box field 5

The [HrPayroll.CountryTest5] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest6 - Country specific list box field 6

The [HrPayroll.CountryTest6] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest7 - Country specific list box field 7

The [HrPayroll.CountryTest7] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest8 - Country specific list box field 8

The [HrPayroll.CountryTest8] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest9 - Country specific list box field 9

The [HrPayroll.CountryTest9] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest10 - Country specific list box field 10

The [HrPayroll.CountryTest10] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest11 - Country specific list box field 11

The [HrPayroll.CountryTest11] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest12 - Country specific list box field 12

The [HrPayroll.CountryTest12] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest13 - Country specific list box field 13

The [HrPayroll.CountryTest13] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest14 - Country specific list box field 14

The [HrPayroll.CountryTest14] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest15 - Country specific list box field 15

The [HrPayroll.CountryTest15] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest16 - Country specific list box field 16

The [HrPayroll.CountryTest16] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest17 - Country specific list box field 17

The [HrPayroll.CountryTest17] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest18 - Country specific list box field 18

The [HrPayroll.CountryTest18] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest19 - Country specific list box field 19

The [HrPayroll.CountryTest19] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest20 - Country specific list box field 20

The [HrPayroll.CountryTest20] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest21 - Country specific list box field 21

The [HrPayroll.CountryTest21] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest22 - Country specific list box field 22

The [HrPayroll.CountryTest22] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest23 - Country specific list box field 23

The [HrPayroll.CountryTest23] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest24 - Country specific list box field 24

The [HrPayroll.CountryTest24] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest25 - Country specific list box field 25

The [HrPayroll.CountryTest25] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest26 - Country specific list box field 26

The [HrPayroll.CountryTest26] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest27 - Country specific list box field 27

The [HrPayroll.CountryTest27] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest28 - Country specific list box field 28

The [HrPayroll.CountryTest28] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest29 - Country specific list box field 29

The [HrPayroll.CountryTest29] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest30 - Country specific list box field 30

The [HrPayroll.CountryTest30] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest31 - Country specific list box field 31

The [HrPayroll.CountryTest31] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest32 - Country specific list box field 32

The [HrPayroll.CountryTest32] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest33 - Country specific list box field 33

The [HrPayroll.CountryTest33] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest34 - Country specific list box field 34

The [HrPayroll.CountryTest34] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest35 - Country specific list box field 35

The [HrPayroll.CountryTest35] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest36 - Country specific list box field 36

The [HrPayroll.CountryTest36] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest37 - Country specific list box field 37

The [HrPayroll.CountryTest37] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest38 - Country specific list box field 38

The [HrPayroll.CountryTest38] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest39 - Country specific list box field 39

The [HrPayroll.CountryTest39] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest40 - Country specific list box field 40

The [HrPayroll.CountryTest40] field is used to store country specific resource payroll settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Description - Description

The [HrPayroll.Description] field stores the description of the contract related data (so where the [HrPayroll.Type] field has the value "C" or "P"). For contract related data, the default value of this field is "Contract". For payroll data, the default value of this field is "Payroll data".

Note! The [HrPayroll.Description] field is only available in Spanish legislation at the moment.

Division - Division

The [HrPayroll.Division] field stores the division code. The [HrPayroll.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used at this moment. It is added for future functionality.

DocAttachmentID - Attachment

A user can add an attachment to a contract (so where the [HrPayroll.Type] field has the value "C"). The attachment can contain additional information which is relevant to the contract. The attachment can be any type of file, such as an Excel sheet, an image, or a Word document. Attachments are stored as documents in the [BacoDiscussions] table, which is the central document table. The system uses the attachment id field to store a unique reference to the document in the [BacoDiscussions] table. The [HrPayroll.DocAttachmentID] field refers to the [BacoDiscussions.ID] field.

Note! The [HrPayroll.DocAttachmentID] field is only available in Spanish legislation.

EndDate - End date

The [HrPayroll.EndDate] field stores the end date of the payroll settings / contract data / payroll contract data.

- For payroll settings (where the [HrPayroll.Type] field has the value "N"), this field is filled with the last date of the period for which the payroll settings apply.
- For contract data (so where the [HrPayroll.Type] field has the value "C"), this field will be filled with the end date of the contract. Since contracts cannot overlap, the start date (the [HrPayroll.StartDate] field) is always more recent than the end date of the previous contract.
- For payroll contract data (so where the [HrPayroll.Type] field has the value "P"), this field will store the end date of the payroll contract data. Within a contract, the start date of the payroll contract data is always more recent than the end date of the previous payroll contract data.

ID - ID

The [HrPayroll.ID] field stores the system generated database record identification number. This field is not functionally used.

Job_Title - Job title

The [HrPayroll.Job_Title] field stores the job title that is related to the contract. This field is only available for contract data (so where the [HrPayroll.Contract] field has the value "C"). This field is default filled with the value of the [Humres.Job_Title] field. The [HrPayroll.Job_Title] field refers to the [Hrjbtl.Job_Title] field.

Payment_Period - Payment period

The [HrPayroll.Payment_Period] field stores the payment period of the resource. The [HrPayroll.Payment_Period] field can contain the following values for this field:

Value	Description
A	Half-yearly
D	Daily
M	Monthly
Q	Quarterly
V	4-weekly
W	Weekly
Y	Yearly

PayrollYear - Payroll year

The [HrPayroll.PayrollYear] field stores the payroll year to which the resource specific payroll settings apply. The value of this field has to lie between the highest and lowest payroll year (as defined in the settings).

Note! The [HrPayroll.PayrollYear] field is only used for payroll settings records (so where the [HrPayroll.Type] field has the value "N").

Period - Period

The [HrPayroll.Period] field stores the period to which the resource specific payroll settings apply.

Res_ID - Resource

The [HrPayroll.Res_ID] field stores the resource ID for which payroll settings or contract data is created. The [HrPayroll.Res_ID] field refers to the [Humres.Res_ID] field.

StartDate - Start date

The [HrPayroll.StartDate] field stores the start date of the payroll settings / contract data / payroll contract data.

- For payroll settings (where the [HrPayroll.Type] field has the value "N"), this field is filled with the first date of the period to which the payroll settings apply.
- For contract data (so where the [HrPayroll.Type] field has the value "C"), this field will be filled with the start date of the contract. Since contracts cannot overlap, the start date (the [HrPayroll.StartDate] field) is always more recent than the end date of the previous contract.
- For payroll contract data (so where the [HrPayroll.Type] field has the value "P"), this field will store the start date of the payroll contract data. Within a contract, the start date of the payroll contract data is always more recent than the end date of the previous payroll contract data.

Syscreated - Syscreated

The [HrPayroll.Syscreated] field stores the date and time when resource specific payroll settings / contract data / contract payroll data created. The system populates this field for all data.

Syscreator - Syscreator

The [HrPayroll.Syscreator] field stores the creator of the resource specific payroll settings / contract data / contract payroll data. The system populates this field for all data. The [HrPayroll.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [HrPayroll.SysGuid] field stores a unique identifier and is used for technical reasons only. It has no functional meaning. The system populates this field for all data.

Sysmodified - Sysmodified

The [HrPayroll.Sysmodified] field stores the date and time when resource specific payroll settings / contract data / contract payroll data was last modified. Initially, this field contains the creation date. When a user modifies this data, the date and time stored in the [HrPayroll.Sysmodified] field are changed to the date and time of modification. The system populates this field for all data.

Sysmodifier - Sysmodifier

The [HrPayroll.Sysmodifier] field stores the ID of the person who modified resource specific payroll settings / contract data / contract payroll data. Initially, this field contains the creator ID. When a user modifies this data, the modifier ID stored in the [HrPayroll.Sysmodifier] field is changed to the ID of the user who modified the data. The system populates this field for all data. The [HrPayroll.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrPayroll.Timestamp] field is a technical field, which the SQL server triggers. The timestamp sorts the data in created or changed order. The system assigns a new timestamp for each new resource specific payroll setting / contract data / contract payroll data and updates the timestamp of the changed resource specific payroll settings / contract data / contract payroll data.

Type - Type

The [HrPayroll.Type] field stores the type of the data. The resource specific payroll settings are stored as type "N". The types "C" (main contract related data) and "P" (sub contract related data) are used in German, Spanish and Austrian legislation.

The [HrPayroll.Type] field can contain the following values for this field:

Value	Description	Remark
C	Contract	Main contract related data
L	Log	Not used anymore
N	Normal	Resource specific payroll settings
P	Payroll data	Sub contract related data

50.3 Country specific field details - Netherlands (NL)

The resource specific payroll settings for the Netherlands, are stored in the country specific fields for own legislation. To have a better understanding of the fields that are used, a view is created (the [NLHrPayroll] view) with field names that indicate better what the field represents.

Field NLHrPayroll	Field HrPayroll
abp_dv_aard	CountryTest24
abp_dv_enddate	CountryDate3
abp_dv_startdate	CountryDate2
abp_dv_volgnr	CountrySmallint15
abp_dv_waarde	CountryTest25
abp_ptf_afw	CountryFloat16
abu_enddate	CountryDate6
abu_startdate	CountryDate5
abu_weeks_not_worked	CountrySmallint14
afw_bter_pf	CountryFloat13
annual_wage	CountryFloat12
bter_uurloon	CountryFloat24
bter_uurloon_excl	CountryFloat28
calc_days_week	CountryFloat18
calc_hours_week	CountryFloat19
calc_ptf	CountryFloat20
calc_ptf_method	CountryTest28
calc_svdays_method	CountryTest27
cd_agh	Country8Char6
cd_cao	CountryFloat21
cd_contract	Country8Char1
cd_fase_fz	Country8Char4
cd_ink_vermindering	CountryTest26
cd_redengeenbijtelling	CountryTest31
cd_zvw	CountryTest32
component_group	Component_group
contract	contract
corr_arb_verh	CountryTest33
country	Country

Field NLHrPayroll	Field HrPayroll
cvz_woonlandfactor	CountryFloat25
days_period	CountryFloat15
declaration_date	CountryDate7
declaration_lastaction	Laatste actie
declaration_made	CountryTest5
declaration_number	Country15Char1
declaration_period	CountrySmallInt3
declaration_reference	Country30Varchar1
declaration_sequence	CountrySmallInt4
declaration_type	CountryTest4
description	description
Division	Division
DocAttachmentID	DocAttachmentID
enddate	enddate
ID	ID
iv_dev_date	CountryNoYes16
iv_enddate	CountryDate9
iv_indication	CountrySmallInt17
iv_nummber	CountrySmallInt18
iv_startdate	CountryDate8
job_title	job_title
korting_levensloop	CountryFloat23
msv_cao_code	CountrySmallInt2
msv_change_ldate	CountryDate4
msv_declaration_type	CountryTest15
msv_hours_week	CountryFloat11
msv_labour_agreement	CountryNoYes6
msv_labour_code	CountryTest17
msv_labour_exception	Country8Char5
msv_labour_regular	CountryNoYes7
msv_loonsom	CountryFloat7
msv_own_risk_code	CountryTest20
msv_part_bps	CountryNoYes11
msv_part_obf	CountryNoYes9

Field NLHrPayroll	Field HrPayroll
msv_part_stein	CountryNoYes10
msv_part_vnps	CountryNoYes8
msv_premiumgrp_code	CountryTest19
msv_print	CountryNoYes5
msv_reduction_wa_code	CountryTest18
msv_resign_code	CountryTest16
msv_wao_percentage	CountrySmallint5
payment_period	payment_period
PayrollYear	PayrollYear
period	period
plo_ris_fonds	CountryNoYes14
reference_period	CountryFloat17
reference_year	CountryFloat22
res_id	res_id
sector	Country8Char2
slip_name_method	CountryTest29
sliptext1	Country70Varchar1
sliptext2	Country70VarChar2
sliptext3	Country70VarChar3
soc_bter_days	CountryFloat14
soc_leerling	CountryTest23
soc_type_line	CountryTest22
soc_UTA	CountryNoYes15
soc_wao_type	CountryTest13
soc_ww_type	CountryTest11
soc_zfw_type	CountryTest14
soc_zw_type	CountryTest12
startdate	startdate
subsector	Country8Char3
syscreated	syscreated
syscreator	syscreator
sysguid	sysguid
sysmodified	sysmodified
sysmodifier	sysmodifier

Field NLHrPayroll	Field HrPayroll
tax_beschikking_amount	CountryFloat5
tax_exception_type	CountryTest9
tax_extra_amount	CountryFloat1
tax_extra_type	CountryTest2
tax_franchise	CountryTest10
tax_income_code	CountrySmallint1
tax_lagelonen_type	CountryTest6
tax_payment	CountryNoYes1
tax_percentage_rule	CountryFloat6
tax_rebate_elderly	CountryNoYes2
tax_rebate_ldate	CountryDate1
tax_rebate_type	CountryTest3
tax_rebate_young_disab	CountryNoYes3
tax_reduction_type	CountryTest8
tax_special_percentage	CountryFloat3
tax_special_yearlywage	CountryFloat2
tax_table_color	CountryTest1
tax_use_daily	CountryTest30
tax_vermindering_type	CountryTest7
tax_vermindering_uren	CountryFloat4
tax_vermindering_vastbedrag	CountryFloat26
tax_voordeelregel	CountryNoYes4
timestamp	timestamp
tsf_dagen_opg	CountryFloat27
type	type
ydec_b_amount	CountryInt3
ydec_bpf_code	CountrySmallint9
ydec_comp_car	CountryNoYes13
ydec_government	CountryNoYes12
ydec_payment_amt	CountryInt1
ydec_payment_days	CountrySmallint6
ydec_payment_wao	CountryInt2
ydec_special_amount1	CountryFloat8
ydec_special_amount2	CountryFloat9

Field NLHrPayroll	Field HrPayroll
ydec_special_amount3	CountryFloat10
ydec_special_code1	CountrySmallint11
ydec_special_code2	CountrySmallint12
ydec_special_code3	CountrySmallint13
ydec_special_sv_code	CountrySmallint8
ydec_vrijst_code	CountryTest21
ydec_vut_code	CountrySmallint10
ydec_year_hours	CountrySmallint7

Note! Only the records where the [HrPayroll.Type] field has the value "N" and the [HrPayroll.Country] field has the value "NL" are used in the [NLHrPajyroll] view.

Abp_dv_aard - Nature of employment (Aard dienstverband)

The [NLHrPayroll.Abp_dv_aard] field stores the nature of the employment. This field is used for the declaration to the ABP (Algemeen Burgerlijk Pensioenfonds), which is the pension fund of the government organizations or government related companies ("semi-overheid") and maintain a number of regulations. The [NLHrPayroll.Abp_dv_aard] field can contain the following values:

Value	Description
A	Voormalig werknemer met ontslaguitkering
B	Voormalig werknemer met functioneel leeftijdsontslag
C	Voormalig werknemer met VUT of FPU uitkering
D	Voormalig werknemer met suppletie
E	Verlof wegens politieke functie
F	Verlof wegens functie bij EG, NAVO e.d.
G	Verlof wegens militaire functie
H	Verlof wegens functie op de Nederlandse Antillen
I	Verlof wegens functie ombudsman
J	Verlof alle andere situaties
K	Voormalig werknemer met overgangsrecht WW-uitkering (available as from 2007)
L	Voormalig werknemer met WW-uitkering (available as from 2007)
W	Werknemer

Abp_dv_EndDate - End date participation (Einddatum deelnemerschap)

The [NLHrPayroll.Abp_dv_aard] field stores the end date of the participation of the employee to the ABP fund. This field is used for the declaration to the ABP (Algemeen Burgerlijk Pensioenfonds), which is the pension fund of the government organizations or government related companies (semi-overheid) and maintain a number of regulations.

Abp_dv_StartDate - Start date participation (Begindatum deelnemerschap)

The [NLHrPayroll.Abp_dv_aard] field stores the start date of the participation of the employee to the ABP fund. This field is used for the declaration to the ABP (Algemeen Burgerlijk Pensioenfonds), which is the pension fund of the government organizations or government related companies (semi-overheid) and maintain a number of regulations.

Abp_dv_volgnr - Participant number (Volgnummer deelnemer)

The [NLHrPayroll.Abp_dv_volgnr] field stores the participant number of the employee of the ABP fund. This field is used for the declaration to the ABP (Algemeen Burgerlijk Pensioenfonds), which is the pension fund of the government organizations or government related companies (semi-overheid) and maintain a number of regulations.

Abp_dv_Waarde - (Waarde deelnemerschap)

The [NLHrPayroll.Abp_dv_Waarde] field indicates how the seniority is included in the calculation of the ABP premium. This field is also used for the declaration to the ABP (Algemeen Burgerlijk Pensioenfonds), which is the pension fund of the government organizations or government related companies (semi-overheid) and maintain a number of regulations.

Value	Description
0	100: de diensttijd telt volledig mee
1	050: de diensttijd telt voor de helft mee
2	000: de diensttijd telt niet mee
3	038: de diensttijd telt voor 37,5% mee (available as from 2007)

Abp_ptf_afw - Part-time factor new function / leave (Deeltijdfactor nieuwe betrekking/Deeltijdfactor verlof)

The [NLHrPayroll.Abp_dv_afw] field stores the part-time factor of the new function or leave for the calculation of the ABP premium. This field is also used for the declaration to the ABP (Algemeen Burgerlijk Pensioenfonds), which is the pension fund of the government organizations or government related companies (semi-overheid) and maintain a number of regulations. If the "Nature of employment" (the [NLHrPayroll.Abp_dv_aard] field) has the value "A" or "D", then this field is enabled with the label "Deeltijdfactor andere betrekking". If the "Nature of employment" (the [NLHrPayroll.Abp_dv_aard] field) has the value "E", then this field is enabled with the label "Deeltijdfactor verlof".

ABU_EndDate - ABU End date (Einddatum wekentelling)

The [NLHrPayroll.ABU_EndDate] field stores the end date of the weeks not worked. This data is needed for specific calculations for the CAO ABU (Algemene Bond Uitzendondernemingen).

ABU_StartDate - ABU Start date (Begindatum wekentelling)

The [NLHrPayroll.ABU_StartDate] field stores the start date of the weeks not worked. This data is needed for specific calculations for the CAO ABU (Algemene Bond Uitzendondernemingen).

ABU_Weeks_Not_Worked - ABU weeks not worked (Aantal weken niet gewerkt)

The [NLHrPayroll.ABU_Weeks_Not_Worked] field stores the number of the weeks not worked. This data is needed for specific calculations for the CAO ABU (Algemene Bond Uitzendondernemingen).

Afw_BTER_pf - Deviating BTER base pension fund (Afwijkende BTER grondslag pensioenfonds)

The [NLHrPayroll.Afw_BTER_pf] field stores a deviating BTER (Bedrijfstak eigen regeling) base value. This field is used to declare a deviating base value of the pension fund for the UWV SFB.

Annual_Wage - Gross annual wage (Bruto jaarloon)

The [NLHrPayroll.Annual_Wage] field stores the gross annual wage. This field is used for various premium calculations like PGGM and ABP.

BTER_uurloon - (BTER uurloon)

The [NLHrPayroll.BTER_uurloon] field stores the BTER hourly wage that is calculated by the Dutch payroll calculation. Holiday allowance is included in the calculated amount. This hourly wage is written in the declaration (OLP).

BTER_uurloon_excl - (BTER uurloon exclusief)

The [NLHrPayroll.BTER_uurloon] field stores the BTER hourly wage that is calculated by the Dutch payroll calculation. Holiday allowance is not included in the calculated amount. This hourly wage is written in the declaration (OLP).

Calc_Days_Week - SV days per week (SV dagen per week)

The [NLHrPayroll.Calc_Days_Week] field stores the number of SV days per week of the employee. The SV days per week are used to calculate several premiums like WW, ZW and ZFW. The [NLHrPayroll.Calc_Days_Week] field is only available if the [NLHrPayroll.Calc_svdays_Method] field has the value "V".

Calc_Hours_Week - SV hours per week (SV uren per week)

The [NLHrPayroll.Calc_Hours_Week] field stores the number of SV hours per week of the employee. The SV hours per week are used to calculate several premiums like WW, ZW and ZFW. The [NLHrPayroll.Calc_Hours_Week] field is only available if the [NLHrPayroll.Calc_svdays_Method] field has the value "V".

Calc_ptf - Part-time factor (Deeltijdfactor)

The [NLHrPayroll.Calc_ptf] field stores the part-time factor of the employee. The part-time factor is used to calculate several premiums. The [NLHrPayroll.Calc_ptf] field is only available if the [NLHrPayroll.Calc_ptf_Method] field has the value "V".

Calc_ptf_Method - Calculation part-time factor (Berekening deeltijdfactor)

The [NLHrPayroll.Calc_ptf_Method] field indicates what method is used in order to calculate the part-time factor that is used within the payroll calculation. When this field is set to 'A', the part-time factor is calculated automatically by the payroll calculation by dividing the number of hours per day from the employees workschedule and the number of hours per day from the component concerned (the [HrComponents.Country_float9] field). When this field is set to 'V', the part-time factor that is used by the payroll calculation is the part-time factor that is filled in the [NLHrPayroll.Calc_ptf] field for that employee and period. The [NLHrPayroll.Calc_ptf_Method] field refers to the DDTests table which contains the following values for this field:

Value	Description
A	Automatically
V	Vaste waarde gebruiken

Calc_svdays_Method - Calculation SV days and SV hours (Berekening SV dagen / uren)

The [NLHrPayroll.Calc_svdays_Method] field indicates if the SV days and SV hours should be calculated automatically or fixed values should be used. The [NLHrPayroll.Calc_svdays_Method] field refers to the DDTests table which contains the following values for this field:

Value	Description
A	Automatically
V	Vaste waarde gebruiken

Cd_agh - Code for disabled discount (Code arbeidsgehandicaptenkorting)

The [NLHrPayroll.Cd_agh] field stores the code for disabled discount in declaration. The possible values are:

Value	Description
0	Niet van toepassing
1	In dienst genomen jonggehandicapte
2	Herplaatste jonggehandicapten
3	In dienst genomen arbeidsgehandicapte
4	Herplaatste arbeidsgehandicapte

Cd_cao - (Code CAO)

The [NLHrPayroll.Cd_cao] field stores the code CAO, which is the code for tax authority in declaration.

Note! The available CAOs are selected from a CSV file.

Cd_contract - (Code contract)

The [NLHrPayroll.Cd_contract] field stores the contract code. The possible values are:

Value	Description
B	Bepaald
O	Onbepaald
V	Contractgegevens

Cd_fase_fz - (Code fase indeling)

The [NLHrPayroll.Cd_fase_fz] field stores the category code in which the temporary worker belongs to. The possible values are:

Value	Description
0	Niet van toepassing
1	Fase 1
2	Fase 2
3	Fase 3
4	Fase 4
5	Wettelijk regime
6	Ketensysteem
17	Fase A
18	Fase B
19	Fase C
38	Fase A (zonder beding/loonuitsluiting)
40	Fase A (zonder beding)
41	Fase 1 (zonder beding)
42	Fase 2 (zonder beding)
99	Contractgegevens

Cd_ink_Vermindering - (Code inkomstenvermindering)

The [NLHrPayroll.Cd_ink_Vermindering] field indicates if the salary is reduced this period. The [NLHrPayroll.Cd_ink_Vermindering] field refers to the DDTests table which contains the following values for this field:

Value	Description
B	Bevalling of zwangerschap
N	Niet van toepassing
O	Onbetaald verlof
Z	Ziekte

Note! The [NLHrPayroll.Cd_ink_Vermindering] field will be used to register declaration data for the new tax declaration as from 2006.

Cd_redengeenbijtelling - (Code redden geen bijtelling auto)

The [NLHrPayroll.Cd_redengeenbijtelling] field stores the code to tax exemption. The possible values are:

Value	Description
0	Niet van toepassing
1	Afspraak via werkgever met belastingdienst
2	Werknemer heft beschikking belastingdienst (only available for 2006)
	Verklaring geen prive gebruik auto (available as from 2007)
3	Ander bewijs
4	Bwstelauto zonder prive gebruik (only available for 2006)
5	Doorlopen afwisselend gebruik bestelauto (available as from 2007)

Note! This field is made available as from 2006 and it is enabled when the [NLHrPayroll.ydec_comp_car] field = '1'.

Cd_zvw - (Code verzekeringssituatie ZVW)

The [NLHrPayroll.Cd_zvw] field stores the insurance situation of the resource for ZVW. The possible values are:

Value	Description
A	Niet verzekeringsplichtig
B	Niet verzekeringsplichtig (militair)
C	Verzekeringsplichtig (normaal tarief)
D	Verzekeringsplichtig (zeelieden)
E	Verzekeringsplichtig (verlaagd tarief)
F	Verzekeringsplichtig (meerdere tarieven)
G	Niet verzekeringsplichtig (Buitenlands artiest/sporter) (available as from 2007)
H	Verzekeringsplichtig (Binnenlands artiest) (available as from 2007)
I	Niet verzekeringsplichtig (Bijdrage CVZ) (available as from 2007)

Note! This field is made available as from 2006.

Component_Group - Component group

The [NLHrPayroll.Component_Group] field has the same functionality as the [HrPayroll.Component_Group] field.

Contract - Contract

The [NLHrPayroll.Contract] field has the same functionality as the [HrPayroll.Contract] field.

Corr_arb_verh - (Type correctie OLP)

The [NLHrPayroll.Corr_arb_verh] field stores the correction type for OLP in tax (Cordares) declaration. The possible values are:

Value	Description
0	Niet van toepassing
2	Vervangende regel (inclusief levensloop)
3	Vervangende regel (exclusief levensloop)

Country - Country

The [NLHrPayroll.Country] field has the same functionality as the [HrPayroll.Country] field.

Cvz_woonlandfactor - (Wonnlandfactor CVZ)

The [NLHrPayroll.Cvz.woonlandfactor] field stores the country factor in CVZ. This country factor was introduced due to change of the calculation for foreign pension takers. The foreign pension takers must pay a contribution to the college for health insurances in the Netherlands (CVZ). Depending on the country where the pension taker lives, the contribution is multiplied with a country depended factor. This factor can only be entered if the [NLHrPayroll.Soc_ZFW_Type] field = ['X', 'Y'].

Note! This field is made available as from 2007.

Days_Period - Days per period (Dagen per periode)

The [NLHrPayroll.Days_Period] field stores the deviating number of days per period of the employee if the work schedule does not return the correct data.

Declaration_Date - Declaration date

The [NLHrPayroll.Declaration_Date] field stores the date and time the declaration was created.

Note! The [NLHrPayroll.Declaration_Date] field will be used to register declaration data for the new tax declaration as from 2006.

Declaration_lastaction - Laatste actie

The [NLHrPayroll.Declaration_lastaction] field is not used anymore.

Declaration_Made - Declaration made (Type correctie Loonaangifte)

The [NLHrPayroll.Declaration_Made] field stores the correction type for Loonaangifte in tax declaration. The [NLHrPayroll.Declaration_Made] field refers to the DDTests table which contains the following values:

Value	Description
0	Niet van toepassing
1	Correctie
2	Intrekking

Note! The [NLHrPayroll.Declaration_Made] field will be used to register declaration data for the new tax declaration as from 2006.

Declaration_Number - Declaration number

The [NLHrPayroll.Declaration_Number] field stores the number of the tax declaration.

Note! The [NLHrPayroll.Declaration_Number] field will be used to register declaration data for the new tax declaration as from 2006.

Declaration_Period - Declaration period

The [NLHrPayroll.Declaration_Period] field stores the period for which the tax declaration is created. The frequency that a tax declaration is sent will be monthly or 4-weekly. Most of the time the declaration period will be equal to the payroll payment period, but in a few cases this will be different:

- Payment period weekly: these resources will be declared per four weeks.
- Payment period quarterly: these resources will be declared per month.
- Payment period daily: these resources will be declared per four weeks or per month.

Note! The [NLHrPayroll.Declaration_Period] field will be used to register declaration data for the new tax declaration as from 2006.

Declaration_Reference - Declaration reference

The [NLHrPayroll.Declaration_Reference] field stores the unique reference for the tax declaration. This field will be used to link the different data like payroll data, payroll transactions, documents and payments. This field will also be used in the communication between the tax department and the company. The reference will consist of the following data: "Loonbelastingnummer" + "Document number" and will also be stored in the created XML-file for the declaration.

Note! The [NLHrPayroll.Declaration_Reference] field will be used to register declaration data for the new tax declaration as from 2006.

Declaration_Sequence - Declaration sequence

The [NLHrPayroll.Declaration_Sequence] field stores the sequence number of the declaration. The sequence number is used to make a difference between the separate declarations made, since it is possible that more than one additional or correction declaration is created.

Note! The [NLHrPayroll.Declaration_Sequence] field will be used to register declaration data for the new tax declaration as from 2006.

Declaration_Type - Declaration type

The [NLHrPayroll.Declaration_Type] field stores the type of declaration. The [NLHrPayroll.Declaration_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
0	N.v.t.
1	Correctie
2	Intrekking

Note! The [NLHrPayroll.Declaration_Type] field will be used to register declaration data for the new tax declaration as from 2006.

Description - Description

The [NLHrPayroll.Description] field has the same functionality as the [HrPayroll.Description] field.

Division - Division

The [NLHrPayroll.Division] field stores the division number of the division. The [NLHrPayroll.Division] field stores the numeric value of the [Bedryf.Bednrnr] field. The [NLHrPayroll.Division] field is added for future functionality.

DocAttachmentID - Attachment

The [NLHrPayroll.DocAttachmentID] field has the same functionality as the [HrPayroll.DocAttachmentID] field.

EndDate - End date

The [NLHrPayroll.EndDate] field stores the end date of the payroll settings. This field is filled with the last date of the period for which the payroll settings apply.

ID - ID

The [NLHrPayroll.ID] field stores the system generated database record identification number. This field is not functionally used.

lv_dev_date - Derogatory date (Afwijkende datum)

The [NLHrPayroll.lv_dev_date] field indicates if the start and end date of the 'Inkomstenverhouding' deviates from the start and end date of the resource. The value "1" indicates that the start and end date of the 'Inkomstenverhouding' deviates from the start and end date of the resource. The value "0" indicates that the start and end date of the 'Inkomstenverhouding' does not deviate from the start and end date of the resource.

lv_enddate - End date

The [NLHrPayroll.lv_enddate] field stores the employment end date of the resource. This field is enabled when the [NLHrPayroll.lv_dev_date] field has the value "1".

lv_indication - Name income proportion (Aanduiding inkomstenverhouding)

The [NLHrPayroll.lv_indication] field stores the labor relationships per resource.

Note! This field is applicable until 2006.

lv_nummer - (Nummer inkomstenverhouding)

The [NLHrPayroll.lv_nummer] field stores the 'Nummer inkomstenverhouding'. This field is used to identify the labor relationships per resource.

Note! This field is applicable as from 2007.

lv_startdate - Start date

The [NLHrPayroll.lv_startdate] field stores the employment start date of the resource. This field is enabled when the [NLHrPayroll.lv_dev_date] field has the value "1".

Job_Title - Job title

The [NLHrPayroll.Job_Title] field has the same functionality as the [NLHrPayroll.Job_Title] field.

Korting_levensloop - Walk of life discount (Levensloopverlofkorting)

The [NLHrPayroll.Korting_levensloop] field stores the deduction amount from the employee fiscal wage for life course regulation.

Note! This field is made available as from 2006 for the 'Life course regulation'.

Msv_CAO_Code - General labor agreement code (CAO code)

The [NLHrPayroll.Msv_CAO_Code] field stores the CAO code of the employee. Which codes are valid, depends on the Industrial Insurance Board. This field is applicable for the personnel declaration to UWV SFB, UWV SFS, UWV GUO and UWV RELAN.

Msv_Change_Idate - Start date personnel declaration (Datum ingang)

The [NLHrPayroll.Msv_Change_Idate] field stores the date of changes in the personnel declaration. This date is used in the personnel declaration.

Msv_Declaration_Type - Type of personnel declaration (Aard melding)

The [NLHrPayroll.Msv_Declaration_Type] field indicates the type of personnel declaration. Depending on making an A-type or a B-type declaration, other fields must be filled in the declaration records. The [NLHrPayroll.Msv_Declaration_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
A	A Indiensttreding
B	A Wijziging arbeidsverhouding
C	A Correctie eerdere melding
D	A Geen van bovenstaande
E	B Uitdiensttreding
F	B Overlijden
G	B Geen van bovenstaande
H	B Wijziging uitdiensttreding

Msv_Hours_Week - Average number of hours per week (Gemiddeld aantal uren per week)

The [NLHrPayroll.Msv_Hours_Week] field stores the average number of hours per week. This field is applicable for the personnel declarations to the UWV CADANS, UWV SFB, UWV SFS and UWV GUO.

Msv_Labour_Agreement - Regular employment (Op basis van arbeidsovereenkomst)

The [NLHrPayroll.Msv_Labour_Agreement] field indicates if the employee has an employment contract with the employer. This field is applicable for the personnel declarations to all parties of the UWV. The [NLHrPayroll.Msv_Labour_Agreement] field can contain the following values:

Value	Description
0	No employment contract
1	Employment contract

Note! If the [NLHrPayroll.Msv_Labour_Agreement] field has the value "0", then the [NLHrPayroll.Msv_Labour_Exception] field is enabled, to choose another form of employment.

Msv_Labour_Code - Relation of employee to employer (Uitzonderingssituatie)

The [NLHrPayroll.Msv_Labour_Code] field indicates the relation between the employee and the employer. This field is applicable for the personnel declarations to all parties of the UWV. The [NLHrPayroll.Msv_Labour_Code] field refers to the DDTests table which contains the following values for this field:

Value	Description
D	Directeur of grootaandeelhouder
F	Familie van eigenaar
N	Niet van toepassing
O	Oproepkracht zonder verplichting
P	Oproepkracht met verplichting
V	Vorige eigenaar

Msv_Labour_Exception - Type of employment (Anders, aard arbeidsovereenkomst)

The [NLHrPayroll.Msv_Labour_Exception] field stores the type of agreement between the employee and the employer, when this differs from a regular employment contract. This field is applicable to all parties of the UWV. The [NLHrPayroll.Msv_Labour_Exception] field can contain the following values:

Value	Description
00	Niet van toepassing
01	Aanneming van werk
02	Vertegenwoordiger
03	WSW-er
04	Stagiair
05	Vrijwilliger of reservist politie/brandweer
06	Thuiswerker
07	Uitzendkracht
08	Musicus of artiest
09	Persoonlijke arbeid
10	Deelvisser
11	Topsporter
12	Gemoedsbezwaarde
13	Bestuurder coöp.
14	PMA Scholier/student (not used anymore)
15	PMA Huisvrouw (m/v) (not used anymore)
16	PMA Uitkeringsgerechtigde
17	Iemand die onbetaald verlof heeft

Value	Description
18	GLW Scholier/student
19	GLW Huisvrouw (m/v)
20	GLW Asielzoeker
21	GLW Overige categorieën
22	VUT
23	Publiekrechtelijke aanstelling
24	Ontslaguitkering
25	Werkt als zelfstandige
26	Ambtenaar

Msv_Labour_Regular - Working fixed or variable hours (Regelmatig arbeidspatroon)

The [NLHrPayroll.Msv_Labour_Regular] field indicates if the employee is working regular days per 4 weeks in the case of UWV GAK or in case of UWV CADANS and UWV SFS is working regular hours per week. The [NLHrPayroll.Msv_Labour_Regular] field can contain the following values:

Value	Description
0	No regular days / hours
1	Regular days / hours

Msv_Loonsom - Expected amount basic value of pension (Loonsom RELAN / VNPS)

The [NLHrPayroll.Msv_Loonsom] field stores the expected year wage which is the basic value for pension. The value must be rounded to whole amounts. This field is used for the personnel declaration to UWV GUO for the year amount used for the calculation of V(N)PS. This field is also used for the personnel declaration to UWV CADANS for RELAN pensions.

Msv_Own_Risk_Code - Risk fund (Eigen risicodrager)

The [NLHrPayroll.Msv_Own_Risk_Code] field indicates if the employer has the employee insured in the risk-fund. This field is applicable for the personnel declarations to UWV CADANS. The [NLHrPayroll.Msv_Own_Risk_Code] field refers to the DDTests table which contains the following values for this field:

Value	Description
1	Normale regeling
2	Niet van toepassing
3	Bijzondere regeling

Msv_part_BPS - Participant BPS (Deelnemer BPS)

The [NLHrPayroll.Msv_part_BPS] field indicates if the employee is a participant of the pension fund BPS (Pensioenbedrijf voor het Slagersbedrijf). This field is applicable for the personnel declaration to UWV GUO. The [NLHrPayroll.Msv_part_BPS] field can contain the following values:

Value	Description
0	No participant
1	Participant

Msv_part_OBF - Participant OBF (Deelnemer OBF)

The [NLHrPayroll.Msv_part_OBF] field indicates if the employee is a participant of the pension fund OBF (Overbruggingsfonds). This field is applicable for the personnel declaration to UWV GUO. The [NLHrPayroll.Msv_part_OBF] field can contain the following values:

Value	Description
0	No participant
1	Participant

Msv_part_stein - Participant mr. A. Steinkuhler fund (Deelnemer Steinkuhlerfonds)

The [NLHrPayroll.Msv_part_stein] field indicates if the employee is a participant of the mr. A. Steinkuhler fund. This field is applicable for the personnel declaration to UWV GUO. The [NLHrPayroll.Msv_part_stein] field can contain the following values:

Value	Description
0	No participant
1	Participant

Msv_part_VNPS - Participant VNPS (Deelnemer VNPS)

The [NLHrPayroll.Msv_part_VNPS] field indicates if the employee is a participant of the pension fund VNPS (Vereniging Nederlands Pensioenfonds voor de Sigarenindustrie en aanverwante bedrijven). This field is applicable for the personnel declaration to UWV GUO. The [NLHrPayroll.Msv_part_VNPS] field can contain the following values:

Value	Description
0	No participant
1	Participant

Msv_premiumgrp_Code - Premium group (Premiegroep)

The [NLHrPayroll.Msv_premiumgrp_Code] field stores the premium group for the sickness-fund (ZW). This field is used for the personnel declaration to the UWV SFB. The available premium groups are base on payroll year that is stored in the [NLHrPayroll.Reference_year] and sector that is stored in the [NLHrPayroll.Sector] field as per described below:

- [NLHrPayroll.Reference_year] < 2006

[NLHrPayroll.Sector]	[NLHrPayroll.Msv_premiumgrp_code]	Description
00, 02, 04, 05, 07, 08, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 38, 38, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 53, 55, 56, 68, 69	0	Niet van toepassing
01	0	Niet van toepassing
	1	Gereduceerd
	2	Normaal
03, 06, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 91, 92, 93, 94, 95, 96	G	Niet van toepassing
	A	Premiegroep A
	B	Premiegroep B
09	0	Niet van toepassing
	1	Grafische industrie exclusief fotografen
	2	Fotografen
22	0	Niet van toepassing
	1	Lid sfBi
	2	Geen lid sfBi
54	0	Niet van toepassing
	1	Laag
	2	Midden
	3	Hoog
52	0	Niet van toepassing
	1	Detachering
	2	Intermediaire diensten
	3	Uitzendbedrijven I A Kortingsklasse
	4	Uitzendbedrijven I A Middenklasse
	5	Uitzendbedrijven I A Opslagklasse
	6	Uitzendbedrijven II A Kortingsklasse
	7	Uitzendbedrijven II A Middenklasse
	8	Uitzendbedrijven II A Opslagklasse
9	Uitzendbedrijven I B + II B	

- [NLHrPayroll.Reference_year] >=2006

[NLHrPayroll.Sector]	[NLHrPayroll.Msv_premiumgrp_code]	Description
00, 02, 04, 05, 06, 07, 08, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 28, 29, 30, 31, 32, 34, 35, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 50, 51, 53, 55, 57, 58, 59, 60, 61, 62, 63, 65, 66, 68, 69, 91, 92, 93, 95, 96	1	Niet van toepassing
01, 03, 33, 54, 56	1	Los
	2	Vast
09	1	Grafische industrie exclusief fotografen
	2	Fotografen
45, 67	1	Niet van toepassing
	2	Vervangende wachtgeldpremie
52	1	Uitzendbedrijven II A Kortingsklasse
	2	Uitzendbedrijven II A Middenklasse
	3	Uitzendbedrijven II A Opslagklasse
	4	Uitzendbedrijven I A Kortingsklasse
	5	Uitzendbedrijven I A Middenklasse
	6	Uitzendbedrijven I A Opslagklasse
	7	Detachering
	8	Intermediaire diensten
	9	Uitzendbedrijven I B + II B
64, 94	1	Algemeen
	2	Gemeentevervangende wachtgeldpremie

Note! The [NLHrPayroll.Msv_premiumgrp_Code] field has different premium group values applicable to payroll year before 2006 and for payroll year 2006 onwards. The premium group values are also determined based on the sector (value in the [NLHrPayroll.Sector] field).

Msv_Print - Make personnel declaration (Melding sociale verzekering maken)

The [NLHrPayroll.Msv_Print] field indicates if a personnel declaration to the Industrial Insurance Board (MSV) should be printed. A personnel declaration must be made if the contract of the resource starts changes or ends. The [NLHrPayroll.Msv_Print] field can contain the following values:

Value	Description
0	No print
1	Print

Msv_Reduction_WA_Code - Reduction WA premium (Reductie premie wachtgeld)

The [NLHrPayroll.Msv_Reduction_WA_Code] field stores the code of the reduction of the WA premium for the agricultural sector. This field is used for the personnel declaration to UWV GUO. The [NLHrPayroll.Msv_Reduction_WA_Code] field refers to the DDTests table which contains the following values for this field:

Value	Description
0	Niet van toepassing
1	Vast dienstverband
2	Los dienstverband

Msv_Resign_Code - Reason resignation (Einde dienstverband)

The [NLHrPayroll.Msv_Resign_Code] field stores the reason of resignation of an employee. This field is only available if the [NLHrPayroll.Msv_Declaration_Type] field has the value "E", "F", "G" or "H". The [NLHrPayroll.Msv_Resign_Code] field refers to the DDTests table which contains the following values for this field:

Value	Description
0	Niet van toepassing
1	WerkeloosheidsWet (WW)
2	Vervroegde UitTreding (VUT)
3	Wet op de ArbeidsOngeschiktheid (WAO)
4	Overige
5	Flexwerker: geen werk aangeboden
6	Flexwerker: werk aangeboden
7	Flexwerker: lopend arbeidscontract
8	Flexwerker: opdracht ingetrokken
9	Flexwerker: ontslag genomen

Msv_WAO_Percentage - Percentage employment disabled (Percentage arbeidsongeschiktheid)

The [NLHrPayroll.Msv_WAO_Percentage] field stores the percentage in which the employee is employment disabled. This field is applicable for the personnel declaration to UWV SFB and the declaration to Via Prisma (UWV GAK). The [NLHrPayroll.Msv_WAO_Percentage] field can contain the following values:

Value	Description
00	(No percentage employment disabled)
15	(15 - 25 %)
25	(25 - 35 %)
35	(35 - 45 %)
45	(45 - 55 %)
55	(55 - 65 %)
65	(65 - 80 %)
80	(80 - 100 %)

Payment_Period - Payment period (Betalingperiode)

The [NLHrPayroll.Payment_Period] field stores the payment period of the resource. The [NLHrPayroll.Payment_Period] field can contain the following values for this field:

Value	Description	Remark
A	Halfjaarlijks	Half-yearly
D	Dagelijks	Daily
M	Maandelijks	Monthly
Q	Per kwartaal	Quarterly
V	Elke 4 weken	4-weekly
W	Wekelijks	Weekly
Y	Jaarlijks	Yearly

Note! This field will only be enabled for the first payroll data for a new resource. After that, it will be disabled always.

PayrollYear - Payroll year

The [NLHrPayroll.PayrollYear] field stores the payroll year to which the resource specific payroll settings apply. The value of this field has to lie between the highest and lowest payroll year (as defined in the settings).

Period - Period

The [NLHrPayroll.Period] field stores the period to which the resource specific payroll settings apply.

Plo_ris_fonds - Dispensation risk fund (Dispensatie risicofonds)

The [NLHrPayroll.Plo_ris_fonds] field indicates if the employee has dispensation for the "Risicofonds". The value "1" indicates that the employee has dispensation; the value "0" indicates that the employee does not have dispensation.

Reference_Period - Reference period (Peilperiode)

The [NLHrPayroll.Reference_Period] field indicates in which period the employee will get an increase of his/her job level.

Reference_Year - Reference year (Peiljaar)

The [NLHrPayroll.Reference_Year] field indicates in which year the wage scale applies to the employee.

Res_ID - Resource

The [NLHrPayroll.Res_ID] field stores the resource ID for which payroll settings are created. The [NLHrPayroll.Res_ID] field refers to the [Humres.Res_ID] field.

Sector - Sector (Sector)

The [NLHrPayroll.Sector] field stores the sector of the employee. The sector number is a unique number. This field determines (together with the [NLHrPayroll.SubSector] field) which premium component(s) must be linked to the resource. Each premium component will be depended on the sector and the sub sector of the company. Default this will be the one in the setting, but this can be different per resource. For each sector, a number of sub sectors (CAO's) are available. The [NLHrPayroll.Sector] field can contain the following values:

Value	Description
00	00 Niet van toepassing
01	01 Agrarisch bedrijf
02	02 Tabaksverwerkende industrie
03	03 Bouwbedrijf
04	04 Baggerbedrijf
05	05 Houten emballage-, houtwaren- en borstelindustrie
06	06 Timmerindustrie
07	07 Meubel- en orgelbouwindustrie
08	08 Groothandel in hout, zagerijen, schaverijen en houtbereidingsindustrie
09	09 Grafische industrie
10	10 Metaalindustrie
11	11 Elektrotechnische industrie
12	12 Metaal- en technische bedrijfstakken
13	13 Bakkerijen
14	14 Suikerverwerkende industrie
15	15 Slagersbedrijven
16	16 Slagers overig
17	17 Detailhandel
18	18 Reiniging
19	19 Grootwinkelbedrijf

Value	Description
20	20 Havenbedrijven
21	21 Havenclassificeerders
22	22 Binnenscheepvaart
23	23 Visserij
24	24 Koopvaardij
28	28 Taxi- en ambulancevervoer
29	29 Openbaar vervoer
30	30 Besloten busvervoer
31	31 Overige personenvervoer te land en in de lucht
32	32 Overige goederen vervoer te land en in de lucht
33	33 Horeca algemeen
34	34 Horeca catering
35	35 Gezondheid, geestelijke en maatschappelijke belangen
38	38 Banken
39	39 Verzekeringswezen en ziekenfondsen
40	40 Uitgeverij
41	41 Groothandel I
42	42 Groothandel II
43	43 Zakelijke dienstverlening I
44	44 Zakelijke dienstverlening II
45	45 Zakelijke dienstverlening III
46	46 Zuivelindustrie
47	47 Textielindustrie
48	48 Steen-, cement-, glas-, en keramische industrie
49	49 Chemische industrie
50	50 Voedingsindustrie
51	51 Algemene industrie
52	52 Uitzendbedrijven
53	53 Bewakingsondernemingen
54	54 Culturele instellingen
55	55 Overige takken van bedrijf en beroep
56	56 Schildersbedrijf
57	57 Stukadoorsbedrijf
58	58 Dakdekkersbedrijf

Value	Description
59	59 Mortelbedrijf
60	60 Steenhouwersbedrijf
61	61 Overheid, Onderwijs en wetenschappen
62	62 Overheid, Rijk, politie en rechterlijke macht
63	63 Overheid, Defensie
64	64 Overheid, Provincies, gemeenten en waterschappen
65	65 Overheid, Openbare nutsbedrijven
66	66 Overheid, Overige instellingen
67	67 Overheid, Werk en reïntegratie
68	68 Railbouw
69	69 Telecommunicatie

Note! To differentiate between government sector and private sector, the value '9' is used in the [NLHrPayroll.Sector] field. This split sector is only applicable to [NLHrPayroll.Sector] field with value "61" to "66". The table below illustrates the difference between the sector value for government sector and private sector:

Value	Description	Remark
61	61 Overheid, Onderwijs en wetenschappen	For private sector
91	61 Overheid, Onderwijs en wetenschappen (volgens bedrijfsleven)	For government sector
62	62 Overheid, Rijk, politie en rechterlijke macht	For private sector
92	62 Overheid, Rijk, politie en rechterlijke macht (volgens bedrijfsleven)	For government sector
63	63 Overheid, Defensie	For private sector
93	63 Overheid, Defensie (volgens bedrijfsleven)	For government sector
64	64 Overheid, Provincies, gemeenten en waterschappen	For private sector
94	64 Overheid, Provincies, gemeenten en waterschappen (volgens bedrijfsleven)	For government sector
65	65 Overheid, Openbare nutsbedrijven	For private sector
95	65 Overheid, Openbare nutsbedrijven (volgens bedrijfsleven)	For government sector
66	66 Overheid, Overige instellingen	For private sector
96	66 Overheid, Overige instellingen (volgens bedrijfsleven)	For government sector

Slip_Name_Method - Payroll slip method (Samenstelling naam)

The [NLHrPayroll.Slip_Name_Method] field indicates how the name of the employee should be printed on the payroll slip. The [NLHrPayroll.Slip_Name_Method] field refers to the DDTests table which contains the following values:

Value	Description
0	Achternaam + meisjesnaam
1	Achternaam
2	Meisjesnaam
3	Meisjesnaam + achternaam

SlipText1 - First text line on salary slip (Sliptekst regel 1)

The [NLHrPayroll.SlipText1] field stores the first text line that can be printed on the payroll slip for the employee. Whether the text is printed is dependent on the layout settings of the payroll slip.

SlipText2 - Second text line on salary slip (Sliptekst regel 2)

The [NLHrPayroll.SlipText2] field stores the second text line that can be printed on the payroll slip for the employee. Whether the text is printed is dependent on the layout settings of the payroll slip.

SlipText3 - Third text line on salary slip (Sliptekst regel 3)

The [NLHrPayroll.SlipText3] field stores the third text line that can be printed on the payroll slip for the employee. Whether the text is printed is dependent on the layout settings of the payroll slip.

Soc_BTER_Days - (BTER dagen / Tijdsparfonds dagen)

The [NLHrPayroll.Soc_BTER_Days] field stores the following values:

- Before 2006 (the field caption is BTER dagen)
The [NLHrPayroll.Soc_BTER_Days] field stores the number of BTER (Bedrijfstak eigen regeling) days. This field is used to enter a number of sick days that exceeds the 130 sick days. These days are used to calculate the "Vakantiebon". The value of the "Vakantiebon" is reduced if the employee is more than 130 days sick. The [NLHrPayroll.Soc_BTER_Days] field is applicable for the UWV SFB.
- As from 2006 (the field caption is Tijdsparfonds dagen)
The [NLHrPayroll.Soc_BTER_Days] field stores the number of days used to calculate the 'Overige bronnen' of the 'Tijdsparfonds' component (subtype 2203 and 1122).

Soc_Leerling - School attendance days (Aantal dagen leerplichting)

The [NLHrPayroll.Soc_Leerling] field stores the number of days the employee is still obliged to go to school. This influences the calculation of the "Vakantiebon", because other percentages are used in the calculation. This field is only applicable for UWV SFB. The [NLHrPayroll.Soc_Leerling] field refers to the DDTests table which contains the following values for this field:

Value	Description
0	0 Dagen
1	1 Dag
2	2 Dagen

Soc_Type_Line - Line type (Soort regel)

The [NLHrPayroll.Soc_Type_Line] field indicates the type of line that must be used in the declaration to the UWV SFB. The [NLHrPayroll.Soc_Type_Line] field contains the following values:

Value	Description	Remark
A	Nabetaling	Available before 2006
M	Maximering BTER	
N	Normaal	
R	Roostervrije dagen	
V	Vervangt ambtshalve	
Z	Ziekte wet vakantiefondsverlaging	
A	Normaal	Available as from 2006
I	Reintegratie	
L	Levensloopuitkering	
T	Gecorrigeerd BTER uurloon bij ziekte na 52e week	

Soc_UTA - CAO UTA applicable (UTA personeel)

The [NLHrPayroll.Soc_UTA] field indicates if the CAO UTA (Uitvoerend, Technisch of Administratief) is applicable for the employee. This field influences the calculation of the pension premium that is used in the building construction. The value "1" indicates that the CAO UTA is applicable; the value "0" indicates that the CAO UTA is not applicable.

Soc_WAO_Type - Disabled employment insurance act (WAO)

The [NLHrPayroll.Soc_WAO_Type] field indicates if the WAO premium should be calculated. The [NLHrPayroll.Soc_WAO_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
J	Yes
N	No

Note! This field is used before 2006.

Soc_WW_Type - Unemployment insurance act (WW)

The [NLHrPayroll.Soc_WW_Type] field indicates if the WW premium should be calculated. The [NLHrPayroll.Soc_WW_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
G	Geen franchise
J	Yes
N	No

Soc_ZFW_Type - Insured for health care

The [NLHrPayroll.Soc_ZFW_Type] field is used differently before and as from 2006.

- Before 2006
The [NLHrPayroll.Soc_ZFW_Type] field indicates if the ZFW premium should be calculated. The [NLHrPayroll.Soc_ZFW_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
J	Yes
N	No

- As from 2006
The [NLHrPayroll.Soc_ZFW_Type] field indicates if the ZVW premium should be calculated. The [NLHrPayroll.Soc_ZFW_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
J	Ja, normal tarief
N	Nee
V	Ja, verlaagd tarief
X	Ja, normal tarief (inning CVZ)
Y	Ja, verlaagd tarief (inning CVZ)

Soc_ZW_Type - Insured for health care (ZW)

The [NLHrPayroll.Soc_ZW_Type] field indicates if the ZW premium should be calculated. The [NLHrPayroll.Soc_ZW_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
J	Yes
N	No

StartDate - Start date

The [NLHrPayroll.StartDate] field stores the start date of the payroll settings. This field is filled with the first date of the period to which the payroll settings apply.

SubSector - Sub sector (CAO)

The [NLHrPayroll.SubSector] field stores the sub sector (the CAO) of the employee. This field determines (together with the [NLHrPayroll.Sector] field) which premium component(s) must be linked to the resource. Each premium component will be depended on the sector and the sub sector of the company. Default this will be the one in the setting, but this can be different per resource. The value of the [NLHrPayroll.SubSector] field is an internal code and is used for the CAO's that are delivered by Exact Software. The [NLHrPayroll.SubSector] field can contain the following values:

Sector	Sub sector	Description
00	0000	Geen CAO
01	0101	Bedrijfsverzorgingsdiensten (BGZ)
01	0102	Bloembollengroothandel
01	0103	Open Teelten Boomkwekerij
01	0104	Bosbouw
01	0105	Groenvoederdrogerijen
01	0106	Hoveniersbedrijf
01	0107	Dierhouderij
01	0108	Landbouwwerktuigen exploiterende ondernemingen (LEO)
01	0109	Paddestoelen
01	0110	Rundveeverbetering
01	0111	GlasTuinbouw
01	0112	Open Teelten Landbouw
01	0113	Open Teelten Tuinbouw
01	0114	Open Teelten Bloembollen
01	0199	Een andere, niet vermelde, CAO
02	0000	Geen CAO

Sector	Sub sector	Description
03	0301	Bouwbedrijf
03	0302	Bouwbedrijf UTA personeel
03	0303	Bouwbedrijf Regeling Vroegpensioen UTA personeel
03	0304	Bouwbedrijf vakkrachten uitzendwezen
03	0305	Bouwbedrijf UTA vakkrachten uitzendwezen
03	0306	Bouwbedrijf vrijwillige deelname UTA
03	0399	Geen CAO
04	0000	Geen CAO
05	0000	Geen CAO
06	0601	Timmerfabrieken
06	0602	Timmerfabrieken UTA personeel
06	0699	Geen CAO
07	0701	Meubelindustrie en meubileringsbedrijven
07	0799	Geen CAO
08	0801	Houthandel
08	0899	Geen CAO
09	0901	Grafimedia
09	0999	Geen CAO
10	1001	Metalektro
10	1099	Geen CAO
11	1101	Metalektro
11	1199	Geen CAO
12	1201	Carrosseriebedrijf
12	1202	Elektrotechnisch bedrijf
12	1203	Goud- en Zilvernijverheid
12	1204	Isolatiebedrijf
12	1205	Koeltechnisch installatiebedrijf
12	1206	Loodgieters-, Fitters- en Centrale Verwarmingsbedrijf
12	1207	Metaalbewerkingsbedrijf
12	1208	Motorvoertuigen en Tweewielersbedrijf
12	1209	Rolluiken-, Markiezen- en Zonweringsbedrijven
12	1299	Geen CAO
13	1301	Bakkersbedrijf (incl. Banketbakkersbedrijf)
13	1399	Geen CAO

Sector	Sub sector	Description
14	1402	Suikerwerk- en Chocoladeverwerkende industrie
14	1499	Geen CAO
15	1501	Slagersbedrijf
15	1599	Geen CAO
16	0000	Geen CAO
17	1701	Bloemendetailhandel
17	1702	Boek- en kantoorvakhandel
17	1703	Detailhandel (verord. arbeidsvoorw. detailhandel)
17	1704	Detailhandel in aardappelen, groente en fruit
17	1705	Doe-het-zelfbranche
17	1706	Drogisterijbranche
17	1707	Elektrotechnische detailhandel
17	1708	Gemengde branche en speelgoedbranche
17	1709	Kappersbedrijf
17	1710	Levensmiddelenbedrijf
17	1711	Melk- en zuiveldetailhandel
17	1712	Mode en Sport
17	1713	Optiekbedrijven
17	1714	Reisbranche
17	1715	Samenwerkende branches
17	1716	Schoendetailhandel
17	1717	Schoenherstellersbedrijf
17	1718	Orthopedische schoenmakerijen
17	1719	Slijterijen
17	1720	Tandtechniek
17	1721	Tuinentra
17	1723	Videodetailhandel
17	1724	Wonen
17	1725	Zeilmakerijen
17	1799	Geen CAO
18	1801	Schoonmaak- en Glazenwassersbedrijf
18	1899	Geen CAO
19	0000	Geen CAO
20	0000	Geen CAO

Sector	Sub sector	Description
21	0000	Geen CAO
22	0000	Geen CAO
23	0000	Geen CAO
24	0000	Geen CAO
28	2801	Taxivervoer
28	2802	Ambulance
28	2899	Geen CAO
29	2901	Openbaar vervoer
29	2999	Geen CAO
30	3001	Besloten busvervoer
30	3099	Geen CAO
31	0000	Geen CAO
32	3201	Beroepsgoederenvervoer over de weg, mobiele kranen
32	3202	Goederenvervoer Nederland (KNV)
32	3299	Geen CAO
33	3301	Horeca en aanverwante bedrijf
33	3302	Verblijfsrecreatie
33	3399	Geen CAO
34	3401	Contractcateringbranche
34	3499	Geen CAO
35	3501	Apotheken
35	3502	Geestelijke gezondheidszorg
35	3503	Gehandicaptenzorg
35	3504	Huisartsenzorg
35	3505	Jeugdhulpverlening
35	3506	Kinderopvang
35	3507	Kunstzinnige vorming
35	3509	Tandartsassistenten
35	3510	Thuiszorg
35	3511	Verpleeg- en verzorgingshuizen
35	3512	Welzijn
35	3513	Sport
35	3515	Contractspelers betaald voetbal (CFK)
35	3599	Geen CAO

Sector	Sub sector	Description
38	0000	Geen CAO
39	0000	Geen CAO
40	0000	Geen CAO
41	4103	Technische groothandel
41	4199	Geen CAO
42	4206	Glashandel, Glasbewerkings- en Glazeniersbedrijf
42	4299	Geen CAO
43	0000	Geen CAO
44	4401	Architectenbureaus
44	4499	Geen CAO
45	0000	Geen CAO
46	0000	Geen CAO
47	0000	Geen CAO
48	0000	Geen CAO
49	0000	Geen CAO
50	5003	Groente- en fruitverwerkende industrie
50	5099	Geen CAO
51	0000	Geen CAO
52	5201	Uitzendkrachten (ABU)
52	5299	Geen CAO
53	5301	Particuliere beveiligingsorganisaties
53	5399	Geen CAO
54	0000	Geen CAO
55	0000	Geen CAO
56	5601	Schilders-, afwerkings- en glazetbedrijf
56	5602	Schilders-, afwerkings- en glazetbedrijf UTA personeel
56	5699	Geen CAO
57	5701	Stukadoors, afbouw en terrazzobedrijf/vloerenbedrijf
57	5702	Stukadoors, afbouw en terrazzobedrijf/vloerenbedrijf UTA personeel
57	5799	Geen CAO
58	5801	Bitumineuze en kunstof dakbedekkingsbedrijven
58	5802	Bitumineuze en kunstof dakbedekkingsbedrijven UTA personeel
58	5899	Geen CAO
59	5901	Mortelbedrijf

Sector	Sub sector	Description
59	5902	Mortelbedrijf UTA personeel
59	5999	Geen CAO
60	6001	Natuursteenbedrijf
60	6002	Natuursteenbedrijf UTA personeel
60	6099	Geen CAO
61	0000	Geen CAO
62	0000	Geen CAO
63	0000	Geen CAO
64	6401	Provincies
64	6402	Gemeenten
64	6499	Geen CAO
65	0000	Geen CAO
66	0000	Geen CAO
67	0000	Geen CAO
68	0000	Geen CAO
69	0000	Geen CAO
91	0000	Geen CAO
92	0000	Geen CAO
93	0000	Geen CAO
94	9401	Provincies
94	9402	Gemeenten
94	9499	Geen CAO
95	0000	Geen CAO
96	0000	Geen CAO

Syscreated - Syscreated

The [NLHrPayroll.Syscreated] field stores the date and time when resource specific payroll settings created. The system populates this field for all resource specific payroll settings.

Syscreator - Syscreator

The [NLHrPayroll.Syscreator] field stores the creator of the resource specific payroll settings. The system populates this field for all resource specific payroll settings. The [NLHrPayroll.Syscreator] field refers to the [Humres.Res_ID] field.

SysGuid - SysGuid

The [NLHrPayroll.SysGuid] field stores a unique identifier and is used for technical reasons only. It has no functional meaning. The system populates this field for all resource specific payroll settings.

Sysmodified - Sysmodified

The [NLHrPayroll.Sysmodified] field stores the date and time when resource specific payroll settings was last modified. Initially, this field contains the creation date. When a user modifies the resource specific payroll settings, the date and time stored in the [NLHrPayroll.Sysmodified] field are changed to the date and time of modification. The system populates this field for all resource specific payroll settings.

Sysmodifier - Sysmodifier

The [NLHrPayroll.Sysmodifier] field stores the ID of the person who modified resource specific payroll settings. Initially, this field contains the creator ID. When a user modifies the resource specific payroll settings, the modifier ID stored in the [NLHrPayroll.Sysmodifier] field is changed to the ID of the user who modified the resource specific payroll settings. The system populates this field for all resource specific payroll settings. The [NLHrPayroll.Sysmodifier] field refers to the [Humres.Res_ID] field.

Tax_Beschikking_Amount - Amount where no tax is calculated over for artist (Kostenbeschikking artiest)

The [NLHrPayroll.Tax_Beschikking_Amount] field stores the "Beschikking" for an artist. This field is only available if the [NLHrPayroll.Tax_Exception_Type] field has the values "B", "C", "P", and "V".

Tax_Exception_Type - Uitzonderingsregeling

The [NLHrPayroll.Tax_Exception_Type] field indicates if exceptional tax and social premiums calculation apply to an employee. The [NLHrPayroll.Tax_Exception_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
B	Buitenlandse artiest / sporter
C	Buitenlandse artiestengezelschappen en sportploegen
G	Geen uitzondering
H	Binnenlandse artiest/sporter
	Binnenlandse artiest (as from 2007)
L	Studenten/scholieren regeling

Value	Description
P	Binnenlandse artiest/sporter (kostenbeschikking/kleine artiest/sporter)
	Binnenlandse artiest (kostenbeschikking) (as from 2007)
R	Vergoedingsregeling bruto bedragen exclusief vergoeding
S	Vergoedingsregeling bruto bedragen inclusief vergoeding
T	Thuiswerker
V	Buitenlandse sporter (verlaagd tarief)

Tax_Extra_Amount - Extra tax amount/percentage (Bedrag extra loonheffing)

The [NLHrPayroll.Tax_Extra_Amount] field stores the amount of percentage of tax that the employee wants to pay extra to compensate for the income tax. This field is only available if the [NLHrPayroll.Tax_Extra_Type] field has the value "B" or "P".

Tax_Extra_Type - Extra tax (Extra loonheffing)

The [NLHrPayroll.Tax_Extra_Type] field indicates if the employee wants to pay an extra amount or percentage of tax to compensate for the income tax. This field is not enabled if the [NLHrPayroll.Tax_Payment] field has the value "1". The [NLHrPayroll.Tax_Extra_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
B	Bedrag
N	Niet van toepassing
P	Percentage

Tax_Franchise - Code franchise (Vakantiebonnen)

The [NLHrPayroll.Tax_Franchise] field indicates which franchise calculation applies for the resource. Depending on the value of this field, other franchises in the deductions, other tax tables are valid. The [NLHrPayroll.Tax_Franchise] field contains the following values:

Value	Description
0	Geen franchise
1	Minder dan 10 dagen
2	Vanaf 10 t/m 19 dagen
3	Vanaf 20 dagen

Tax_Income_Code - Code of income (Code soort inkomen)

The [NLHrPayroll.Tax_Income_Code] field stores the code of income which is used for tax declarations.

Value	Description
11	11 Loon/salaris ambtenaren
12	12 Loon gepremieerde gesubsidieerde en gebudgetteerde instellingen
13	13 Directeuren NV/BV verzekerd
14	14 Loon/salaris overage werknemers niet verzekerd voor WAO
15	15 Overige lonen en salarissen
17	17 Directeuren NV/BV niet verzekerd
18	18 Wachtgeld uitgekeerd door overheidsinstellingen
21	21 Pensioen/lijffrente etc.
22	22 Uitkeringen AOW
23	23 Oorlogs- en verzetspensioenen
24	24 Uitkeringen ANW
31	31 ZW en vrijwillige verzekering ZW
32	32 Uitkeringen WAO en AAW
33	33 Uitkeringen nWW
34	34 Uitkeringen IOAW
35	35 Vervolgutkeringen nWW
36	36 Uitkeringen WAZ
37	37 Uitkeringen Wajong
38	38 Samenloop WAZ/WAO met Wajong gelijktijdig of volgtijdelijk
42	42 Uitkeringen bijstandsbesluit zelfstandigen
43	43 Overige uitkeringen in het kader van de ABW
45	45 Uitkeringen IOAZ
46	46 Uitkering uit hoofde van de Toeslagenwet (as from 2006)
50	50 Uitkeringen overage sociale verzekeringswetten

Tax_Lagelonen_Type - Lower tax contributions for low salaries (Verminderende lage lonen)

The [NLHrPayroll.Tax_Lagelonen_Type] field indicates if a tax reduction must be calculated for the employer due to low salaries. The amount calculated depends on the age, the fiscal wage (without holiday vouchers), the franchise code of the employee and the hours worked per week. The [NLHrPayroll.Tax_Lagelonen_Type] field can contain the following values:

Value	Description
J	Yes
N	No

Note! This field is visible before 2006.

Tax_Payment - Pay tax (Loonheffing)

The [NLHrPayroll.Tax_Payment] field indicates whether or not tax must be paid. The value "1" indicates that tax must be paid; the value "0" indicates that no tax must be paid. If no tax must be paid, all tax related fields are disabled.

Tax_Percentage_Rule - Percentage compensation regulation (Percentage vergoedingsregeling)

The [NLHrPayroll.Tax_Percentage_Rule] field stores the percentage of the 30% calculation. The value of the percentage is between 0 and 30. This field is only enabled if the exception rule, which is stored in the [NLHrPayroll.Tax_Exception_Type] field, has the values "R", "S", and "U".

Tax_Rebate_Elderly - Extra elderly tax rebates (Aanvullende ouderkorting)

The [NLHrPayroll.Tax_Rebate_Elderly] field indicates whether or not the resource has an elderly tax rebate. A resource can only have an elderly tax rebate if he/she is single, is older than 65 and is paid with the green table and has a fiscal wage lower than EUR 27.704,64 a year (2001).

Tax_Rebate_ldate - Start date tax rebate (Datum ingang)

The [NLHrPayroll.Tax_Rebate_ldate] field stores the date the tax rebate becomes valid.

Tax_Rebate_Type - Tax rebate (Loonheffingskorting)

The [NLHrPayroll.Tax_Rebate_Type] field indicates if the employee has a salary rebate or not. The salary rebate can only be used at one employer. Whether an employee has rebates can differ during a payroll year. The wage tax will be higher if the resource has no salary rebate. The [NLHrPayroll.Tax_Rebate_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description
0	Geen loonheffingskorting
1	Wel loonheffingskorting

Tax_Rebate_Young_Disab - Tax rebate for young employment disabled employees (Jonggehandicapten korting)

The [NLHrPayroll.Tax_Rebate_Young_Disab] field indicates if an employee has a young employment disabled tax rebate. The value "0" indicates the employee has the young employment disabled tax rebate; the value "1" indicates that the employee does not have the young employment disabled tax rebate. This rebate is not part of the tax tables.

Tax_Reduction_Type - Reducible tax calculation (Herleidingsregel)

The [NLHrPayroll.Tax_Reduction_Type] field stores the type of tax reduction for the employee. Tax is build up out of four parts: Tax, AOW, ANW and AWBZ. Depending on the reduction type, the salary calculation will be different. The [NLHrPayroll.Tax_Reduction_Type] field has the following values:

Value	Description
A	A<65 Uitsluitend premieplichtig (grensarbeider)
B	B<65 Uitsluitend belastingplichtig
C	C<65 Belasting- en premieplichtig AOW/ANW
D	D<65 Belasting- en premieplichtig AWBZ
E	E<65 Niet belasting- en premieplichtig AOW/ANW
F	F<65 Niet belasting- en premieplichtig AWBZ
G	G>=65, Uitsluitend premieplichtig (grensarbeider)
H	H>=65 Uitsluitend belastingplichtig
I	I>=65 Belasting- en premieplichtig ANW
J	J>=65 Belasting- en premieplichtig AWBZ
K	K>=65 Niet belasting- en premieplichtig ANW
L	L>=65 Niet belasting- en premieplichtig AWBZ
N	Niet van toepassing

Tax_Special_Percentage - Percentage special tax (Loonheffing bijzonder tarief)

The [NLHrPayroll.Tax_Special_Percentage] field stores the amount of fiscal special tariff for the year. This percentage is retrieved with the fiscal wage of the year before or manually entered.

Tax_Special_YearlyWage - Fiscal wage last year (Jaarloon voor bijzonder tarief)

The [NLHrPayroll.Tax_Special_YearlyWage] field stores the amount of fiscal wage of last year to retrieve the special tariff for the current year. This amount is retrieved from the fiscal wage of the year before. If the resource has become active during the last year, the fiscal wage of the last year is recalculated with the following formula: (full time number of working days) * (Fiscal wage) / (Days worked)

Tax_Table_Color - Table color (Tabelkleur)

The [NLHrPayroll.Tax_Table_Color] field stores the color of the tax table. This field is only enabled if the [NLHrPayroll.Tax_Payment] field has the value "1". The [NLHrPayroll.Tax_Table_Color] field refers to the DDTests table which contains the following values for this field:

Value	Description	Remark
G	Groene tabel	Payment out of current job(s)
W	Witte tabel	Payment out of earlier job(s)

Tax_Use_Daily - Use daily table (Dagtabel toepassen)

The [NLHrPayroll.Tax_Use_Daily] field stores the checking condition to determine if the daily table is applied for the calculation of the tax (and for the social insurances as from 2006) for full-time resource that ends or starts his employment within the period. The possible selection values are:

Value	Description	Remark
A	Automatisch	The check is performed as the current situation, the functionality remains the same. (But what is the current situation?) Note! It is not available as from 2006.
B	Bij in/uitdiensttreding	The daily table is always used when: ((contract startdate > startdate period AND contract startdate <= enddate period) OR (contract enddate >= startdate period AND contract enddate < enddate period)) regardless of the employees work schedule / days period.
J	Ja	The outcome of the check is always overruled and therefore the daily table is always used.
N	Nee	The check is not performed, so the daily table is not used.

Tax_Vermindering_Type - Lower tax contribution (Overige verminderingen (before 2007) / Afdrachtvermindering (as from 2007))

The [NLHrPayroll.Tax_Vermindering_Type] field indicates if and which tax reductions for the employer are applicable. The amount calculated depends on age, fiscal wage (without holiday vouchers), franchise code of the employee and the hours worked per week. The tax reduction can be calculated only with permission of the tax board.

The [NLHrPayroll.Tax_Vermindering_Type] field refers to the DDTests table which contains the following values for this field:

Value	Description	Remark
B	Onderwijs en Langdurig werklozen	Not available as from 2007
C	Onderwijs (Start kwalificatie) en Langdurig werklozen	Not available as from 2007
L	Langdurig werklozen	Not available as from 2007
N	Geen vermindering	
O	Onderwijs	
P	Onderwijs en Onderwijs (Start kwalificatie)	
S	Onderwijs (Start kwalificatie)	
T	Onderwijs (Stage MBO)	

Tax_Vermindering_Uren - Hours per week lower tax contribution (Uren per week vermindering)

The [NLHrPayroll.Tax_Vermindering_Uren] field stores the hours per week that should be used to calculate the lower tax contribution. This value of this field overrules the hours worked during the calculation. This field is available if the [NLHrPayroll.Tax_Vermindering_Type] field has a value other than "N" or if the [NLHrPayroll.Tax_Lagelonen_Type] field has the value "J".

Tax_vermindering_vastbedrag - Vermindering onderwijs vast bedrag

The [NLHrPayroll.Tax_vermindering_vastbedrag] field stores the amount of the tax reduction for a particular contribution as per stored in the [NLHrPayroll.Tax_vermindering_type] field.

Tax_Voordeelregel - Advantage tax calculation (Voordeelregel)

The [NLHrPayroll.Tax_Voordeelregel] field indicates if for the calculation of special taxes, only a special tariff is calculated or the lowest tax is calculated according to regular tax tables or special tariff. The value "1" indicates that the "Voordeelregel" should be applied; the value "0" indicates that the "Voordeelregel" should not be applied.

Timestamp - Timestamp

The [NLHrPayroll.Timestamp] field is a technical field, which the SQL server triggers. The timestamp sorts the data in created or changed order. The system assigns a new timestamp for each new resource specific payroll setting and updates the timestamp of the changed resource specific payroll settings.

Tsf_dagen_opg - (Tijdsparafonds dagen opgenomen)

The [NLHrPayroll.Tsf_dagen_opg] field stores the number of days that are taken by an employee. These days are used to calculate the BTER wage in the declaration (OLP).

In this field the number of days are stored that are taken by an employee. These days are used to calculate the BTER wage in the declaration (OLP).

Type - Type

The [NLHrPayroll.Type] field stores the type of the resource specific payroll settings, which is the value "N".

Ydec_b_Amount - Amount B (CAO uren)

The [NLHrPayroll.Ydec_b_Amount] field stores the number of hours worked per day base on sector.

Ydec_BPF_Code - BPF insured (Code BPF horeca en bakkers)

The [NLHrPayroll.Ydec_BPF_Code] field indicates if the employee is insured for the pension fund BPF. This field is used in the year declaration to the UWV GAK for the catering business and for bakeries.

Ydec_comp_Car - Company car (Auto van de zaak)

The [NLHrPayroll.Ydec_comp_Car] field indicates if the employee is using a car offered by the employer. This field is necessary for the year declaration to the tax department, but can also be printed on the year declaration to the employee. The [NLHrPayroll.Ydec_comp_Car] can contain the following values:

Value	Description
0	No company car
1	Company car

Ydec_Government - Government personnel (Overheidspersoneel)

The [NLHrPayroll.Ydec_Government] field indicates if the employee is working for the government. This field is used for the year declaration to the tax department. It is also used to indicate in the personnel declaration to UWV CADANS that an employee is insured for ABP pension fund. This only applies for the disability pension.

Ydec_Payment_amt - Amount benefit payment (Bedrag uitkering)

The [NLHrPayroll.Ydec_Payment_amt] field stores the amount of the benefit payment for one year paid by the employer to the employee. The benefit payment is something the employer is paying in name of the UWV. This field is applicable for the year declarations to UWV GAK, UWV SFB, UWV SFS, and UWV CADANS. The UWV GUO is asking this field in the periodical declaration.

Ydec_Payment_Days - Days benefit payment (Dagen aanvulling)

The [NLHrPayroll.Ydec_Payment_Days] field stores the number of days that the benefit payment (the [NLHrPayroll.Ydec_Payment_amt] field) is paid by the employer to the employee in one year.

Ydec_Payment_WAO - Amount A (Pensionengevend loon)

The [NLHrPayroll.Ydec_Payment_WAO] field contains the amount that is often called "Amount A" in the year declaration. For UWV GAK for bakeries, this field is used for the amount "WAO uitkering".

Ydec_Special_Amount1 - Amount special situation 1 (Bedrag speciale aanduiding 1)

The [NLHrPayroll.Ydec_Special_Amount1] field stores the first amount belonging to the special codes that can be entered which are not automatically generated by the software. Which codes are valid in a year can be found in the documentation of the tax department. This field is necessary for the year declaration to the tax department. The [NLHrPayroll.Ydec_Special_Amount1] field is only available if the [NLHrPayroll.Ydec_Special_Code1] field has a value other than "0".

Ydec_Special_Amount2 - Amount special situation 2 (Bedrag speciale aanduiding 2)

The [NLHrPayroll.Ydec_Special_Amount2] field stores the second amount belonging to the special codes that can be entered which are not automatically generated by the software. Which codes are valid in a year can be found in the documentation of the tax department. This field is necessary for the year declaration to the tax department. The [NLHrPayroll.Ydec_Special_Amount2] field is only available if the [NLHrPayroll.Ydec_Special_Code2] field has a value other than "0".

Ydec_Special_Amount3 - Amount special situation 3 (Bedrag speciale aanduiding 3)

The [NLHrPayroll.Ydec_Special_Amount3] field stores the third amount belonging to the special codes that can be entered which are not automatically generated by the software. Which codes are valid in a year can be found in the documentation of the tax department. This field is necessary for the year declaration to the tax department. The [NLHrPayroll.Ydec_Special_Amount3] field is only available if the [NLHrPayroll.Ydec_Special_Code3] field has a value other than "0".

Ydec_Special_Code1 - Code special situation 1 (Code speciale aanduiding 1)

The [NLHrPayroll.Ydec_Special_Code1] field stores a code for a first special situation. This code is not automatically generated by the software, but necessary for the year declaration to the tax department. Which codes are valid in a year can be found in the documentation of the tax department.

Ydec_Special_Code2 - Code special situation 2 (Code speciale aanduiding 2)

The [NLHrPayroll.Ydec_Special_Code1] field stores a code for a second special situation. This code is not automatically generated by the software, but necessary for the year declaration to the tax department. Which codes are valid in a year can be found in the documentation of the tax department.

Ydec_Special_Code3 - Code special situation 3 (Code speciale aanduiding 3)

The [NLHrPayroll.Ydec_Special_Code3] field stores a code for a third special situation. This code is not automatically generated by the software, but necessary for the year declaration to the tax department. Which codes are valid in a year can be found in the documentation of the tax department.

Ydec_Special_SV_Code - Code SVA (Code speciale aanduiding SV)

The [NLHrPayroll.Ydec_Special_SV_Code] field stores a special code that can have different values, depending on the Industrial Insurance Board. This field is used for the year declaration to the Industrial Insurance Board.

Ydec_vrijst_Code - Code exeption (Code premie vrijstelling)

The [NLHrPayroll.Ydec_vrijst_Code] field stores the code for employees who do not have to pay premiums. This field is applicable for the year declaration to UWV CADANS. The [NLHrPayroll.Ydec_vrijst_Code] can contain the following values:

Value	Description
0	Niet van toepassing
2	2 Gemoedsbezwaard
4	4 Marginale arbeid
5	5 Arbeidsgehandicapt
7	Combinatie van 2 en 5
9	Combinatie van 4 en 5

Ydec_VUT_Code - Code early retirement for catering (Code VUT horeca)

The [NLHrPayroll.Ydec_VUT_Code] field stores the code for early retirement for the CAO for catering companies (UWV GAK).

Ydec_Year_Hours - Hours per year (Gewerkte uren dit jaar)

The [NLHrPayroll.Ydec_Year_Hours] field stores the hours per year for the year declaration to UWV GAK for bakeries.

50.4 Country specific field details - China (CN)

The resource specific payroll settings for China are stored in the country specific fields for own legislation. In order to have a better understanding of the fields that are used, a view is created (the [CNHrPayroll] view) with field names that indicate better what the field represents.

Field name (CNHRPAYROLL)	Field name (HRPAYROLL)
District	Country8Char1
Fixed_Value	CountryFloat1
Base_Value_Method	CountryTest1

District - District

The [CNHrPayroll.District] field stores the resource's contribution district. The [CNHrPayroll.District] field can have one of the following values:

Value	Description
1	Huangpu
2	Luwan
3	Xuhui
4	Changning
5	Jingan
6	Putuo
7	Zhabei
8	Hongkou
9	Yangpu
10	Minhang
11	BaoShan
12	Jiading
13	Pudong
14	Nanhui
15	Fengxian
16	Songjiang
17	Jinshan
18	Qingpu
19	Chongming

Fixed_value - Fixed value

The [CNHrPayroll.Fixed_value] field stores the fixed amount to define the fixed value. The value stored in the [CNHrPayroll.Fixed_value] field will be used for the calculation of the resource's Social Insurance and Housing Fund.

Note! The [CNHrPayroll.Fixed_value] field is only filled when the [CNHrPayroll.Base_value_method] field is defined as fixed value.

Base_value_method - Base value method

The [CNHrPayroll.Base_value_method] field stores the base value method for the resource's contribution for social insurance and housing fund. The value stored in the [CNHrPayroll.Base_value_method] field will be used for the calculation of the resource's Social Insurance and Housing Fund. The [CNHrPayroll.Base_value_method] field is filled for components with subtype "2000", "2100", "2200", "2250", "2300", "2400" and "2500" at the [HrComponents.Comp_sub_type] field. The component's subtype has the following descriptions:

Subtype	Description
2000	Pension insurance
2100	Unemployment insurance
2200	Medical insurance
2250	Supplementary insurance
2300	Maternity insurance
2400	Injury insurance
2500	Housing Fund

The [CNHrPayroll.Base_value_method] field can have one of the following values:

Value	Description	Remark
A	Actual value	Summation of components with subtype "1000" and "1300" for calculation.
F	Fixed value	Fixed value used for calculation.

Note! If the [CNHrPayroll.Base_value_method] field stores the actual value, the [CNHrPayroll.Fixed_value] field is not filled.

50.5 Country specific field details - Malaysia (MY)

The resource specific payroll settings for Malaysia, are stored in the country specific fields for own legislation. To have a better understanding of the fields that are used, a view is created (the [MYHrPayroll] view) with field names that indicate better what the field represents.

Field name (MYHrPayroll)	Field name (HrPayroll)
Amount	CountryFloat2
Car_Acquisition	CountryDate1
Car_Model	Country30VarChar1
Car_Year	CountrySmallInt2
Children	CountrySmallInt1
Perc_Amt	CountryTest3
Percentage	CountryFloat1
Previous_Employer	Country30Varchar2
Sliptext1	Country70VarChar1
Sliptext2	Country70VarChar2
Sliptext3	Country70VarChar3
SOCSO_Scheme	CountryTest2
Stop_Tax_From	CountryDate2
Stop_Tax_To	CountryDate3
Tax_Branch	Country8Char1
Tax_Branch_Spouse	Country8Char2
Tax_Catg	CountryTest1

Note! Only the records where the [HrPayroll.Type] field has the value "N" and the [HrPayroll.Country] field has the value "MY" are used in the [MYHrPayroll] view.

Amount - Amount

The [MYHrPayroll.Amount] field stores the amount of salary of the first payroll calculation for semi-monthly paid employees.

Note! The [MYHrPayroll.Amount] field is only enabled when the [MYHrPayroll.Perc_amt] field is defined as amount. It is only applicable to semi-monthly paid employees.

Car_Acquisition - Car acquisition date

The [MYHrPayroll.Car_Acquisition] field stores the date when the resource's car was acquired for declaration on the EA form (code 103).

Car_Model - Car model

The [MYHrPayroll.Car_Model] field stores the resource's car model for declaration on the EA form (code 103).

Car_Year - Car year

The [MYHrPayroll.Car_Year] field stores the year the resource's car was manufactured for declaration on the EA form if the resource owned a car.

Children - Children

The [MYHrPayroll.Children] field stores the total number of children who belong to the resource and are below the age of eighteen (18) for declaration on the EA form.

Perc_Amt - Semi-monthly percentage / amount

The [MYHrPayroll.Perc_Amt] field stores a value that indicates whether to use amount or percentage for the resource payment period, when the payment period is defined as semi-monthly. The [MYHrPayroll.Perc_Amt] field refers to the DDTests table which contains the following values for this field:

Value	Description
P	Percentage
A	Amount

Note! The [MYHrPayroll.Perc_Amt] field is disabled when the resource payment period is defined as weekly, monthly and bi-weekly in the [HrPayroll.Payment_Period] field.

Percentage - Percentage

The [MYHrPayroll.Percentage] field stores the percentage of the first half salary in the first payroll calculation for semi-monthly paid employees.

Note! The [MYHrPayroll.Percentage] field is only enabled if the [MYHrPayroll.Perc_amt] field is defined as percentage. It is only applicable to semi-monthly paid employees.

Previous_Employer - Previous employer

The [MYHrPayroll.Previous_Employer] field stores any information of the resource's previous employer such as employer's name. The information stored in the [MYHrPayroll.Previous_Employer] field is used in the EA form.

Note! The [MYHrPayroll.Previous_Employer] field is enabled only if the resource did not work for the whole year.

Sliptext1 - Pay slip text 1

The [MYHrPayroll.Sliptext1] is the first field that stores any payroll slip information. The [MYHrPayroll.Sliptext1] field is not used yet. It is added for future functionality.

Sliptext2 - Pay slip text 2

The [MYHrPayroll.Sliptext2] is the second field that stores any payroll slip information. The [MYHrPayroll.Sliptext2] field is not used yet. It is added for future functionality.

Sliptext3 - Pay slip text 3

The [MYHrPayroll.Sliptext3] is the third field that stores any payroll slip information. The [MYHrPayroll.Sliptext3] field is not used yet. It is added for future functionality.

SOCSO_Scheme - SOCSO scheme

The [MYHrPayroll.SOCSO_Scheme] field stores the SOCSO (Social Security Organization) scheme of a resource's SOCSO contribution. The [MYHrPayroll.SOCSO_Scheme] field refers to the DDTests table which contains the following values for this field:

Value	Description
E	Employment injury and invalidity
I	Employment injury only

Stop_Tax_From - Start date of tax exemption

The [MYHrPayroll.Stop_Tax_From] field stores the start date of the tax exemption of a resource tax contribution.

Stop_Tax_To - End date of tax exemption

The [MYHrPayroll.Stop_Tax_To] field stores the end date of the tax exemption of a resource tax contribution.

Tax_Branch - Tax branch

The [MYHrPayroll.Tax_Branch] field stores the employee's income tax branch for declaration. The [MYHrPayroll.Tax_Branch] field can have one of the following values.

Value	Description
AS	Alor Setar
BI	Bintulu
BM	Bukit Mertajam
CH	Cheras
DU	Jalan Duta
IP	Ipoh
JB	Johor Bharu
KP	Kg. Attap
KB	Kota Bharu
KC	Kuching
KA	Kluang
KK	Kota Kinabalu
KG	Klang
KN	Kuantan
KR	Kangan

Value	Description
KT	Kuala Terengganu
KE	Keningau
LA	Labuan
ME	Melaka
MR	Miri
MU	Muar
PJ	Petaling Jaya
PP	Pulau Pinang
RB	Raub
SI	Sibu
SD	Sandakan
SA	Shah Alam
SP	Sungai Petani
SR	Seremban
SY	Syarikat
TP	Taiping
TM	Temerloh
TW	Tawau
TI	Teluk Intan
TB	Tidak Bermastautin
WM	Wangsa Maju

Tax_Branch_Spouse - Tax branch spouse

The [MYHrPayroll.Tax_Branch_Spouse] field stores the resource's spouse's income tax branch for declaration. The [MYHrPayroll.Tax_Branch_Spouse] field can have one of the following values.

Value	Description
AS	Alor Setar
BI	Bintulu
BM	Bukit Mertajam
CH	Cheras
DU	Jalan Duta
IP	Ipoh
JB	Johor Bharu
KP	Kg. Attap

Value	Description
KB	Kota Bharu
KC	Kuching
KA	Kluang
KK	Kota Kinabalu
KG	Klang
KN	Kuantan
KR	Kangan
KT	Kuala Terengganu
KE	Keningau
LA	Labuan
ME	Melaka
MR	Miri
MU	Muar
PJ	Petaling Jaya
PP	Pulau Pinang
RB	Raub
SI	Sibu
SD	Sandakan
SA	Shah Alam
SP	Sungai Petani
SR	Seremban
SY	Syarikat
TP	Taiping
TM	Temerloh
TW	Tawau
TI	Teluk Intan
TB	Tidak Bermastautin
WM	Wangsa Maju

Tax_Catg - Tax category

The [MYHrPayroll.Tax_Catg] field stores the tax category of a resource's tax contribution. The values stored in the [MYHrPayroll.Tax_Catg] field will effect the tax calculation. The [MYHrPayroll.Tax_Catg] field refers to the DDTests table which contains the following values for this field:

Value	Description
1	Single
2	Married and spouse not working
3	Married and both are working

50.6 Country specific field details - Middle East (AE)

The resource specific payroll settings for Middle East are stored in the country specific fields for own legislation. In order to have a better understanding of the fields that are used, a view is created (the [AEHrPayroll] view) with field names that indicate better what the field represents.

The table below lists the fields that are documented in this section.

Field name (AEHrPayroll)	Field name (HrPayroll)
Amount	CountryFloat3
Check	CountryTest2
Contractterminated	CountryNoYes1
GES	CountryFloat1
ID	ID
IncludeContribution	CountryNoYes3
PaymentVacation	CountryNoYes2
Percentage	CountryFloat2
RatioAmount	CountryTest3
resident_status	CountryTest1
UnpaidLeave	Country8Char1

Amount - Amount

The [AEHrPayroll.Amount] field stores the amount for the check of the minimum salary alert.

Note! This field is enabled if "Check" equals to "Minimum salary".

Check - Check

The [AEHrPayroll.Check] field stores the check for the minimum salary alert. This field refers to the DDTests table which contains the following values:

Value	Description
A	N/A
D	Deduction against salary
M	Minimum salary
N	Net pay against salary

Contractterminated - Employment terminated

The [AEHrPayroll.Contractterminated] field stores a value that determines whether the resource's employment is terminated by the employer or otherwise. The [AEHrPayroll.Contractterminated] field can have one of the following values:

Value	Remarks
0	Resource resigned from company with indemnity benefit calculated based on the total termination percentage specified in the [HrComponents.Country_float10] field. The resource must also work more than the terminate service year specified in the [HrComponents.Country_float11] field.
1	Resource employment terminated by employer with full percentage of indemnity benefit.

The [AEHrPayroll.Contractterminated] field is enabled for components with subtype "1950" (at the [HrComponents.Comp_sub_type] field).

Note! The [AEHrPayroll.Contractterminated] field is filled only if the country code is set to "Kuwait" in the company data settings.

GES - + GES

The [AEHrPayroll.GES] field stores the Government employee support fund/allowance (GES) amount per resource level. This GES amount is paid directly from government to employee as part of the base value for the pension calculation.

Note! This field will only be enabled when the "Resident status" is "Local".

IncludeContribution - Include contribution

The [AEHrPayroll.IncludeContribution] field indicates whether to include the social contribution as part of the ratio check for the check of the minimum salary alert. This field has the following values:

Value	Description
0	No
1	Yes

Note! This field is enabled if "Check" equals to "Deduction against salary".

PaymentVacation - Vacation payment

The [AEHrPayroll.PaymentVacation] field indicates whether to enable or disable the vacation payment for the related resources. This field has the following values:

Value	Description
0	No
1	Yes

Note! This field is only enabled if no payroll calculation process has been performed for the particular period, where the [HrComp_Trans.Status] field must be 'O' (Open) and ≠ ('C' (Calculated), 'A' (Authorized), or 'P' (Processed)).

Percentage - %

The [AEHrPayroll.Percentage] field stores the percentage for the check of the minimum salary alert.

Note! This field is enabled if "Check" equals to "Deduction against salary" or "Net pay against salary".

RatioAmount - Ratio/Amount

The [AEHrPayroll.RatioAmount] field stores the ratio or amount for the check of the minimum salary alert. This field refers to the DDTests table which contains the following values:

Value	Description
E	Equal to
G	Greater than
L	Less than
R	Greater than or equal to
T	Less than or equal to

Note! If "Check" equals to "Deduction against salary" or "Net pay against salary", the caption displayed is "Ratio. If "Check" equals to "Minimum salary", the caption displayed is "Amount". This field is disabled if "Check" equals to "N/A".

Resident_status - Resident status

The [AEHrPayroll.Resident_status] field stores the resource's resident status. The [AEHrPayroll.Resident_status] field can have one of the following values:

Value	Description
L	Local
E	Expatriate

UnpaidLeave - Unpaid leave

The [AEHrPayroll.Unpaid_leave_code] field stores the unpaid leave code for component with subtype "1200" (stored in the [HrComponents.Comp_sub_type] field). The unpaid leave component is attached to a particular resource when the resource takes unpaid leave. The [AEHrPayroll.Unpaid_leave_code] field is only filled for component with subtype "1200" and if it is paid by employee (at the [HrComponents.paid_by] field with value "E").



Chapter 51 | HrPayrollDeclarations - HrPayrollDeclarations

51. HrPayrollDeclarations - HrPayrollDeclarations

51.1 General description

The [HrPayrollDeclarations] table stores the declared data to a third party. This table is generic but completely country depended. The country together with the type will determine the country fields. A number of fields are generic though to create a generic index on this table.

51.2 HrPayrollDeclarations field details

Country - Country

The [HrPayrollDeclarations.Country] field stores the country code.

CountryDate1 - CountryDate1

The [HrPayrollDeclarations.CountryDate1] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate10 - CountryDate10

The [HrPayrollDeclarations.CountryDate10] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate2 - CountryDate2

The [HrPayrollDeclarations.CountryDate2] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate3 - CountryDate3

The [HrPayrollDeclarations.CountryDate3] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate4 - CountryDate4

The [HrPayrollDeclarations.CountryDate4] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate5 - CountryDate5

The [HrPayrollDeclarations.CountryDate5] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate6 - CountryDate6

The [HrPayrollDeclarations.CountryDate6] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate7 - CountryDate7

The [HrPayrollDeclarations.CountryDate7] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate8 - CountryDate8

The [HrPayrollDeclarations.CountryDate8] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryDate9 - CountryDate9

The [HrPayrollDeclarations.CountryDate9] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat1 - CountryFloat1

The [HrPayrollDeclarations.CountryFloat1] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat10 - CountryFloat10

The [HrPayrollDeclarations.CountryFloat10] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat11 - CountryFloat11

The [HrPayrollDeclarations.CountryFloat11] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat12 - CountryFloat12

The [HrPayrollDeclarations.CountryFloat12] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat13 - CountryFloat13

The [HrPayrollDeclarations.CountryFloat13] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat14 - CountryFloat14

The [HrPayrollDeclarations.CountryFloat14] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat15 - CountryFloat15

The [HrPayrollDeclarations.CountryFloat15] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat16 - CountryFloat16

The [HrPayrollDeclarations.CountryFloat16] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat17 - CountryFloat17

The [HrPayrollDeclarations.CountryFloat17] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat18 - CountryFloat18

The [HrPayrollDeclarations.CountryFloat18] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat19 - CountryFloat19

The [HrPayrollDeclarations.CountryFloat19] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat2 - CountryFloat2

The [HrPayrollDeclarations.CountryFloat2] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat20 - CountryFloat20

The [HrPayrollDeclarations.CountryFloat20] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat21 - CountryFloat21

The [HrPayrollDeclarations.CountryFloat21] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat22 - CountryFloat22

The [HrPayrollDeclarations.CountryFloat22] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat23 - CountryFloat23

The [HrPayrollDeclarations.CountryFloat23] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat24 - CountryFloat24

The [HrPayrollDeclarations.CountryFloat24] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat25 - CountryFloat25

The [HrPayrollDeclarations.CountryFloat25] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat26 - CountryFloat26

The [HrPayrollDeclarations.CountryFloat26] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat27 - CountryFloat27

The [HrPayrollDeclarations.CountryFloat27] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat28 - CountryFloat28

The [HrPayrollDeclarations.CountryFloat28] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat29 - CountryFloat29

The [HrPayrollDeclarations.CountryFloat29] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat3 - CountryFloat3

The [HrPayrollDeclarations.CountryFloat3] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat30 - CountryFloat30

The [HrPayrollDeclarations.CountryFloat30] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat31 - CountryFloat31

The [HrPayrollDeclarations.CountryFloat31] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat32 - CountryFloat32

The [HrPayrollDeclarations.CountryFloat32] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat33 - CountryFloat33

The [HrPayrollDeclarations.CountryFloat33] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat34 - CountryFloat34

The [HrPayrollDeclarations.CountryFloat34] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat35 - CountryFloat35

The [HrPayrollDeclarations.CountryFloat35] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat36 - CountryFloat36

The [HrPayrollDeclarations.CountryFloat36] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat37 - CountryFloat37

The [HrPayrollDeclarations.CountryFloat37] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat38 - CountryFloat38

The [HrPayrollDeclarations.CountryFloat38] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat39 - CountryFloat39

The [HrPayrollDeclarations.CountryFloat39] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat4 - CountryFloat4

The [HrPayrollDeclarations.CountryFloat4] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat40 - CountryFloat40

The [HrPayrollDeclarations.CountryFloat40] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat41 - CountryFloat41

The [HrPayrollDeclarations.CountryFloat41] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat42 - CountryFloat42

The [HrPayrollDeclarations.CountryFloat42] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat43 - CountryFloat43

The [HrPayrollDeclarations.CountryFloat43] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat44 - CountryFloat44

The [HrPayrollDeclarations.CountryFloat44] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat45 - CountryFloat45

The [HrPayrollDeclarations.CountryFloat45] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat46 - CountryFloat46

The [HrPayrollDeclarations.CountryFloat46] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat47 - CountryFloat47

The [HrPayrollDeclarations.CountryFloat47] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat48 - CountryFloat48

The [HrPayrollDeclarations.CountryFloat48] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat49 - CountryFloat49

The [HrPayrollDeclarations.CountryFloat49] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat5 - CountryFloat5

The [HrPayrollDeclarations.CountryFloat5] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat50 - CountryFloat5

The [HrPayrollDeclarations.CountryFloat50] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat51 - CountryFloat51

The [HrPayrollDeclarations.CountryFloat51] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat52 - CountryFloat52

The [HrPayrollDeclarations.CountryFloat52] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat53 - CountryFloat53

The [HrPayrollDeclarations.CountryFloat53] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat54 - CountryFloat54

The [HrPayrollDeclarations.CountryFloat54] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat55 - CountryFloat55

The [HrPayrollDeclarations.CountryFloat55] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat56 - CountryFloat56

The [HrPayrollDeclarations.CountryFloat56] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat57 - CountryFloat57

The [HrPayrollDeclarations.CountryFloat57] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat58 - CountryFloat58

The [HrPayrollDeclarations.CountryFloat58] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat59 - CountryFloat59

The [HrPayrollDeclarations.CountryFloat59] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat6 - CountryFloat6

The [HrPayrollDeclarations.CountryFloat6] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat60 - CountryFloat60

The [HrPayrollDeclarations.CountryFloat60] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat7 - CountryFloat7

The [HrPayrollDeclarations.CountryFloat7] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat8 - CountryFloat8

The [HrPayrollDeclarations.CountryFloat8] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryFloat9 - CountryFloat9

The [HrPayrollDeclarations.CountryFloat9] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt1 - CountryInt1

The [HrPayrollDeclarations.CountryInt1] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt10 - CountryInt10

The [HrPayrollDeclarations.CountryInt10] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt2 - CountryInt2

The [HrPayrollDeclarations.CountryInt2] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt3 - CountryInt3

The [HrPayrollDeclarations.CountryInt3] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt4 - CountryInt4

The [HrPayrollDeclarations.CountryInt4] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt5 - CountryInt5

The [HrPayrollDeclarations.CountryInt5] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt6 - CountryInt6

The [HrPayrollDeclarations.CountryInt6] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt7 - CountryInt7

The [HrPayrollDeclarations.CountryInt7] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt8 - CountryInt8

The [HrPayrollDeclarations.CountryInt8] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryInt9 - CountryInt9

The [HrPayrollDeclarations.CountryInt9] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes1 - CountryNoYes1

The [HrPayrollDeclarations.CountryNoYes1] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes11 - CountryNoYes11

The [HrPayrollDeclarations.CountryNoYesNoYes11] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes12 - CountryNoYes12

The [HrPayrollDeclarations.CountryNoYes12] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes13 - CountryNoYes13

The [HrPayrollDeclarations.CountryNoYes13] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes14 - CountryNoYes14

The [HrPayrollDeclarations.CountryNoYes14] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes15 - CountryNoYes15

The [HrPayrollDeclarations.CountryNoYes15] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes16 - CountryNoYes16

The [HrPayrollDeclarations.CountryNoYes16] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes17 - CountryNoYes17

The [HrPayrollDeclarations.CountryNoYes17] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes18 - CountryNoYes18

The [HrPayrollDeclarations.CountryNoYes18] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes19 - CountryNoYes19

The [HrPayrollDeclarations.CountryNoYes19] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes2 - CountryNoYes2

The [HrPayrollDeclarations.CountryNoYes2] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes20 - CountryNoYes20

The [HrPayrollDeclarations.CountryNoYes20] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes3 - CountryNoYes3

The [HrPayrollDeclarations.CountryNoYes3] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes4 - CountryNoYes4

The [HrPayrollDeclarations.CountryNoYes4] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes5 - CountryNoYes5

The [HrPayrollDeclarations.CountryNoYes5] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes6 - CountryNoYes6

The [HrPayrollDeclarations.CountryNoYes6] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes7 - CountryNoYes7

The [HrPayrollDeclarations.CountryNoYes7] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes8 - CountryNoYes8

The [HrPayrollDeclarations.CountryNoYes8] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryNoYes9 - CountryNoYes9

The [HrPayrollDeclarations.CountryNoYes9] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest1 - CountryTest1

The [HrPayrollDeclarations.CountryTest1] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest11 - CountryTest11

The [HrPayrollDeclarations.CountryTest11] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest12 - CountryTest12

The [HrPayrollDeclarations.CountryTest12] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest13 - CountryTest13

The [HrPayrollDeclarations.CountryTest13] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest14 - CountryTest14

The [HrPayrollDeclarations.CountryTest14] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest15 - CountryTest15

The [HrPayrollDeclarations.CountryTest15] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest16 - CountryTest16

The [HrPayrollDeclarations.CountryTest16] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest17 - CountryTest17

The [HrPayrollDeclarations.CountryTest17] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest18 - CountryTest18

The [HrPayrollDeclarations.CountryTest18] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest19 - CountryTest19

The [HrPayrollDeclarations.CountryTest19] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest2 - CountryTest2

The [HrPayrollDeclarations.CountryTest2] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest20 - CountryTest20

The [HrPayrollDeclarations.CountryTest20] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest3 - CountryTest3

The [HrPayrollDeclarations.CountryTest3] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest4 - CountryTest4

The [HrPayrollDeclarations.CountryTest4] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest5 - CountryTest5

The [HrPayrollDeclarations.CountryTest5] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest6 - CountryTest6

The [HrPayrollDeclarations.CountryTest6] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest7 - CountryTest7

The [HrPayrollDeclarations.CountryTest7] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest8 - CountryTest8

The [HrPayrollDeclarations.CountryTest8] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryTest9 - CountryTest9

The [HrPayrollDeclarations.CountryTest9] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar1 - CountryVarchar1

The [HrPayrollDeclarations.CountryVarchar1] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar10 - CountryVarchar10

The [HrPayrollDeclarations.CountryVarchar10] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar11 - CountryVarchar11

The [HrPayrollDeclarations.CountryVarchar11] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar12 - CountryVarchar12

The [HrPayrollDeclarations.CountryVarchar12] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar13 - CountryVarchar13

The [HrPayrollDeclarations.CountryVarchar13] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar14 - CountryVarchar14

The [HrPayrollDeclarations.CountryVarchar14] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar15 - CountryVarchar15

The [HrPayrollDeclarations.CountryVarchar15] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar16 - CountryVarchar16

The [HrPayrollDeclarations.CountryVarchar16] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar17 - CountryVarchar17

The [HrPayrollDeclarations.CountryVarchar17] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar18 - CountryVarchar18

The [HrPayrollDeclarations.CountryVarchar18] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar19 - CountryVarchar19

The [HrPayrollDeclarations.CountryVarchar19] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar2 - CountryVarchar2

The [HrPayrollDeclarations.CountryVarchar2] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar20 - CountryVarchar20

The [HrPayrollDeclarations.CountryVarchar20] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar21 - CountryVarchar21

The [HrPayrollDeclarations.CountryVarchar21] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar22 - CountryVarchar22

The [HrPayrollDeclarations.CountryVarchar22] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar23 - CountryVarchar23

The [HrPayrollDeclarations.CountryVarchar23] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar24 - CountryVarchar24

The [HrPayrollDeclarations.CountryVarchar24] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar25 - CountryVarchar25

The [HrPayrollDeclarations.CountryVarchar25] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar26 - CountryVarchar26

The [HrPayrollDeclarations.CountryVarchar26] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar27 - CountryVarchar27

The [HrPayrollDeclarations.CountryVarchar27] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar28 - CountryVarchar28

The [HrPayrollDeclarations.CountryVarchar28] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar29 - CountryVarchar29

The [HrPayrollDeclarations.CountryVarchar29] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar3 - CountryVarchar3

The [HrPayrollDeclarations.CountryVarchar3] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar30 - CountryVarchar30

The [HrPayrollDeclarations.CountryVarchar30] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar4 - CountryVarchar4

The [HrPayrollDeclarations.CountryVarchar4] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar5 - CountryVarchar5

The [HrPayrollDeclarations.CountryVarchar5] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar6 - CountryVarchar6

The [HrPayrollDeclarations.CountryVarchar6] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar7 - CountryVarchar7

The [HrPayrollDeclarations.CountryVarchar7] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar8 - CountryVarchar8

The [HrPayrollDeclarations.CountryVarchar8] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

CountryVarchar9 - CountryVarchar9

The [HrPayrollDeclarations.CountryVarchar9] field is used to store country specific declaration settings. Per country a different set of values applies to this field. For more information see the Country specific section(s).

Division - Division

The [HrPayrollDeclarations.Division] field stores the company code of the current logon. The [HrPayrollDeclarations.Division] field stores the numeric value of the [Bedryf.Bednr] field. This field is not used yet. It is added for future functionality.

DocAttachmentID - DocAttachmentID

The [HrPayrollDeclarations.DocAttachmentID] field stores the reference (ID) to the document that contains the XML file in the [BacoDiscussions] table.

Frequency - Frequency

The [HrPayrollDeclarations.Frequency] field stores the frequency of the declaration. The possible values are as the following:

Value	Description
A	Annual
H	Half yearly
V	4-weekly
M	Monthly

ID - ID

The [HrPayrollDeclarations.ID] field stores the system generated database record identification number. This field is not functionally used.

PayrollYear - PayrollYear

The [HrPayrollDeclarations.PayrollYear] field stores the payroll year that refers to the declaration line.

Period - Period

The [HrPayrollDeclarations.Period] field stores the period of the declaration according to the frequency.

ProcessDate - ProcessDate

The [HrPayrollDeclarations.ProcessDate] field stores the process date of the declaration.

Reference - Reference

The [HrPayrollDeclarations.Reference] field stores the external reference of the declaration. This reference can for example be used for payments to the third party or used in the communication with the third party.

ReferenceNumber - ReferenceNumber

The [HrPayrollDeclarations.ReferenceNumber] field stores the external reference number that identifies the company to the third party. For example, a tax income number or a relation number.

Res_id - Res_id

The [HrPayrollDeclarations.Res_id] field stores the ID of the resource for which the declaration line is created.

Sequence - Sequence

The [HrPayrollDeclarations.Sequence] field stores the sequence of the declaration within the period. This field is used to identify the different declaration of the same type within the same period. For example, first a regular declaration (sequence 1) is done and then a correction declaration (sequence 2).

Status - Status

The [HrPayrollDeclarations.Status] field stores the status of the created declaration. The possible values are as the following:

Value	Description
C	Created (or Open)
P	Processed

Syscreated - Created date and time

The [HrPayrollDeclarations.Syscreated] field stores the date and time that the tax declaration has been created.

Syscreator - Creator

The [HrPayrollDeclarations.Syscreator] field stores the ID of the resource who created the tax declaration. The [HrPayrollDeclarations.Syscreator] field refers to the [Humres.Res_ID] field.

Sysguid - SysGuid

The [HrPayrollDeclarations.SysGuid] field stores the Guid ID generated by the system upon creation of the tax declaration.

Sysmodified - Modified date and time

The [HrPayrollDeclarations.Sysmodified] field stores the date and time that the tax declaration was last modified. Initially, this field contains the creation date, which is stored in the [HrPayrollDeclarations.Syscreated] field.

Sysmodifier - Modifier

The [HrPayrollDeclarations.Sysmodifier] field stores the ID of the resource who last modified the tax declaration. Initially, this field contains the creator as is stored in the [HrPayrollDeclarations.Syscreator] field. The [HrPayrollDeclarations.Sysmodifier] field refers to the [Humres.Res_ID] field.

Timestamp - Timestamp

The [HrPayrollDeclarations.Timestamp] field contains a system generated timestamp. The timestamp field is regenerated upon every change in the tax declaration. This field is mainly used for replication purposes.

Type - Type

The [HrPayrollDeclarations.Type] field stores the type that identifies the declaration. The combination of country and declaration type will determine the content of the declaration lines.

Version - Version

The [HrPayrollDeclarations.Vesion] field stores the version of the declaration.

51.3 Country specific field details - Netherlands (NL)

The declaration settings of Loonaangifte for the Netherlands, are stored in the country specific fields for own legislation.

Country - Country

The [HrPayrollDeclarations.Country] field stores the fixed value 'NL'.

CountryDate1 - Datum aanvang tijdvak

The [HrPayrollDeclarations.CountryDate1] field stores the start date of the declaration period. This is determined based on the current payroll year, declaration frequency and the declaration period:

- Declaration frequency monthly: always the first of the month
- Declaration frequency 4-weekly:
 - Declaration period 1: yyyy-01-01
 - Declaration period 2: Monday of the first week + 28 days
 - Declaration period 3: Monday of the first week + 56 days
 - Declaration period 4: etc
- Declaration frequency half-yearly:
 - Declaration period 1: yyyy-01-01
 - Declaration period 2: yyyy-07-01
- Declaration frequency annually: always yyyy-01-01

Note!

- The first week is the week that contains the first Thursday of the current payroll year.
- This field is applicable for Tijdvakaangifte.

CountryDate2 - Datum einde tijdvak

The [HrPayrollDeclarations.CountryDate2] field stores the end date of the declaration period. This is determined based on the current payroll year, declaration frequency and declaration period:

- Declaration frequency monthly: always the last day of the month
- Declaration frequency 4-weekly:
 - Declaration 1: Monday of the first week + 27 days
 - Declaration 2: Monday of the first week + 55 days
 - Declaration 3: Monday of the first week + 83 days
 - Declaration 4: etc
 - Declaration period 12: always yyyy-12-31
- Declaration frequency half-yearly:
 - Declaration period 1: yyyy-06-30
 - Declaration period 2: yyyy-12-31
- Declaration frequency annually: always yyyy-12-31

Note!

- The first week is the week that contains the first Thursday of the current payroll year.
- This field is applicable for Tijdvakaangifte.

CountryDate3 - Datum aanvang tijdvak

The [HrPayrollDeclarations.CountryDate3] field stores the start date of the employment initially is the start date of the resource. If the check box 'Afwijkende datum' is checked then the start date is taken from the payroll data. The value is retrieved from the [Humres.ldatindienst] field or the [HrPayroll.CountryDate8] field if the [HrPayroll.CountryNoYes16] field = 1.

Note! This field is applicable for Inkomstenverhouding.

CountryDate4 - Datum einde inkomstenvermindering

The [HrPayrollDeclarations.CountryDate4] field stores the end date of the employment initially is the end date of the resource. If the check box 'Afwijkende datum' is checked then the end date is taken from the payroll data. The value is retrieved from the [Humres.Cont_end_date] or the [HrPayroll.CountryDate9] field if the [HrPayroll.CountryNoYes16] field = 1.

Note! This field is applicable for Inkomstenverhouding.

CountryDate5 - Datum aanvang inkomstenperiode

The [HrPayrollDeclarations.CountryDate5] field initially stores the same date as the start date of the declaration period. If the employee starts within the declaration period then this date will be equal to the start date of the employment of the employee.

Note! This field is applicable for Inkomstenperiode.

CountryFloat1 - Loon Lb/Ph / Totaal loon Lb/Ph

The [HrPayrollDeclarations.CountryFloat1] field stores the following values:

Loon Lb/Ph: The [HrPayrollDeclarations.CountryFloat1] field stores the definition same as column 14 of the loonstaat. The amounts of the flowing subtypes are taken into account for the determination of this field:

1000, 1010, 1015, 1020, 1030, 1200, 1210, 1320, 1322, 1323, 1400, 1401, 1402, 1500, 1510, 1700, 1801, 1811, 1840, 1850, 1860, 1950, 1960, 2000, 2100, 2150, 2160, 2170, 2180, 2200, 2220, 2230, 2300, 2310, 2320, 2400, 2500, 2531, 2902.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens,

Totaal loon Lb/Ph: The [HrPayrollDeclarations.CountryFloat1] field stores the total of the 'Loon Lb/Ph' field in the declaration period.

Note! This field is applicable for Collectieve aangifte.

CountryFloat10 - Premieloon Wachtgeldfonds

The [HrPayrollDeclarations.CountryFloat10] field stores the total base value of the 'PremieWA' within the declaration period.

Note! This field is applicable for Specificatie wachtgeldfondspremie (Wgf).

CountryFloat11 - Premie Wachtgeldfonds / Premie sectorfonds

The [HrPayrollDeclarations.CountryFloat11] field stores the following values:

- The [HrPayrollDeclarations.CountryFloat11] field stores the amount determined based on the subtype 2501.
Note! The 'Premie Wachtgeldfonds' field is applicable for Nominatieve aangifte and the 'Premie sectorfonds' field is applicable as from 2007 for Werknemergegevens.
- The [HrPayrollDeclarations.CountryFloat11] field stores the total base value of the 'PremieWA' within the declaration period.
Note! The 'Premie Wachtgeldfonds' field is applicable for Specificatie wachtgeldfondspremie (Wgf).

CountryFloat12 - Premieloon UFO

The [HrPayrollDeclarations.CountryFloat12] field stores the total base value of the 'Premie UFO' within the declaration period. See also the [HrPayrollDeclarations.CountryFloat13] field.

Note! This field is applicable for Collectieve aangifte.

CountryFloat13 - Premie UFO / Totaalpremie UFO

The [HrPayrollDeclarations.CountryFloat13] field stores the following values:

Premie UFO: The [HrPayrollDeclarations.CountryFloat13] field stores the amount determined based on the subtype 2401 and the field 'Soort regeling'. If this field is set to 'UFO premie' then amount entered on this component must be taken into account.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

Totaalpremie UFO: The [HrPayrollDeclarations.CountryFloat13] field stores the total amount of the 'Premie UFO' within the declaration period.

Note! This field is applicable for Collectieve aangifte.

CountryFloat14 - Ingehouden bijdrage Zvw / Totaal ingehouden bijdragen Zvw

The [HrPayrollDeclarations.CountryFloat14] field stores the following values:

Ingehouden bijdrage Zvw: The [HrPayrollDeclarations.CountryFloat14] field stores the amount determined based on the subtype 2530.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Wernemergegevens.

Totaal ingehouden bijdragen Zvw: The [HrPayrollDeclarations.CountryFloat14] field stores the total amount of the 'ZVW bijdrage' within the declaration period.

Note! This field is applicable for Collectieve aangifte.

CountryFloat15 - Bedrag vergoeding Zvw door inhoudingsplichtige / Totaalbedrag vergoeding Zvw

The [HrPayrollDeclarations.CountryFloat15] field stores the following values:

Bedrag vergoeding Zvw door inhoudingsplichtige: The [HrPayrollDeclarations.CountryFloat15] field stores the amount determined based on the subtype 2531.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

Totaalbedrag vergoeding Zvw: The [HrPayrollDeclarations.CountryFloat15] field stores the total amount of the 'ZVW vergoeding' within the declaration period.

Note! This field is applicable for Collectieve aangifte.

CountryFloat16 - Ingehouden loonbelasting/premie volksverzekeringen

The [HrPayrollDeclarations.CountryFloat16] field stores the following values:

- The [HrPayrollDeclarations.CountryFloat16] field stores the amount determined based on a number of tax components. The following subtypes are involved: 3000, 3010, 3020, 3030.
Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.
- The [HrPayrollDeclarations.CountryFloat16] field stores the total amount of the 'Loonheffing' within the declaration period.
Note! This field is applicable for Collectieve aangifte.

CountryFloat17 - Verrekende arbeidskorting

The [HrPayrollDeclarations.CountryFloat17] field stores the amount determined based on the subtype 3010.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat18 - Eindheffing publiekrechtelijke uitkeringen

The [HrPayrollDeclarations.CountryFloat18] field stores the total amount of the 'Eindheffing' within the declaration period (subtype 3137).

Note! This field is applicable for Collectieve aangifte.

CountryFloat19 - Eindheffing loon met een bestemmingskarakter

The [HrPayrollDeclarations.CountryFloat19] field stores the total amount of the 'Eindheffing loon met een bestemmingskarakter' within the declaration period (subtype 3136).

Note! This field is applicable for Collectieve aangifte.

CountryFloat2 - Loon SV / Totaal loon SV

The [HrPayrollDeclarations.CountryFloat2] field stores the following values:

Loon SV: The [HrPayrollDeclarations.CountryFloat2] field stores the definition same as column 8 of the loonstaat. The amounts of the following subtypes are taken into account for determination of this field:

1000, 1010, 1015, 1020, 1030, 1320, 1322, 1323, 1400, 1500, 1511, 1801, 1811, 1840, 1850, 1860, 1950, 1960, 2000, 2100, 2150, 2160, 2170, 2180, 2200, 2220, 2230, 2300, 2310, 2320, 2400.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

Totaal loon SV: The [HrPayrollDeclarations.CountryFloat2] field stores the total of all Loon SV fields in the declaration period.

Note! This field is applicable for Collectieve aangifte.

CountryFloat20 - Eindheffing spaarloon

The [HrPayrollDeclarations.CountryFloat20] field stores the total amount of the 'Eindheffing spaarloon' within the declaration period (subtype 3500).

Note! This field is applicable for Collectieve aangifte.

CountryFloat21 - Eindheffing spaarpremie

The [HrPayrollDeclarations.CountryFloat21] field stores the total amount of the 'Eindheffing premiespaarloon' within the declaration period (subtype 3501).

Note! This field is applicable for Collectieve aangifte.

CountryFloat22 - Eindheffing moeilijk te individualiseren loon

The [HrPayrollDeclarations.CountryFloat22] field stores the total amount of the 'Eindheffing loon in natura' within the declaration period (subtype 3135).

Note! This field is applicable for Collectieve aangifte.

CountryFloat23 - Eindheffing geschenken bij feestdagen

The [HrPayrollDeclarations.CountryFloat23] field stores the total amount of the 'Eindheffing geschenken bij feestdagen' within the declaration period (subtype 3138).

Note! This field is applicable for Collectieve aangifte.

CountryFloat24 - Eindheffing bovenmatige kostenvergoeding

The [HrPayrollDeclarations.CountryFloat24] field stores the total amount of the 'Eindheffing bovenmatige vergoeding/verstrekking' within the declaration period (subtype 3139).

Note! This field is applicable for Collectieve aangifte.

CountryFloat25 - Eindheffing VUT

The [HrPayrollDeclarations.CountryFloat25] field stores the total amount of the 'Eindheffing bovenmatige vergoeding/verstrekking' within the declaration period (subtype 3140).

Note! This field is applicable for Collectieve aangifte.

CountryFloat26 - Afdrachtvermindering betaald ouderschapsverlof / Eindheffing doorlopend afwisselend gebruik bestelauto

The [HrPayrollDeclarations.CountryFloat26] field stores the following values:

Afdrachtvermindering betaald ouderschapsverlof: The [HrPayrollDeclarations.CountryFloat26] field stores the total amount of the 'Vermindering betaald ouderschapsverlof' within the declaration period (subtype 3132).

Note! This field is applicable until 2006 for Collectieve aangifte.

Eindheffing doorlopend afwisselend gebruik bestelauto: The [HrPayrollDeclarations.CountryFloat26] field stores the total amount of the 'Eindheffing bestelauto' within the declaration period (subtype 3141).

Note! This field is applicable as from 2007 for Collectieve aangifte.

CountryFloat27 - Afdrachtvermindering langdurig werklozen / Verstrekte aanvulling op arbeidsongeschiktheidsuitkering / Toegepast bedrag levensloopverlofkorting

The [HrPayrollDeclarations.CountryFloat27] field stores the following values:

Afdrachtvermindering langdurig werklozen: The [HrPayrollDeclarations.CountryFloat27] field stores the total amount of the 'Vermindering langdurig werklozen' within the declaration period (subtype 3110).

Note! This field is applicable until 2006 for Collectieve aangifte.

Verstrekte aanvulling op arbeidsongeschiktheidsuitkering: The [HrPayrollDeclarations.CountryFloat27] field stores the amount entered in the 'Bedrag aanvulling' field in the payroll details. The value is retrieved from the [HrPayroll.CountryInt1] ([NLHrPayroll.Ydec_payment_amt]) field.

Note! This field is applicable as from 2007 for Werknemergegevens.

CountryFloat28 - Afdrachtvermindering arbo non-profit

The [HrPayrollDeclarations.CountryFloat28] field stores the total amount of the 'Vermindering arbo non-profit' within the declaration period (subtype 3133).

Note! This field is applicable for Collectieve aangifte.

CountryFloat29 - Afdrachtvermindering zeevaart

The [HrPayrollDeclarations.CountryFloat29] field stores the total amount of the 'Vermindering zeevaart' within the declaration period (subtype 3134).

Note! This field is applicable for Collectieve aangifte.

CountryFloat3 - Loon belast volgens tabel bijzondere beloningen / Afdrachtvermindering onderwijs

The [HrPayrollDeclarations.CountryFloat3] field stores the following values:

Loon belast volgens tabel bijzondere beloningen: The [HrPayrollDeclarations.CountryFloat3] field stores the definition same as column 14 of the loonstaat where the type of the transaction is special. The amounts of the following subtypes are taken into account for determination of this field:

1000, 1010, 1015, 1020, 1030, 1200, 1210, 1320, 1322, 1323, 1400, 1401, 1402, 1500, 1510, 1700, 1801, 1811, 1840, 1850, 1860, 1950, 1960, 2000, 2100, 2150, 2160, 2170, 2180, 2200, 2220, 2230, 2300, 2310, 2320, 2400, 2500, 2531, 2902.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

Afdrachtvermindering onderwijs: The [HrPayrollDeclarations.CountryFloat3] field stores the total amount of the 'Vermindering onderwijs' within the declaration period (subtype 3120).

Note! This field is applicable as from 2007 for Collectieve aangifte.

CountryFloat30 - Afdrachtvermindering onderwijs

The [HrPayrollDeclarations.CountryFloat30] field stores the total amount of the 'Vermindering onderwijs' within the declaration period (subtype 3120).

Note! This field is applicable for Collectieve aangifte.

CountryFloat31 - Voorlopige afdrachtvermindering S&O / Afdrachtvermindering S&O

The [HrPayrollDeclarations.CountryFloat31] field stores the S&O verklaring amount within the declaration period.

Note! The field caption 'Voorlopige afdrachtvermindering S&O' is applicable until 2006 for Collectieve aangifte.

The field caption 'Afdrachtvermindering S&O' is applicable as from 2007 for Collectieve aangifte.

CountryFloat32 - Arbeidsgehandicaptenkorting

The [HrPayrollDeclarations.CountryFloat32] field stores the total amount of the 'Arbeidsgehandicapten' within the declaration period.

Note! This field is applicable for Collectieve aangifte.

CountryFloat33 - Vakantiebijslag

The [HrPayrollDeclarations.CountryFloat33] field stores the payment of the holiday allowance can be found in the payroll transactions. The amounts can be retrieved from the payroll transactions from components with the subtypes 1950 and 1960 and where the 'Aangifterubriek' is set to 'V'.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat34 - Opgebouwde recht vakantiebijslag

The [HrPayrollDeclarations.CountryFloat34] field stores the payment of the holiday allowance can be found in the payroll transactions. The amounts can be retrieved from the payroll transactions from components with the subtypes 1901, 1902, 1903, 1904 and 1910 and where the 'Aangifterubriek' is set to 'V'.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat35 - Extra periode salaries

The [HrPayrollDeclarations.CountryFloat35] field stores the payment of the holiday allowance can be found in the payroll transactions. The amounts can be retrieved from the payroll transactions from components with the subtypes 1950 and 1960 and where the 'Aangifterubriek' is set to 'D'.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat36 - Opgebouwde recht vakantiebijslag

The [HrPayrollDeclarations.CountryFloat36] field stores the payment of the holiday allowance can be found in the payroll transactions. The amounts can be retrieved from the payroll transactions from components with the subtypes 1901, 1902, 1903, 1904 and 1910 and where the 'Aangifterubriek' is set to 'D'.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat37 - Loon in geld

The [HrPayrollDeclarations.CountryFloat37] field stores the definition same as column 3 of the loonstaat. The amounts of the following subtypes are taken into account for determination of this field:

1000, 1010, 1015, 1020, 1030, 1500, 1801, 1811, 1850, 1860, 1950, 1960.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat38 - Waarde niet in geld uitgekeerd loon

The [HrPayrollDeclarations.CountryFloat38] field stores the definition same as column 4 of the loonstaat. The amounts of the following subtypes are taken into account for determination of this field:

1320, 1322, 1323, 1400, 1511.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat39 - Loon uit overwork

The [HrPayrollDeclarations.CountryFloat39] field stores the total amount is determined based on the field 'Aangifterubriek' in the components. If this field is set to 'O' then the calculated amount in the payroll transaction is taken into account.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat4 - Premieloon WAO Aof / Premieloon basispremie WAO/IVA/WGA

The [HrPayrollDeclarations.CountryFloat4] field stores the following values:

Premieloon WAO Aof: The [HrPayrollDeclarations.CountryFloat4] field stores the total base value of the 'Premie WAO Aof' within the declaration period. See also the [HrPayrollDeclarations.CountryFloat5] field.

Note! This field is applicable until 2006 for Collectieve aangifte.

Premieloon basispremie WAO/IVA/WGA: The [HrPayrollDeclarations.CountryFloat4] field stores the total base value of the 'Premie WAO/IVA/WGA basis' within the declaration period. See also the [HrPayrollDeclarations.CountryFloat5] field.

Note! This field is applicable as from 2007 for Collectieve aangifte.

CountryFloat40 - Aantal SV-dagen

The [HrPayrollDeclarations.CountryFloat40] field stores the number of days, which are taken from the subtype 1000 and 1010.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat41 - Aantal verloonde uren

The [HrPayrollDeclarations.CountryFloat41] field stores the hours entered on the components where the field 'Aangifterubriek' is set to 'Reguliere uren' or 'Overwerk'.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat42 - Bedrag genoten zeedagenaftrek

The [HrPayrollDeclarations.CountryFloat42] field stores the amount retrieved from the payroll details of the resource. This field stores one of the following value based on the conditions as described in the table below:

Value	Conditions
Bedrag speciale aanduiding 1 (This value is retrieved from the [HrPayroll.CountryFloat8] field)	MAX(HrPayroll.CountrySmallInt11) = 17
Bedrag speciale aanduiding 2 (This value is retrieved from the [HrPayroll.CountryFloat9] field)	MAX(HrPayroll.CountrySmallInt12) = 17
Bedrag speciale aanduiding 3 (This value is retrieved from the [HrPayroll.CountryFloat10] field)	MAX(HrPayroll.CountrySmallInt13) = 17

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat43 - Bedrag in wwv-uitkering begrepen alimentatie

The [HrPayrollDeclarations.CountryFloat43] field stores the amount retrieved from the payroll details of the resource. This field stores one of the following value based on the conditions as described in the table below:

Value	Conditions
Bedrag speciale aanduiding 1 (This value is retrieved from the [HrPayroll.CountryFloat8] field)	MAX(HrPayroll.CountrySmallInt11) = 25
Bedrag speciale aanduiding 2 (This value is retrieved from the [HrPayroll.CountryFloat9] field)	MAX(HrPayroll.CountrySmallInt12) = 25
Bedrag speciale aanduiding 3 (This value is retrieved from the [HrPayroll.CountryFloat10] field)	MAX(HrPayroll.CountrySmallInt13) = 25

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat44 - Bedrag rechtstreeks betaalde alimentatie

The [HrPayrollDeclarations.CountryFloat44] field stores the amount retrieved from the payroll details of the resource. This field stores one of the following value based on the conditions as described in the table below:

Value	Conditions
Bedrag speciale aanduiding 1 (This value is retrieved from the [HrPayroll.CountryFloat8] field)	MAX(HrPayroll.CountrySmallInt11) = 26
Bedrag speciale aanduiding 2 (This value is retrieved from the [HrPayroll.CountryFloat9] field)	MAX(HrPayroll.CountrySmallInt12) = 26
Bedrag speciale aanduiding 3 (This value is retrieved from the [HrPayroll.CountryFloat10] field)	MAX(HrPayroll.CountrySmallInt13) = 26

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat45 - Waarde privé-gebruik auto

The [HrPayrollDeclarations.CountryFloat45] field stores the amount determined based on the subtype 1401.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat46 - Werknemersbijdrage privé-gebruik auto

The [HrPayrollDeclarations.CountryFloat46] field stores the amount determined based on the subtype 1402.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat47 - Bedrag werkgeversbijdrage kinderopvang

The [HrPayrollDeclarations.CountryFloat47] field stores the amount determined based on the components where the field 'Aangifterubriek' is set to 'Vergoeding kinderopvang'.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat48 - Gespaard bedrag levensloopregeling

The [HrPayrollDeclarations.CountryFloat48] field stores the amount determined based on the subtype 1510 and 1511.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat49 - Bedrag vergoeding reiskosten

The [HrPayrollDeclarations.CountryFloat49] field stores the amount determined based on the subtype 1110 or subtype 1100, 1800, 1810. In the situation of the last three subtypes, the field 'Soort regeling' must be set to 'RKV_04'.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

CountryFloat5 - Premie WAO Aof / Basispremie WAO/IVA/WGA / Totaalpremie WAO Aof / Total basispremie WAO/IVA/WGA

The [HrPayrollDeclarations.CountryFloat5] field stores the following values:

Premie WAO Aof / Basispremie WAO/IVA/WGA: The [HrPayrollDeclarations.CountryFloat5] field stores the amount determined based on the subtype 2521 (WAO basis).

Note! The field caption 'Premie WAO Aof' is applicable for Nominatieve aangifte.

The field caption 'Basispremie WAO/IVA/WGA' is applicable as from 2007 for Werknemergegevens.

Totaalpremie WAO Aof: The [HrPayrollDeclarations.CountryFloat5] field stores the total amount of the 'WAO-basis' within the declaration period.

Note! This field is applicable until 2006 for Collectieve aangifte.

Totaal basispremie WAO/IVA/WGA: The [HrPayrollDeclarations.CountryFloat5] field stores the total amount of the 'WAO/IVA/WGA basis' within the declaration period.

Note! This field is applicable as from 2007 for Collectieve aangifte.

CountryFloat50 - Toegepast bedrag levensloopverlofkorting

The [HrPayrollDeclarations.CountryFloat50] field stores the amount determined based on the subtype 3030.

Note! This field is applicable as from 2007 for Werknemergegevens.

CountryFloat6 - Premie WAO Aok / Premie WAO gedifferentieerde premies WAO/WGA

The [HrPayrollDeclarations.CountryFloat6] field stores the following values:

Premie WAO Aok: The [HrPayrollDeclarations.CountryFloat6] field stores the total base value of the 'Premie WAO Aok' within the declaration period. See also the [HrPayrollDeclarations.CountryFloat7] field.

Note! This field is applicable until 2006 for Collectieve aangifte.

Premie WAO gedifferentieerde premies WAO/WGA: The [HrPayrollDeclarations.CountryFloat6] field stores the total base value of the 'Premie WAO/WGA gedifferentieerde' within the declaration period. See also the [HrPayrollDeclarations.CountryFloat7] field.

Note! This field is applicable as from 2007 for Collectieve aangifte.

CountryFloat7 - Premie WAO Aok / Gedifferentieerde premie WAO/WGA / Totaalpremie WAO Aok / Totaal gedifferentieerde premie WAO/WGA

The [HrPayrollDeclarations.CountryFloat7] field stores the following values:

Premie WAO Aok: The [HrPayrollDeclarations.CountryFloat7] field stores the amount determined based on the subtype 2522 (WAO gedifferentieerd).

Note! This field is applicable for Nominatieve aangifte.

Gedifferentieerde premie WAO/WGA: The [HrPayrollDeclarations.CountryFloat7] field stores the amount determined based on the subtype 2522 (WAO gedifferentieerd) and 2534 (WGA gedifferentieerd).

Note! This field is applicable as from 2007 for Werknemergegevens.

Totaalpremie WAO Aok:The [HrPayrollDeclarations.CountryFloat7] field stores the total amount of the 'WAO-gedifferentieerd' within the declaration period.

Note! This field is applicable until 2006 for Collectieve aangifte.

Totaal gedifferentieerde premie WAO/WGA:The [HrPayrollDeclarations.CountryFloat7] field stores the total amount of the 'WAO-gedifferentieerd' within the declaration period.

Note! This field is applicable as from 2007 for Collectieve aangifte.

CountryFloat8 - Premieloon AWF (WW)

The [HrPayrollDeclarations.CountryFloat8] field stores the total base value of the 'Premie WW' within the declaration period. See also the [HrPayrollDeclarations.CountryFloat9] field.

Note! This field is applicable for Collectieve aangifte.

CountryFloat9 - Premie WW Awf werkgevers- en werknemersdeel / Totaalpremie WW AWF

The [HrPayrollDeclarations.CountryFloat9] field stores the following values:

Premie WW Awf werkgevers- en werknemersdeel: The [HrPayrollDeclarations.CountryFloat9] field stores the amount determined based on the subtypes 2500 and 2501.

Note! This field is applicable for Nominatieve aangifte and as from 2007 for Werknemergegevens.

Totaalpremie WW AWF: The [HrPayrollDeclarations.CountryFloat9] field stores the total amount of the 'WW werknemer' + 'WW werkgever' within the declaration period.

Note! This field is applicable for Collectieve aangifte.

CountryInt1 - Volgnummer bericht

The [HrPayrollDeclarations.CountryInt1] field stores the unique serial number in the declaration.

Note! This field is applicable for Bericht.

CountryInt2 - Nummer inkomstenverhouding

The [HrPayrollDeclarations.CountryInt2] field stores the entered nummer inkomstenverhouding in maintenance resource. The value is retrieved from the [HrPayroll.CountrySmallInt18] (NLHrPayroll.Iv_nummer)) field.

Note! This field is applicable as from 2007 for Inkomstenverhouding.

CountryNoYes1 - Indicatie regelmatig arbeidspatroon

The [HrPayrollDeclarations.CountryNoYes1] field stores the code retrieved from the 'Regelmatig arbeidspatroon' field. The value is retrieved from the [HrPayroll.CountryNoYes7] field. This field stores one of the following values:

Value	Description
0	N
1	J

Note! This field is applicable until 2006 for Inkomstenperiode.

CountryNoYes10 - Indicatie vervoer vanwege inhoudingsplichtige

The [HrPayrollDeclarations.CountryNoYes10] field stores the indication retrieved from the 'Code speciale aanduiding 1', 'Code speciale aanduiding 2' and 'Code speciale aanduiding 3' fields. This field stores one of the following value based on the conditions as described in the table below:

Value	Description
J	[HrPayroll.CountrySmallInt11] = 03 OR [HrPayroll.CountrySmallInt12] = 03 OR [HrPayroll.CountrySmallInt13] = 03
N	Other than the above conditions

Note! This field is applicable for Inkomstenperiode.

CountryNoYes11 - Indicatie aanvulling op uitkering

The [HrPayrollDeclarations.CountryNoYes11] field stores the indication retrieved from the 'Bedrag uitkering' field. This field stores one of the following value based on the conditions as described in the table below:

Value	Description
J	[HrPayroll.CountryInt1] > 0
N	Other than the above condition

Note! This field is applicable until 2006 for Inkomstenperiode.

CountryNoYes2 - Indicatie loonheffingskorting

The [HrPayrollDeclarations.CountryNoYes2] field stores the indication retrieved from the 'Regelmatig arbeidspatroon' field. The value is retrieved from the [HrPayroll.CountryTest3] field. This field stores one of the following values:

Value	Description
0	N (unchecked)
1	J (checked)

Note! This field is applicable for Inkomstenperiode.

CountryNoYes3 - Indicatie verzekerd WAO / Indicatie verzekerd WAO/IVA/WGA

The [HrPayrollDeclarations.CountryNoYes3] field stores the indication retrieved from the 'WAO' field. The value is retrieved from the [HrPayroll.CountryTest13] field. This field stores one of the following values:

Value	Description
J	Ja
N	Nee

Note! The field caption 'Indicatie verzekerd WAO' is applicable until 2006 for Inkomstenperiode.

The field caption 'Indicatie verzekerd WAO/IVA/WGA' is applicable as from 2007 for Inkomstenperiode.

CountryNoYes4 - Indicatie verzekerd WW

The [HrPayrollDeclarations.CountryNoYes4] field stores the indication retrieved from the 'WW' field. The value is retrieved from the [HrPayroll.CountryTest11] field. This field stores one of the following value based on the conditions as described in the table below:

Value	Description	Conditions
J	Ja / Ja, geen franchise	[HrPayroll.CountryTest11] = [J, G]
N	Nee	[HrPayroll.CountryTest11] = N

Note! This field is applicable for Inkomstenperiode.

CountryNoYes5 - Indicatie verzekerd ZW

The [HrPayrollDeclarations.CountryNoYes5] field stores the indication retrieved from the 'ZW' field. The value is retrieved from the [HrPayroll.CountryTest12] field. This field stores one of the following values:

Value	Description
J	Ja
N	Nee

Note! This field is applicable for Inkomstenperiode.

CountryNoYes6 - Indicatie vakantiebon toegepast

The [HrPayrollDeclarations.CountryNoYes6] field stores the indication retrieved from the 'Vakantiebonnen' field. The value is retrieved from the [HrPayroll.CountryTest10] field. This field stores one of the following value based on the conditions as described in the table below:

Value	Description	Conditions
J	10 t/m 19 dagen / Vanaf 20 dagen	[HrPayroll.CountryTest10] = [2, 3]
N	Geen franchise / Minder dan 10 dagen	[HrPayroll.CountryTest10] = [0, 1]

Note! This field is applicable for Inkomstenperiode.

CountryNoYes7 - Indicatie loon bestaat mede uit een AOW uitkering voor alleenstaande

The [HrPayrollDeclarations.CountryNoYes7] field stores the indication retrieved from the 'Code speciale aanduiding 1', 'Code speciale aanduiding 2' and 'Code speciale aanduiding 3' fields. This field stores one of the following value based on the conditions as described in the table below:

Value	Conditions
J	[HrPayroll.CountrySmallInt11] = 71 OR [HrPayroll.CountrySmallInt12] = 71 OR [HrPayroll.CountrySmallInt13] = 71
N	Other than the above conditions

Note! This field is applicable for Inkomstenperiode.

CountryNoYes8 - Indicatie loon bestaat mede uit een WAJONG uitkering

The [HrPayrollDeclarations.CountryNoYes8] field stores the indication retrieved from the 'Code speciale aanduiding 1', 'Code speciale aanduiding 2' and 'Code speciale aanduiding 3' fields. This field stores one of the following value based on the conditions as described in the table below:

Value	Conditions
J	[HrPayroll.CountrySmallInt11] = 72 OR [HrPayroll.CountrySmallInt12] = 72 OR [HrPayroll.CountrySmallInt13] = 72
N	Other than the above conditions

Note! This field is applicable for Inkomstenperiode.

CountryNoYes9 - Indicatie personeelslening

The [HrPayrollDeclarations.CountryNoYes9] field stores the indication retrieved from the 'Code speciale aanduiding 1', 'Code speciale aanduiding 2' and 'Code speciale aanduiding 3' fields. This field stores one of the following value based on the conditions as described in the table below:

Value	Conditions
J	[HrPayroll.CountrySmallInt11] = 43 OR [HrPayroll.CountrySmallInt12] = 43 OR [HrPayroll.CountrySmallInt13] = 43
N	Other than the above conditions

Note! This field is applicable for Inkomstenperiode.

CountryTest1 - Type

The [HrPayrollDeclarations.CountryTest1] field stores the general type of declaration that is created. The possible values are as the following:

Value	Conditions
A	Additional declaration (Aanvullende aangifte)
C	Correction declaration (Correctie aangifte)
V	Regular declaration (Volledige aangifte)

CountryTest2 - Subtype

The [HrPayrollDeclarations.CountryTest2] field stores the type of declaration that is created for the resource. The possible values are as the following:

Value	Conditions
0	Initial declaration (Inkomstenverhouding initieel)
1	Correction declaration (Inkomstenverhouding correctie)
2	Deletion declaration (Inkomstenverhouding intrekking)

CountryTest3 - Code reddende einde inkomstenverhouding flexwerker

The [HrPayrollDeclarations.CountryTest3] field stores the code retrieved from the 'Einde dienstverband' field in the payroll details of the resource. This field stores one of the following values based on the conditions as described in the table below:

Value	Description	Conditions
0	Niet van toepassing	HrPayroll.CountryTest16 = 0
1	Einde werk/einde contract, geen werk aangeboden	HrPayroll.CountryTest16 = 5
2	Einde werk/einde contract, werk aangeboden	HrPayroll.CountryTest16 = 6
3	Geen einde werk/einde contract; lopend arbeidscontract	HrPayroll.CountryTest16 = 7
4	Inlener heeft opdracht ingetrokken	HrPayroll.CountryTest16 = 8
5	Uitzendkracht heeft ontslag genomen	HrPayroll.CountryTest16 = 9

Note! This field is applicable for Inkomstenverhouding.

CountryTest4 - Code contract onbepaalde / bepaalde tijd

The [HrPayrollDeclarations.CountryTest4] field stores the code retrieved from the 'Code contract' field. The value is retrieved from the [HrPayroll.Country8Char1] field. This field stores one of the following values:

Value	Description
B	Bepaalde tijd
C	Volgens contract
O	Onbepaalde tijd

Note! This field is applicable for Inkomstenperiode.

CountryTest5 - Code arbeidsgehandicaptenkorting

The [HrPayrollDeclarations.CountryTest5] field stores the code retrieved from the 'Arbeitsgehandicaptenkorting' field. The value is retrieved from the [HrPayroll.Country8Char6] field. This field stores one of the following values:

Value	Description
0	Geen gehandicaptenkorting
1	Arbeitsgehandicaptenkorting voor in dienst genomen jonggehandicapte
2	Arbeitsgehandicaptenkorting voor herplaatste jnggehandicapte
3	Arbeitsgehandicaptenkorting voor in dienst genomen arbeidsgehandicapte
4	Arbeitsgehandicaptenkorting voor herplaatste arbeidsgehandicapte

Note! This field is applicable for Inkomstenperiode.

CountryTest6 - Code redden geen bijtelling auto

The [HrPayrollDeclarations.CountryTest6] field stores the code retrieved from the 'Code redden geen bijtelling auto' field. The value is retrieved from the [HrPayroll.CountryTest31] field. This field stores one of the following values:

Value	Description
1	Afspraak via werkgever met belastingdienst
2	Werknemer heft beschikking belastingdienst (only available for 2006)
	Verklaring geen privé gebruik auto (available as from 2007)
3	Ander bewijs
	Ander bewijs personen- en bestelauto (available as from 2007)
4	Bwstelauto zonder prive gebruik (only available for 2006)
5	Doorlopen afwisselend gebruik bestelauto (available as from 2007)

Note! This field is applicable for Inkomstenperiode.

CountryTest7 - Code verzekeringssituatie Zvw

The [HrPayrollDeclarations.CountryTest7] field stores the code retrieved from the 'Code Zvw' field in the payroll details. The value is retrieved from the [HrPayroll.CountryTest32] field. This field stores one of the following values:

Value	Description
A	Niet verzekeringsplichtig
B	Niet verzekeringsplichtig (militair)
C	Verzekeringsplichtig (normaal tarief)
D	Verzekeringsplichtig (zeelieden)
E	Verzekeringsplichtig (verlaagd tarief)
F	Verzekeringsplichtig (meerdere tarieven)
G	Niet verzekeringsplichtig (Buitenlands artiest/sporter) (available as from 2007)
H	Verzekeringsplichtig (Binnenlands artiest) (available as from 2007)
I	Niet verzekeringsplichtig (Bijdrage CVZ) (available as from 2007)

Note! This field is applicable for Inkomstenperiode.

CountryTest8 - Code incidentele inkomstenvermindering

The [HrPayrollDeclarations.CountryTest8] field stores the code retrieved from the 'Code inkomstenvermindering' field. The value is retrieved from the [HrPayroll.CountryTest26] field. This field stores one of the following values:

Value	Description
B	Bevalling of zwangerschap
O	Onbetaald verlof
Z	Ziekte

Note! This field is applicable for Inkomstenperiode.

CountryVarChar1 - Contactpersoon aanleveraar

The [HrPayrollDeclarations.CountryVarChar1] field stores the full name of the contact person.

Note! This field is applicable for Bericht.

CountryVarChar10 - Sector

The [HrPayrollDeclarations.CountryVarChar10] field stores the code retrieved from the 'Sector' field in the payroll details of the resource. The value is retrieved from the [HrPayroll.Country8Char2] field.

Note! This field is applicable for Specificatie wachtgeldfondspremie (Wgf) and Sector risicogroep.

CountryVarChar11 - Risicopremiegroep

The [HrPayrollDeclarations.CountryVarChar11] field stores the code retrieved from the 'Premium group' field in the payroll details of the resource. The value is retrieved from the [HrPayroll.CountryTest19] field.

Note! This field is applicable for Specificatie wachtgeldfondspremie (Wgf) and Sector risicogroep.

CountryVarChar12 - Naam inhoudingsplichtige

The [HrPayrollDeclarations.CountryVarChar12] field stores the name of the creditor (employer) that is linked to the reference number (Loonheffingnummer).

Note! This field is applicable for Administrative eenheid.

CountryVarChar2 - Telefoonnummer aanleveraar

The [HrPayrollDeclarations.CountryVarChar2] field stores the phone number of the contact person.

Note! This field is applicable for Bericht.

CountryVarChar3 - Aanduiding inkomstenverhouding werkgever

The [HrPayrollDeclarations.CountryVarChar3] field stores the ID of the resource and the eventual extra indication that is entered in the payroll details (Aanduiding inkomstenverhouding). The value is retrieved from the [Humres.Res_id] field and the [HrPayroll.CountrySmallInt17] field.

Note! This field is applicable for Inkomstenverhouding.

CountryVarChar4 - Code soort inkomen

The [HrPayrollDeclarations.CountryVarChar4] field stores the code retrieved from the 'Inkomenscode' field in the payroll details of the resource. The value is retrieved from the [HrPayroll.CountrySmallInt1] field.

Note! This field is applicable for Inkomstenperiode.

CountryVarChar5 - Code aard arbeidsverhouding

The [HrPayrollDeclarations.CountryVarChar5] field stores the code retrieved from the 'Inkomenscode' field in the payroll details of the resource. This field stores one of the following value based on the conditions as described in the table below:

Value	Description
1	MAX(HrPayroll.CountryNoYes6) = 1 OR Other than any of these conditions
2	MAX(HrPayroll.Country8Char5) = 01
3	MAX(HrPayroll.Country8Char5) = 13
4	MAX(HrPayroll.Country8Char5) = 10
5	MAX(HrPayroll.Country8Char5) = 05
6	MAX(HrPayroll.Country8Char5) = 08
7	MAX(HrPayroll.Country8Char5) = 04
8	MAX(HrPayroll.Country8Char5) = 06
9	MAX(HrPayroll.Country8Char5) = 02

Value	Description
10	MAX(HrPayroll.Country8Char5) = 03
11	MAX(HrPayroll.Country8Char5) = 07
12	MAX(HrPayroll.Country8Char5) = 09
13	MAX(HrPayroll.Country8Char5) = 26
14	MAX(HrPayroll.Country8Char5) = 11
17	MAX(HrPayroll.Country8Char5) = 22
18	MAX(HrPayroll.Country8Char5) = 23
19	MAX(HrPayroll.Country8Char5) = 24
78	MAX(HrPayroll.Country8Char5) = 25

Note! This field is applicable for Inkomstenperiode.

CountryVarChar6 - Code invloed verzekeringplicht

The [HrPayrollDeclarations.CountryVarChar6] field stores the code retrieved from the 'Uitzonderingssituatie' field in the payroll details of the resource. This field stores one of the following value based on the conditions as described in the table below:

Value	Description	Conditions
A	Familie van de eigenaar	MAX(HrPayroll.CountryTest17) = 'F'
B	Vorige eigenaar	MAX(HrPayroll.CountryTest17) = 'V'
C	Directeur/grotaandeelhouder	MAX(HrPayroll.CountryTest17) = 'D'
D	Oproep/invalkracht zonder verplichting	MAX(HrPayroll.CountryTest17) = 'O'
E	Oproep/invalkracht met verplichting	MAX(HrPayroll.CountryTest17) = 'P'
MAX(HrPayroll.CountryTest17)		Other than the above conditions

Note! This field is applicable for Inkomstenperiode.

CountryVarChar7 - Code fase indeling F&Z

The [HrPayrollDeclarations.CountryVarChar7] field stores the code retrieved from the 'Code fase indeling F&Z' field. The value is retrieved from the [HrPayroll.Country8Char4] field. This field stores one of the following values:

Value	Description
0	Onbekend of n.v.t
1	Fase 1 (met uitzendbeding)
2	Fase 2 (met uitzendbeding)
3	Fase 3
4	Fase 4
5	Wettelijk regime
6	Ketensysteem
17	Fase A met uitzendbeding
18	Fase B
19	Fase C
38	Fase A zonder uitzendbeding, met loonuitsluiting
40	Fase A zonder uitzendbeding
41	Fase 1 zonder uitzendbeding
42	Fase 2 zonder uitzendbeding
C	Volgens contract

Note! This field is applicable for Inkomstenperiode.

CountryVarChar8 - Code CAO

The [HrPayrollDeclarations.CountryVarChar8] field stores the code retrieved from the 'CAO' field. This field stores one of the following value based on the conditions as described in the table below:

Value	Description
9999	HrPayroll.CountryFloat21 = 0
HrPayroll.CountryFloat21	Other than the above condition

Note! This field is applicable for Inkomstenperiode.

CountryVarChar9 - Code loonbelastingtabel

The [HrPayrollDeclarations.CountryVarChar9] field stores the code for which the deduction of LB/PVV has been applied. The code is composed of three separate fields/figures.

- Soort tabel (eerste cijfer)

Value	Description
0	Tabel zonder herleidingsregels, werknemer zowel belasting - als premieplichtig
3	Werknemer alleen premieplichtig
5	Werknemer alleen belastingplichtig
6	Werknemer belastingplichtig en niet premieplichtig voor de AWBZ
7	Werknemer belastingplichtig en alleen premieplichtig voor de AWBZ

- Kleur tabel (tweede cijfer)

Value	Description
1	Wit
2	Groen

- Loontijdvak (derde cijfer)

Value	Description
0	Uitsluitend tabel voor bijzondere beloningen toegepast
1	Kwartaal
2	Maand
3	Week
4	4-weken
5	Dag

To particular situations, the following codes apply:

Value	Description
210	Aannemers van werk, thuiswerkers en gelijkgestelden
220	Binnenlandse artiesten of beroepssporters
221	Buitenlandse artiesten of beroepssporters (verlaagd tarief)
224	Buitenlandse artiesten gezelschappen en sportploegen
225	Buitenlandse beroepssporters met een verlaagd tarief op grond van een ministerieel besluit
226	Werknemer niet blastingplichtig en alleen premieplichtig voor de AWBZ
227	Werknemer niet belastingplichtig en alleen premieplichtig voor de ANW
228	Werknemer niet belastingplichtig en alleen premieplichtig voor de AOW/ANW
250	Uitkeringen bijstandspercentagetarief
940	52%-tarief in verband met anonieme werknemers
999	Overage gevallen waarin geen tabel is toegepast

Note! This field is applicable for Inkomstenperiode.

DeclarationDate - Datum/tijdstip aanmaak

The [HrPayrollDeclarations.DeclarationDate] field stores the created date of the declaration. This field will be filled with the system date if the declaration is processed.

Note! This field is applicable for Bericht.

Reference - Bericht kenmerk aanleveraar

The [HrPayrollDeclarations.Reference] field stores the external reference of the declaration for which the combination is Loonheffingnummer + payroll year + declaration period + declaration sequence.

Note! This field is applicable for Bericht.

ReferenceNumber - Loonheffingnummer

The [HrPayrollDeclarations.ReferenceNumber] field stores the reference number linked to the cost center of the various resources. The declaration belongs to only one Loonheffingnummer. The value is retrieved from the [Absence.Reference_number] field where the [Absences.FreeTextField_01] field = 'FISCAL' and the [Absences.FreeTextField_02] field = the [Humres.CostCenter] field.

Note! This field is applicable for Administratieve eenheid.

Res_id - Res_id

The [HrPayrollDeclarations.Res_id] field stores the ID of the resource for which a declaration line must be created.

Type - Type

The [HrPayrollDeclarations.Type] field stores the type, either 'LA' or 'OLP'.



Chapter 52 | Field properties

52. Field properties

52.1 Humres

This section will give a technical overview of the database fields and the way they are used. If the field described has a reference to another table or field, the referenced field is also mentioned.

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
absent	Out of office		int		No	216	0
addr_no	Address number		char	10	Yes	3718	
addr_xtra	Extra address data		char	10	Yes	13762	
AdjustedHireDate	Adjust Hire Date		datetime		Yes		
adres1	Address 1		char	60	Yes	9163	
adres2	Address 2		char	60	Yes	9180	
adv_code	Employment type code		char	1	Yes	13336	
affix	Affix		varchar	64	Yes	0	
ApplicationStage	Application stage		Char	1	Yes		
Assistant	Assistant	Humres.Res_ID	int		No	54	0
BackofficeBlocked	Blocked for back office		tinyint	1	No	15	0
bankac_0	Bank account 1	Bnkacc.Banknr, Bnkkop.Bank_rek	char	34	Yes		
bankac_1	Bank account 2	Bnkacc.Banknr, Bnkkop.Bank_rek	char	34	Yes		
BankingLimit	Payment limit		float		No	673	0.0
birth_affix	Birth affix		varchar	64	Yes	0	
birth_prefix	Birth prefix		varchar	64	Yes	0	
blocked	Blocked		tinyint		No	1267	0
btw_nummer	VAT number		char	20	Yes	1138	
buyer	Buyer		tinyint		No	3691	0
ChildBirthDate1	Date of birth child 1		datetime		Yes		
ChildBirthDate2	Date of birth child 2		datetime		Yes		
ChildBirthDate3	Date of birth child 3		datetime		Yes		
ChildBirthDate4	Date of birth child 4		datetime		Yes		
ChildBirthDate5	Date of birth child 5		datetime		Yes		
ChildName1	Name child 1		varchar	64	Yes		
ChildName2	Name child 2		varchar	64	Yes		
ChildName3	Name child 3		varchar	64	Yes		

Humres

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
ChildName4	Name child 4		varchar	64	Yes		
ChildName5	Name child 5		varchar	64	Yes		
Classification	Classification		char	3	Yes	440	
cmp_wwn	Account	Cicmpy.Cmp_wwn	uniqueidentifier		Yes		
comp	Division	Bedryf.Bednr	char	3	Yes	64	
cont_end_date	Contract end date		datetime		Yes	30514	
costcenter	Cost center	Kstpl.KstplCode	char	8	Yes	8494	
crcard_expd	Expiry date		datetime		Yes	18268	
crcard_no	Credit card number		char	30	Yes	29644	
crcard_type	Credit card type	DDTests	char	1	Yes	29643	
crdnr	Creditor number	Cicmpy.Crdnr	char	30	Yes	1588	
Division	Division		smallint	2	Yes	64	
email	Home e-mail		char	255	Yes	24725	
emp_stat	Status	ResourceStatus.Status, DDTests	char	1	Yes	4332	
emp_statd	Employee status date	ResourceTypes.Type, DDTests	datetime		Yes	30155	
emp_type	Type		char	1	Yes	3801	
extra_code	Extra code		char	12	Yes	2961	
extra_text	Extra text		char	20	Yes	2960	
exttar	External rate		float		No	9503	0.0
faxnr	Fax		char	25	Yes	5793	
first_name	First name		char	64	Yes	1673	
freefield1	Human resources: free field 1		char	50	Yes	28138	
freefield10	Human resources: free field 10		datetime		Yes	27178	
freefield11	Human resources: free field 11		float		No	27177	0.0
freefield12	Human resources: free field 12		float		No	27130	0.0
freefield13	Human resources: free field 13		float		No	27129	0.0
freefield14	Human resources: free field 14		float		No	27128	0.0
freefield15	Human resources: free field 15		float		No	27120	0.0
freefield16	Human resources: free field 16		tinyint		No	27022	0
freefield17	Human resources: free field 17		tinyint		No	27021	0
freefield18	Human resources: free field 18		tinyint		No	26588	0
freefield19	Human resources: free field 19		tinyint		No	26591	0

Humres

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
freefield2	Human resources: free field 2		char	50	Yes	28154	
freefield20	Human resources: free field 20		tinyint		No	26604	0
freefield3	Human resources: free field 3		char	50	Yes	28157	
freefield4	Human resources: free field 4		char	50	Yes	28192	
freefield5	Human resources: free field 5		char	50	Yes	28227	
freefield6	Human resources: free field 6		datetime		Yes	28280	
freefield7	Human resources: free field 7		datetime		Yes	28409	
freefield8	Human resources: free field 8		datetime		Yes	28531	
freefield9	Human resources: free field 9		datetime		Yes	28539	
fte	FTE		float		No	30024	0.0
fullname	Full name		char	64	Yes	23700	
funcnivo	Previous rating		char	4	Yes	15559	
geb_ldat	Date of birth		datetime		Yes	3026	
geb_pl	Place of birth		char	30	Yes	23695	
ID	ID		int		No		
identiteit	Identity data		char	20	Yes	13205	
initialen	Initials		char	10	Yes	1337	
internetac	Internet		char	60	Yes	25174	
inttar	Internal rate		float		No	2971	0.0
InvoiceLimit	Invoice limit		float		No	13377	0.0
iso_taalcd	Language	Taal.Taalcode	char	3	Yes	1675	
IsPersonalAccount	Personal account		tinyint		Yes	32010	0
ItemCode	Item code	Items.ItemCode	varchar	30	Yes	1102	
job_level	Security level		int		No	209	0
job_title	Job title	Hrjbtl.Job_title	char	12	Yes	29537	
JobCategory	Job Category		char	10	Yes	18201	
kamer	Room		char	10	Yes	14561	
kstdr_code	Cost unit	kstdr.kstdrcode	char	8	Yes	1194	
land_iso	Country	Land.LandCode	char	3	Yes	2356	
land_iso2	Country of origin	Land.LandCode	char	3	Yes	1970	
ldatindienst	Employment date		datetime		Yes	3028	
ldatuitdienst	Departure date		datetime		Yes	3029	

Humres

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
loc	Location	HrLoc.Loc	char	10	Yes	18818	
maiden_name	Maiden name		char	30	Yes	11310	
mail	E-mail		char	100	Yes	5804	
MainLoc	Main location	HrLoc.Loc	char	10	Yes	6995	
mar_date	Date married		datetime		Yes	31250	
mar_stat	Marital status	DDTests	char	1	Yes	13288	
middle_name	Middle name		char	30	Yes	30003	
mobile_short	mobil_short		char	15	Yes	0	
MsnID	MSN ID		varchar	60	Yes		
mv1	Gender	DDTests	char	1	Yes	30718	
nat	Nationality	HrLoc.Loc	char	3	Yes	29282	
notes	Notes	Notes.ID	int		Yes		
OldNTFullName	Old NT full name		char	64	Yes		
Partner	Partner		varchar	64	Yes		
PartnerBirthDate	Date of birth		datetime		Yes		
payempl	Payroll employee		tinyint		No	30867	0
Picture	Picture		image		Yes		
picturefilename	Picture file name		char	128	Yes		
PortalCreator	Portal Creator		int		No		0
postcode	Postal code		char	20	Yes	1664	
prafd_code	Department	prafd.prafd_code	char	8	Yes	5652	
predcode	Title	Pred.Predcode	char	4	Yes	1672	
predcode2	Qualifications		varchar	64	Yes	10435	
prefix	Prefix		varchar	64	Yes	64847	
prob_endd	Probation end date		datetime		Yes	29516	
prob_per	Probation period		char	2	Yes	29491	
prob_pert	Probation period type		char	1	Yes	29517	
ProcessedByBackgroundJob	Processed by background job		tinyint	1	No		0
projempl	Productive		tinyint		No	16924	0
pur_limit	Purchase limit		float		No	29518	0.0
race	Race		char	2	Yes	0	
rating	Rating		char	3	Yes	263	

Humres

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
reason_resign	Reason end of employment		char	120	Yes	10463	
representative	Representative		tinyint		No	1348	0
repto_id	Manager	Humres.Res_ID	int		No	29906	0
res_id	Resource	Humres.Res_ID	int		No	12	0
RMALimit	RMA order limit		float		No	13376	0.0
SalesLimit	Sales/Service limit		float		No	13375	0.0
Scale	Job level		int		No	23643	0
Signature	Signature		image		Yes		
SignatureFile	Signature file name		varchar	128	Yes		
SkypeID	Skype ID		varchar	60	Yes		
slip_tekst	Salary slip text		char	210	Yes	30864	
socsec_nr	Social Security no.		char	50	Yes	30007	
StateCode	State	AddressStates.StateCode	char	3	Yes	59	
sur_name	Last name		char	64	Yes	207	
SynchronizeExchange	Synchronize MS Exchange calendar		bit		No		0
syscreated	Created date and time		datetime		No	0	
syscreator	Creator	Humres.Res_ID	int		No	0	0
sysguid	sysguid		uniqueidentifier		No	0	
sysmodified	Modified date and time		datetime		No	0	
sysmodifier	Modifier	Humres.Res_ID	int		No	0	0
task	Focus		char	90	Yes	30006	
telnr_prv	Home telephone number		char	15	Yes	22573	
telnr_prv2	Private mobile		char	15	Yes	25459	
telnr_werk	Company telephone number		char	25	Yes	7282	
telnr_werk2	Mobile		char	25	Yes	24549	
timestamp	timestamp		timestamp		No		
TimeZone	Time zone	TimeZones.ID	int		Yes	646	
toestel	Extension		char	4	Yes	3025	
uitk_code	Social benefit authority		char	3	Yes	16686	
UserGroup	User group		char	30	Yes	3770	Baco
usr_id	User name		char	20	Yes	8928	
usr_id2	Secure user ID		char	20	Yes		

Humres

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
valcode	Purchase limit currency	valuta.valcode	char	3	Yes	30500	
VacancyStartDate	Vacancy Start Date		Datetime		Yes		
VacancyType	Vacancy type		char	1	No		l
woonpl	City		char	30	Yes	1889	
workstat	Workstation		char	20	Yes		
workstat_addr	Workstation address		char	20	Yes	30510	

52.2 HrFree

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Competency1	Competency 1		bit		No		0
Competency10	Competency 10		bit		No		0
Competency11	Competency 11		bit		No		0
Competency12	Competency 12		bit		No		0
Competency13	Competency 13		bit		No		0
Competency2	Competency 2		bit		No		0
Competency3	Competency 3		bit		No		0
Competency4	Competency 4		bit		No		0
Competency5	Competency 5		bit		No		0
Competency6	Competency 6		bit		No		0
Competency7	Competency 7		bit		No		0
Competency8	Competency 8		bit		No		0
Competency9	Competency 9		bit		No		0
descr60	Description		char	60	Yes	4243	
Division	Division		smallint	2	Yes	64	
DocID	Document ID	BacoDiscussions.ID	uniqueidentifier		Yes	29273	
filetype	Type		char	4	Yes	5172	
hrgroup	Level 2		char	10	Yes	25968	
ID	ID		int		No		
JobGroup	Job group		char	10	Yes	29538	
notes	Notes	Notes.ID	int		Yes	19582	
reckey	Code		char	10	Yes	4138	

HrFree

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
syscreated	Created date and time		datetime		No	0	
syscreator	Creator	Humres.Res_ID	int		No	0	0
sysguid	sysguid		uniqueidentifier		No	0	
sysmodified	Modified date and time		datetime		No	0	
sysmodifier	Modifier	Humres.Res_ID	int		No	0	0
timestamp	timestamp		timestamp		No		

52.3 HRCompanyPeriods

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CompanyCode	Division	bedryf.bednr	char	3	No	64	
Division	Division		smallint	2	Yes	64	
FinPeriod	Period		int	4	No	5771	
FinYear	Year		int	4	No	1321	
ID	ID		uniqueidentifier	16	No	31212	
Status	Status		int	4	No	4332	(0)
syscreated	Created date and time		datetime	8	No		(getdate())
syscreator	Creator	humres.res_id	int	4	No		(0)
sysmodified	Modified date and time		datetime	8	No		(getdate())
sysmodifier	Modifier	humres.res_id	int	4	No		(0)

52.4 HrjbtI

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
beroep_cd	Profession codes		char	4	Yes	10415	
code_fnc	Position code		char	12	Yes	2987	
del_doc_name	Document		char	128	Yes	7226	
del_doc_path	Document path		char	128	Yes	24785	
descr50	Description		char	50	Yes	4243	
Division	Division		smallint	2	Yes	64	
DocID	Document ID	BacoDiscussions.ID	uniqueidentifier		Yes	29273	
exttar	External rate		float		No	9503	0.0
ID	ID		int		No		
inttar	Internal rate		float		No	2971	0.0
job_grp	Job group	Hrfree.reckey	char	10	Yes	29538	
job_level	Job level		int		No	23643	0
job_title	Job title		char	12	No	29537	
kmrateint	Internal travel rate		float		No	23654	0.0
notes	Notes	Notes.ID	int		Yes	19582	
prodpct	Productive percentage		float		No	23644	0.0
productiv	Productive		tinyint		No	16924	0
RoleID	Role ID		int		Yes	27455	
RoleLevel	Role Level	HRRoleLevels.ID	int		Yes	33038	
ScaleMax	Maximum scale		int		No		0
ScaleMin	Minimum scale		int		No		0
schaalcode	Scale codes		char	2	Yes	10452	
schaalsrt	Scale types		char	2	Yes	10474	
syscreated	Created date and time		datetime		No	0	
syscreator	Creator	Humres.Res_ID	int		No	0	0
sysguid	sysguid		uniqueidentifier		No	0	
sysmodified	Modified date and time		datetime		No	0	
sysmodifier	Modifier	Humres.Res_ID	int		No	0	0
timestamp	timestamp		timestamp		No	361	
vert_grp	Vertical group	hrfree.reckey	char	10	Yes	29534	
wkcp_risk	Workers' Compensation Risk Code		char	4	Yes	33039	
xdefratelv	Rate level	DDTests	char	1	Yes	23980	

52.5 HRMainFint

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Description	Component type		char	50	Yes	4243	
Division	Division		smallint		Yes	64	
GraphColor	Color		int		No	5865	(0)
ID	ID		char	8	No	4138	
ViewOrder	Order		int		Yes	3558	(0)

52.6 Hrfin

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Comp_type	Component type	Hrfint.Comp_type	char	8	Yes	9175	
Division	Division	Bedryf.Division	smallint	2	Yes		
Employee_amt	Employee amount		float	8	No	30102	'0.0'
Employer_amt	Employer amount		float	8	No	30100	'0.0'
End_date	End date		datetime	8	Yes	22526	
Gn	Gross/Net		char	1	Yes	11114	
Hours	Hours		float	8	No		'0'
ID	ID		int	4	No		
Line	Line number		smallint	2	No	1117	'0'
Notes	Notes		text	16	Yes		
Pay_period	Payment period		char	1	Yes	24946	
Pay_type	Payment type		int	4	No	8314	'1'
Res_id	Resource ID	Humres.Res_id	int	4	No	12	'0'
Start_date	Start date		datetime	8	Yes	3392	
Syscreated	Created date and time		datetime	8	No		Getdate()
Syscreator	Creator	Humres.Res_ID	int	4	No		'0'
Sysguid	Sysguid		uniqueidentifier	16	No		Newid()
Sysmodified	Modified date and time		datetime	8	No		Getdate()
Sysmodifier	Modifier	Humres.Res_ID	int	4	No		'0'
Timestamp	Timestamp		timestamp	8	No		
Valcode	Currency code	Valuta.valcode	char	3	Yes	9192	

52.7 Hrfint

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Comp_type	Component type		char	8	Yes	9175	
Country	Country	Land.Landcode	char	3	Yes	2356	
Currency	Currency		char	3	Yes		
Def_amt	Default amount		float	8	No		'0.0'
DefAmtEditable	Default amount editable		bit	1	No		'1'
Descr50_0	Description		char	50	yes	4243	
Descr50_1	Description		char	50	yes	4243	
Descr50_2	Description		char	50	yes	4243	
Descr50_3	Description		char	50	yes	4243	
Descr50_4	Description		char	50	yes	4243	
Division	Division		smallint	2	yes		
DocID	Document ID		uniqueidentifier	16	Yes	29273	
Employee_ny	Employee		tinyint	1	no	9551	'0'
Employer_ny	Employer		tinyint	1	no	5796	'0'
Enddate	End date		datetime	8	Yes		
Fingroup	Type		char	1	Yes	2560	
Fixed	Fixed/Variable		char	1	Yes	24055	
Gbknr2	Gbknr2		char	9	Yes		
Glac	General ledger account	Grtbk.reknr	char	9	Yes	17974	
Gn	Gross/Net		char	1	Yes	11114	
ID	ID		int	4	No		
JobActivity	Job activity		char	10	Yes		
MainType	Main type		char	8	Yes		
Notes	Notes		int	4	Yes	19582	
Pay_period	Payment period		char	1	Yes	24946	
Payroll	Payroll		tinyint	1	No	8457	'0'
Scale	Scale		int	4	No		'0'
Startdate	Start date		datetime	8	Yes		
Syscreated	Created date and time		datetime	8	no		Getdate()
Syscreator	Creator	Humres.Res_ID	int	4	No		'0'
Sysguid	Sysguid		uniqueidentifier	16	No		Newid()
Sysmodified	Modified date and time		datetime	8	No		Getdate()

Hrfint

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Sysmodifier	Modifier	Humres.Res_ID	int	4	No		'0'
Timestamp	Timestamp		Timestamp	8	No		
Toe_srt	Toe_srt		char	1	Yes		
Unit	Unit		char	1	Yes	2976	

52.8 AbsenceEntitlements

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
AbsenceType	Request types	AbsenceTypes.ID	int	4	No	16674	
CompanyCode	Division	Bedryf.Bednr	char	3	Yes		
Days	Number of day		float	8	No	1722	(0)
Division	Division		smallint	2	Yes		
EmpID	Resource	Humres.Res_ID	int	10	Yes	12	
ID	Guid		uniqueidentifier	16	No	31212	
Hours	Number of hour		float	8	No	1723	(0)
JobGroup	Job group		Char	10	Yes	29538	
Scale	Scale		float		No	22743	(0.0)
Syscreated	Created date and time		datetime	8	No	0	
Syscreator	Creator	Humres.Res_ID	int	4	No	0	(0)
Sysmodified	Modified date and time		datetime	8	No	0	
Sysmodifier	Modifier	Humres.Res_ID	int	4	No	0	(0)

52.9 PublicHolidays

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Country	Country	Land.LandCode	char	3	Yes	2356	
Date	Date		datetime	8	No	8516	
Deduct	Deduct		bit		No		(0)
Description	Description		varchar	60	Yes	4243	
Division	Division	Bedryf.Bednr	char	3	Yes	64	
DivisionX	DivisionX		smallint	2	Yes		
ID	Guid		uniqueidentifier	16	No	31212	
MainLoc	Main location	Hrloc.Loc	char	10	Yes	6995	
Syscreated	Created date and time		datetime	8	No	0	
Syscreator	Creator	Humres.Res_ID	int	4	No	0	(0)
Sysmodified	Modified date and time		datetime	8	No	0	
Sysmodifier	Modifier	Humres.Res_ID	int	4	No	0	(0)

52.10 WorkSchedules

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CompanyCode	Division	Bedryf.Bednr	char	3	Yes		
Division	Division		smallint	2	Yes	64	
EmplID	Resource	Humres.Res_ID	int	10	Yes	12	
EndTime	End time		datetime	8	Yes	1721	
ID	Guid		uniqueidentifier	16	No	31212	
StartTime	Start time		datetime	8	Yes	1719	
Syscreated	Created date and time		datetime	8	No	0	
Syscreator	Creator	Humres.Res_ID	int	4	No	0	(0)
Sysmodified	Modified date and time		datetime	8	No	0	
Sysmodifier	Modifier	Humres.Res_ID	int	4	No	0	(0)
WeekDay	Weekday		int	4	No	6969	

52.11 Pwrole

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Descr64	Description		char	64	Yes		
Division	Division		smallint	2	Yes	64	
Job_group	Job group		char	10	Yes		
Rb_id	Role bar ID		int	4	No		'0'
Role_id	Role ID		int	4	No		
Role_name	Role name		char	20	Yes		
Syscreated	Created date & time		datetime	8	No		getdate()
Syscreator	Creator	Humres.Res_ID	int	4	No		'0'
Sysguid	Sysguid		uniqueidentifier	16	No		newid()
Sysmodified	Modified date & time		datetime	8	No		getdate()
Sysmodifier	Modifier	Humres.Res_ID	int	4	No		'0'
Timestamp	Timestamp		timestamp	8	No		
Visible	Visible		tinyint	1	No		'1'

52.12 Pwrprm

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Division	Division		smallint	2	Yes	64	
Fnc_id	Function ID	Pwfunc.Fnc_ID	char	20	Yes		
ID	ID		int	4	No		
Right_id	Right ID		int	4	No		'0'
Role_id	Role ID	Pwrole.Role_ID	int	4	No		'0'
Syscreated	Created date & time		datetime	8	No		getdate()
Syscreator	Creator	Humres.Res_ID	int	4	No		'0'
Sysguid	Sysguid		uniqueidentifier	16	No		newid()
Sysmodified	Modified date & time		datetime	8	No		getdate()
Sysmodifier	Modifier	Humres.Res_ID	int	4	No		'0'
Timestamp	Timestamp		timestamp	8	No		

52.13 Pwruc

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Division	Division		smallint	2	Yes	64	
ID	ID		int	4	No		
Res_id	Human resource ID	Humres.Res_ID	int	4	No		'0'
Role_id	Role ID	Pwrole.Role_ID	int	4	No		'0'
Rolelevel	Role level		int	4	No		'0'
Syscreated	Created date & time		datetime	8	No		getdate()
Syscreator	Creator	Humres.Res_ID	int	4	No		'0'
Sysguid	Sysguid		uniqueidentifier	16	No		newid()
Sysmodified	Modified date & time		datetime	8	No		getdate()
Sysmodifier	Modifier	Humres.Res_ID	int	4	No		'0'
Timestamp	Timestamp		timestamp	8	No		

52.14 HRRoles

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Division	Division		smallint	2	Yes	64	
EmplID	Resource	humres.res_id	int	4	No	12	
ID	ID		uniqueidentifier	16	No	31212	
RoleID	Role	HRRoleDefs.ID	int	4	No	27454	
RoleLevel	Level	HRRoleLevels.ID	int	4	No	1481	

52.15 HRRoleDefs

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Description	Description		varchar	60	No	4243	
Division	Division		smallint		Yes	64	
Doc_id	Policy	BacoDiscussions.ID	uniqueidentifier		Yes	261	
ID	ID		int		No	31212	
JobGroup	JobGroup		char	10	Yes		
NTGroup	Domain - Group		varchar	60	Yes		

52.16 HRRoleLevels

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Description	Description		varchar	60	No	4243	
Division	Division		smallint	2	Yes	64	
ID	ID		int	4	No	31212	
TermID	Term ID		int	4	Yes		

52.17 Hrsk

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Division	Division		smallint	2	Yes	64	
ID	ID		int	4	No	31212	
line	Line number		smallint	2	No	1117	(0)
res_id	Resource	humres.res_id	int	4	No	12	(0)
skill_type	Skill type		char	60	Yes	29645	
sklevel	Level		char	1	Yes	1481	
syscreated	Created date and time		datetime	8	No	0	(getdate())
syscreator	Creator	humres.res_id	int	4	No	0	(0)
sysguid	SysGuid		uniqueidentifier	16	No	0	(newid())
sysmodified	Modified date and time		datetime	8	No	0	(getdate())
sysmodifier	Modifier	humres.res_id	int	4	No	0	(0)
timestamp	Timestamp		timestamp	8	No	361	

52.18 ResourceStatus

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Description	Description		varchar	60	No	4243	
Division	Division		smallint	2	Yes	64	
Status	Status		char	1	No	4332	
TermID	Term ID		int	4	No		

52.19 ResourceTypes

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Description	Description		varchar	60	No	4243	
Division	Division		smallint	2	Yes	64	
TermID	Term ID		int	4	No		
Type	Type		char	1	No	3801	

52.20 StockOptions

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CompanyName	Name		varchar	255	Yes	206	
Currency	Currency	valuta.valcode	varchar	3	Yes	8509	
Division	Division		smallint	2	Yes	64	
EmplID	Resource	humres.res_id	int	4	No	12	
EndDate	End date		datetime	8	Yes	22526	
ExercisePrice	Exercise price		float	8	Yes	189	
ID	ID		int	4	No	31212	
Notes	Remarks		text	16	Yes	228	
PremiumAmount	Premium		float	8	Yes	273	
Qty	Quantity		float	8	Yes	9616	
syscreated	Created date and time		datetime	8	No		(getdate())
syscreator	Creator	humres.res_id	int	4	No		(0)
sysmodified	Modified date and time		datetime	8	No		(getdate())
sysmodifier	Modifier	humres.res_id	int	4	No		(0)

StockOptions

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
TransactionDate	Transaction : Date		datetime	8	Yes	3257 8516	
TransactionType	Type		char	1	Yes	3801	
VestingDate	Vesting date		datetime	8	Yes	190	

52.21 HREffectiveDateDataLog

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Division	Division		smallint	2	Yes	64	
EffectiveDate	Effective date		datetime	8	No	4888	getdate()
FieldName	Field name		Varchar	50	No	5331	
ID	ID		int	4			
NewValue	New value		Varchar	255	Yes	2755	
OldValue	Old value		Varchar	255	Yes	2754	
Res_id	Resource	Humres.Res_id	int	4	No	12	'0'
Status	Status		char	1	Yes	4332	
Syscreated	Created date & time		datetime	8	No		getdate()
Syscreator	Creator	Humres.Res_id	int	4	No		'0'
Sysguid	SysGuid		uniqueidentifier	16	No		newid()
Sysmodified	Modified date & time		datetime	8	No		getdate()
Sysmodifier	Modifier	Humres.Res_id	int	4	No		'0'
TableName	Table name		varchar	50	No	10700	
Timestamp	Timestamp		timestamp	8	No		
UpdateContractEnd	UpdateContractEnd		tinyint		No		0

52.22 HRHumresLinks

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
ChildID	Children (Applicant)		int	4	No	24759	
Division	Division		smallint	2	Yes	64	
ID	ID		int	4	No		
MainLink	Main link		bit	1	No		'0'
Res_id	Resource (Vacancy)		int	4	No	8148	
Syscreated	Created date & time		datetime	8	No		Getdate()
Syscreator	Creator	Humres.Res_ID	int	4	No		'0'
Sysmodified	Modified date & time		datetime	8	No		Getdate()
Sysmodifier	Modifier	Humres.Res_ID	int	4	No		'0'
Timestamp	Timestamp		timestamp	8			
Type	Type		char	1	Yes	3801	

52.23 Hrwdoc

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Descr40_0	Multilanguage description 0		varchar	40	Yes	4243	
Descr40_1	Multilanguage description 1		varchar	40	Yes	4243	
Descr40_2	Multilanguage description 2		varchar	40	Yes	4243	
Descr40_3	Multilanguage description 3		varchar	40	Yes	4243	
Descr40_4	Multilanguage description 4		varchar	40	Yes	4243	
Division	Division		smallint	2	Yes	64	
Doc_code	Document template name		char	8	Yes	7226	
Docid	Document GUID		uniqueidentifier	16	Yes		
ID	ID		int	4	Yes		
MergeType	Merge Type		char	1	Yes		
Syscreated	Created date & time		datetime	8	No		getdate()
Syscreator	Creator	Humres.Res_ID	int	4	No		'0'
Sysguid	Sysguid		uniqueidentifier	16	No		newid()
Sysmodified	Modified date & time		datetime	8	No		getdate()
Sysmodifier	Modifier	Humres.Res_ID	int	4	No		'0'
Timestamp	Timestamp		timestamp	8	No		
Type	Type		char	1	Yes	1769	

52.24 HRCompetencies

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Description	Description		varchar	60	Yes	4243	
Division	Division		smallint	2	Yes	64	
ID	ID		int	4	No	31212	
sysmodified	Modified date and time		datetime	8	No		(getdate())
sysmodifier	Modifier	humres.res_id	int	4	No		(0)

52.25 HRCompetencyRatings

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CompetencyID	Competency	HRCompetencies.ID	int	4	No	492	
Division	Division		smallint	2	Yes	64	
EmpID	Resource	humres.res_id	int	4	No	12	
ID	ID		uniqueidentifier	16	Yes	31212	
Rating	Rating		char	1	Yes	263	
ReferenceDate	Reference: date		datetime	8	No		
syscreated	Created date and time		datetime	8	No		(getdate())
syscreator	Creator	humres.res_id	int	4	No		(0)
sysmodified	Modified date and time		datetime	8	No		(getdate())
sysmodifier	Modifier	humres.res_id	int	4	No		(0)

52.26 HRMCompetenceGroups

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CreatedBy	Creator	Humres.Res_ID	int	4	No		'0'
CreatedDate	Created date and time		datetime	8	No		Getdate()
Description	Description		varchar	100	Yes	4243	
Division	Division	Bedryf.Division	smallint	2	Yes	64	
ID	ID		uniqueidentifier	16	No		Newid()
Levels	Level		int	4	No	22267	'0'
ModifiedBy	Modifier	Humres.Res_ID	int	4	No		Suser_sname()
ModifiedDate	Modified date and time		datetime	8	No		Getdate()
Type	Type		char	1	No	3801	'C'

52.27 HRMCompetenceProfiles

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CompanyCode	Company code		char	3	Yes		
CreatedBy	Creator	Humres.Res_ID	int	4	No		'0'
CreatedDate	Created date and time		datetime	8	No		Getdate()
Description	Description		char	100	Yes	4243	
Division	Division	Bedryf.Division	smallint	2	Yes	64	
EndDate	End date		datetime	8	Yes		
ID	ID		uniqueidentifier	16	No		Newid()
ItemCode	Item code	Items.ItemCode	varchar	30	Yes		
JobActivity	Job activity		char	10	Yes		
JobGroup	Job group		char	10	Yes		
JobTitle	Job title	HrjbtL.Job_title	char	12	Yes	29537	
ModifiedBy	Modifier	Humres.Res_ID	int	4	No		'0'
ModifiedDate	Modified date and time		datetime	8	No		Getdate()
Project	Project	PrProject.ProjectNr	char	20	Yes		
Rating	Rating		char	3	Yes	263	
RequestId	Request ID		uniqueidentifier	16	Yes		
RequestStartDate	Request start date		datetime	8	Yes		
ResourceID	Resource ID	Humres.Res_ID	int	4	Yes		
ReviewerID	Reviewer ID		int	4	Yes		
StartDate	Start date		datetime	8	Yes	3392	
Status	Status		char	1	No		'N'
Type	Type		char	2	Yes	3801	
Weight	Weight		float	8	Yes		

52.28 HRMCompetences

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CreatedBy	Creator	Humres.Res_ID	int	4	No		'0'
CreatedDate	Created date and time		datetime	8	No		Getdate()
Description	Description		varchar	100	Yes	4243	
Division	Division	Bedryf.Division	smallint	2	Yes	64	
DocAttachmentID	Policy		uniqueidentifier	16	Yes	261	

HRMCompetences

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
FieldTypeId	Field type ID	HRMFieldTypes.ID	uniqueidentifier	16	Yes	1759	
GroupId	Group ID	HRMCompetenceGroups.ID	uniqueidentifier	16	Yes	2560	
ID	ID		uniqueidentifier	16	No		Newid()
Level	Level		int	4	No	22267	'0'
LinkedToId	Linked to ID		uniqueidentifier	16	Yes	8727	
ModifiedBy	Modifier	Humres.Res_ID	int	4	No		
ModifiedDate	Modified date and time		datetime	8	No		Getdate()
Notes	Notes		text	16	Yes	19582	
ParentId	Parent ID		uniqueidentifier	16	Yes		
SequenceNumber	Sequence number		smallint	2	No		
Type	Type		char	1	No	3801	'C'

52.29 HRMCompetenceLinks

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CompetenceId	Competence ID	HRMCompetences.ID	uniqueidentifier	16	Yes		
CreatedBy	Creator	Humres.Res_ID	int	4	No		'0'
CreatedDate	Created date and time		datetime	8	No		Getdate()
DateValue	Date value		datetime	8	Yes		
Division	Division	Bedryf.Division	smallint	2	Yes	64	
DoubleValue	Double value		float	8	Yes		
FormElementId	From element ID	HRMFormElements.ID	uniqueidentifier	16	Yes		
GroupSequenceNr	Group sequence number		smallint	2	No		'0'
GuidValue	Guid value		uniqueidentifier	16	Yes		
ID	ID		uniqueidentifier	16	No		Newid()
ModifiedBy	Modifier	Humres.Res_ID	int	4	No		'0'
ModifiedDate	Modified date and time		datetime	8	No		Getdate()
ProfileId	Profile ID	HRMCompetenceProfiles.ID	uniqueidentifier	16	Yes		
SelectionValue	Selection value		smallint	2	Yes		
StringValue	String value		varchar	100	Yes		
Weight	Weight		Float	8	Yes		
YesNoValue	Yes/No value		bit	1	Yes		

52.30 HRMSelectionValues

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CreatedBy	Creator	Humres.Res_ID	int	4	No		'0'
CreatedDate	Created date and time		datetime	8	No		Getdate()
Description	Description		varchar	100	Yes	4243	
DisplayValue	Display value		char	3	Yes		
Division	Division	Bedryf.Division	smallint	2	Yes	64	
FieldTypeld	Field type ID	HRMFieldTypes.ID	uniqueidentifier	16	Yes		
ID	ID		uniqueidentifier	16	No		Newid()
Maximum	Maximum		float	8	Yes	1145	
Minimum	Minimum		float	8	Yes	31421	
ModifiedBy	Modifier	Humres.Res_ID	int	4	No		'0'
ModifiedDate	Modified date and time		datetime	8	No		Getdate()
Notes	Notes		text	16	Yes	19582	
SequenceNumber	Sequence number		smallint	2	No	9546	'0'
Value	Value		smallint	2	No	2514	'0'
Weight	Weight		float	8	Yes	1389	

52.31 HRMFormLayouts

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Assortment	Assortment		int	4	Yes		
CompanyCode	Company code		char	3	Yes		
CreatedBy	Creator	Humres.Res_ID	int	4	No		'0'
CreatedDate	Created date and time		datetime	8	No		Getdate()
Description	Description		varchar	100	Yes	4342	
Division	Division	Bedryf.Division	smallint	2	Yes	64	
ID	ID		uniqueidentifier	16	No		Newid()
ModifiedBy	Modifier	Humres.Res_ID	int	4	No		'0'
ModifiedDate	Modified date and time		datetime	8	No		Getdate()
Type	Type		char	3	Yes		

52.32 HRMFormElements

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
AddEmptyValue	Add empty value		bit	1	No		(0)
AutoAuthorizeRole	Auto authorize role		int	4	Yes		
AutoAuthorizeRoleLevel	Auto authorize role level		int	4	Yes		
Caption	Caption		varchar	60	Yes		
ColumnCount	Column count		tinyint	1	No		(0)
CreatedBy	Creator	Humres.Res_ID	int	4	No		(0)
CreatedDate	Created date and time		datetime	8	No		Getdate()
Deselect	Deselect		bit	1	No		(0)
Division	Division	Bedryf.Division	smallint	2	Yes	64	
EditFunction	Edit function		int	4	No		(0)
EditManager	Edit manager		bit	1	No		(1)
EditResource	Edit resource		bit	1	No		(0)
EditSecurityLevel	Edit security level		int	4	No		(0)
EffectiveDateLog	Effective date log		bit	1	No		(0)
FormLayoutId	Form layout ID	HRMFormLayouts.ID	uniqueidentifier	16	Yes		
ID	ID		uniqueidentifier	16	No		Newid()
IsGroup	Is group		bit	1	No		(0)
IsRadioSet	Is radio set		bit	1	No		(0)
Mandatory	Mandatory		tinyint	1	No		(0)
ModifiedBy	Modifier	Humres.Res_ID	int	4	No		(0)
ModifiedDate	Modified date and time		datetime	8	No		Getdate()
ParentElementId	Parent element ID	HRMFormElements.ID	uniqueidentifier	16	Yes		
Reference	Reference		varchar	40	Yes		
RequireAuthorize	Require authorize		bit	1	No		(0)
SequenceNumber	Sequence number		smallint	2	No		(0)
ShowKeyInCombo	Show key in combo		bit	1	No		(0)
TermID	Term ID		int	4	No		(0)
UserDefineCaption	User define caption		varchar	60	Yes		
ViewFunction	View function		int	4	No		(0)
ViewManager	View manager		bit	1	No		(1)
ViewResource	View resource		bit	1	No		(1)
ViewSecurityLevel	View security level		int	4	No		(0)

52.33 HRProcessLogs

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Division	Division	Bedryf.Division	smallint	2	Yes	64	
EmpID	Employee ID		int	4	No		(0)
FieldName	Field name		varchar	50	Yes		
HREffectiveDateDataLogID	HR effective date data log ID		int	4	Yes		
ID	ID		uniqueidentifier	16	No		
OriginalRequest	Original request		uniqueidentifier	16	Yes		
ProcessRequestsID	Process request ID	HRProcessTypes.ID	int	4	No		
ReferenceDate	Reference date		datetime	8	No	1274	
RequestId	Request ID		uniqueidentifier	16	No		
RunNumber	Run number		int	4	No		(0)
syscreated	Created date and time		datetime	8	No		Getdate()
syscreator	Creator	Humres.Res_ID	int	4	No		(0)
sysmodified	Modified date and time		datetime	8	No		Getdate()
sysmodifier	Modifier	Humres.Res_ID	int	4	No		(0)
timestamp	Timestamp		timestamp	8	No		

52.34 HRProcessTypes

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Active	Active		bit	1	No	2212	(1)
AutoGenerate	Auto generate		bit	1	No	13251	(0)
Blocked	Blocked		bit	1	No	27660	(0)
CompanyCode	Division		char	3	Yes	64	
CreateRole_1	View: Role (1)	HRRoleDefs.ID	int	4	Yes		
CreateRole_2	View: Role (2)	HRRoleDefs.ID	int	4	Yes		
CreateRole_3	View: Role (3)	HRRoleDefs.ID	int	4	Yes		
CreateRoleLevel_1	View: Level (of role) (1)	HRRoleLevels.ID	int	4	Yes		
CreateRoleLevel_2	View: Level (of role) (2)	HRRoleLevels.ID	int	4	Yes		
CreateRoleLevel_3	View: Level (of role) (3)	HRRoleLevels.ID	int	4	Yes		
Description	Description		varchar	60	No	4243	
Division	Division	Bedryf.Division	smallint	2	Yes		

HRProcessTypes

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
EndDate	End date		datetime	8	Yes	22526	
FieldName	Field		varchar	60	Yes	5331	
ID	ID		int	4	No	4138	
ProcessManager	Generate: Managers - For:						
Subordinates	EbcProps.SelectionValues	int	4	Yes			
ProcessRole_1	Generate: Role (1)	HRRoleDefs.ID	int	4	Yes		
ProcessRole_2	Generate: Role (2)	HRRoleDefs.ID	int	4	Yes		
ProcessRole_3	Generate: Role (3)	HRRoleDefs.ID	int	4	Yes		
ProcessRoleLevel_1	Generate: Level (of role) (1)	HRRoleLevels.ID	int	4	Yes		
ProcessRoleLevel_2	Generate: Level (of role) (2)	HRRoleLevels.ID	int	4	Yes		
ProcessRoleLevel_3	Generate: Level (of role) (3)	HRRoleLevels.ID	int	4	Yes		
ProcessType	Process type		int	4	No	3801	
RequestType	Request type		int	4	Yes	268	
RightsManager	View: Managers - For:						
Subordinates	EbcProps.SelectionValues	int	4	Yes			
SecurityLevel	Security level		int	4	Yes	209	
StartDate	Start date		datetime	8	No	3392	
syscreated	Created date and time		datetime	8	No		
syscreator	Creator	Humres.Res_ID	int	4	No		(0)
sysmodified	Modified date and time		datetime	8	No		
sysmodifier	Modifier	Humres.Res_ID	int	4	No		(0)
TableName	Table name		varchar	60	Yes		
timestamp	Timestamp		timestamp	8	No		

52.35 HRProcessRequests

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Active	Active		bit	1	No		(1)
Blocked	Blocked		bit	1	No	1267	(0)
Days	Days		float	8	No	1722	(0)
Description	Description		varchar	60	Yes		
Division	Division	Bedryf.Division	smallint	2	Yes	64	
DurationInDays	Duration		float	8	No	5910	(0)
EmpID	Resource		int	4	Yes		
FreeBoolField_1	Free Bool field 1		bit	1	Yes		
FreeBoolField_2	Free Bool field 2		bit	1	Yes		
Freefield_1	Free field 1		uniqueidentifier	16	Yes		
Freefield_2	Free field 2		uniqueidentifier	16	Yes		
FreeIntField_1	Free Int field 1		int	4	Yes		
FreeIntField_2	Free Int field 2		int	4	Yes		
FreeNumberField_1	Free number field 1		float	8	Yes		
FreeNumberField_2	Free number field 2		float	8	Yes		
FreeTextField_1	Free text field 1		varchar	50	Yes		
FreeTextField_2	Free text field 2		varchar	50	Yes		
Frequency	Frequency		int	4	No	6970	(0)
ID	ID		int	4	No		
Maximum	Maximum		int	4	No	1145	(0)
NumberFrequency	Frequency cycle		int	4	No		(1)
Overdue	Generate: Overdue		bit	1	No	226	(0)
PreviousRequest	Previous request		int	4	Yes		
ProcessDescription	Description		varchar	60	Yes	4243	
ProcessTypesID	Process type ID		int	4	No		
Remark	Remark		text	16	Yes		
RequestType	Request type		int	4	Yes		
SequenceNumber	Sequence number		int	4	No		
Status	Request Status/Contract Status		int	4	Yes	4332	
syscreated	Created date and time		datetime	8	No		
syscreator	Creator	Humres.Res_ID	int	4	No		(0)
sysmodified	Modified date and time		datetime	8	No		

HRProcessRequests

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
sysmodifier	Modifier	Humres.Res_ID	int	4	No		(0)
timestamp	Timestamp		timestamp	8	No		
UseDate	Use: Date		int	4	Yes		
UseRequest	Use: Request		int	4	Yes		

52.36 HRFreeFields

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CompanyNr	Company number		char	3	No		
DateField1	Date field 1		varchar	30	Yes		
DateField2	Date field 2		varchar	30	Yes		
DateField3	Date field 3		varchar	30	Yes		
DateField4	Date field 4		varchar	30	Yes		
DateField5	Date field 5		varchar	30	Yes		
Division	Division	Bedryf.Division	smallint	2	Yes	64	
ID	ID		uniqueidentifier	16	No		Newid()
NumberField1	Number field 1		varchar	30	Yes		
NumberField2	Number field 2		varchar	30	Yes		
NumberField3	Number field 3		varchar	30	Yes		
NumberField4	Number field 4		varchar	30	Yes		
NumberField5	Number field 5		varchar	30	Yes		
TableName	Table name		sysname	256	No		
TextField1	Text field1		varchar	30	Yes		
TextField2	Text field2		varchar	30	Yes		
TextField3	Text field3		varchar	30	Yes		
TextField4	Text field4		varchar	30	Yes		
TextField5	Text field5		varchar	30	Yes		
YesNoField1	Yes/No field 1		varchar	30	Yes		
YesNoField2	Yes/No field 2		varchar	30	Yes		
YesNoField3	Yes/No field 3		varchar	30	Yes		
YesNoField4	Yes/No field 4		varchar	30	Yes		
YesNoField5	Yes/No field 5		varchar	30	Yes		

52.37 HREmployeePeriods

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
DaysAbsent	Days absent		float	8	No		(0)
DaysWorked	Days worked		float	8	No		(0)
Division	Division	Bedryf.Division	smallint	2	Yes		
EmplID	Resource ID		int	4	No		
FinPeriod	Financial period		int	4	No		
FinYear	Financial year		int	4	No		
HoursAbsent	Hours absent		float	8	No		(0)
HoursWorked	Hours worked		float	8	No		(0)
ID	ID		uniqueidentifier	16	No		
syscreated	Created date and time		datetime	8	No		
syscreator	Creator	Humres.Res_ID	int	4	No		(0)
sysmodified	Modified date and time		datetime	8	No		
sysmodifier	Modifier	Humres.Res_ID	int	4	No		(0)

52.38 HRErrorLog

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
AppName	Application name		char	50	Yes		
Comp	Comp		char	3	Yes		
Created	Created date and time		datetime	8	No	2468	Getdate()
Creator	Creator	Humres.Res_ID	int	4	No	257	
Description	Remarks		char	255	Yes	228	
Division	Division	Bedryf.Division	smallint	2	Yes		
ID	ID		uniqueidentifier	16	No		Newid()
Status	Status		int	4	Yes	4332	
TransID	Transaction ID		uniqueidentifier	16	No		
TransType	Transaction type		char	30	Yes		
Value1	E-Mail		varchar	255	Yes	5804	
Value2	Value 2		varchar	255	Yes		
Value3	Value 3		varchar	255	Yes		

52.39 HRPasswds

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Division	Division	Bedryf.Division	smallint	2	Yes	64	
ID	ID		uniqueidentifier	16	No		Newid()
Type	Type		int	4	Yes		
Word	Word		char	10	Yes		

52.40 Hrloc

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
addr_no	Number		char	10	Yes	3718	
addr_suf	Suffix		char	2	Yes	32355	
city	City		char	30	Yes	10869	
country	Country		char	3	Yes	2356	
descr50	Description		char	50	Yes	4243	
Division	Division		smallint	2	Yes		
faxnr	Fax		char	15	Yes	5793	
ID	ID		int	4	No		
loc	Location		char	10	Yes	18818	
postcode	Postal code		char	8	Yes	1664	
StateCode	State		char	3	Yes	59	
street_0	Address		char	30	Yes		
street_1	Address 2		char	30	Yes		
syscreated	Created date and time		datetime	8	No	0	
syscreator	Creator	Humres.Res_ID	int	4	No	0	(0)
sysguid	Sysguid		uniqueidentifier	16	No	0	
sysmodified	Modified date and time		datetime	8	No	0	
sysmodifier	Modifier	Humres.Res_ID	int	4	No	0	(0)
telnr	Telephone		char	15	Yes	1339	
timestamp	Timestamp		timestamp	8	No		
WeekendEnd	Weekend End		int	4	No	339	(7)
WeekendStart	Weekend Start		int	4	No	339	(6)
xaddress2	Extra address		char	30	Yes	9180	

52.41 CompanyClassNames

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
ClassID	Group		int	4	No	2560	
Description	Description		varchar	60	Yes	4243	
Division	Division		smallint	2	Yes	64	
timestamp	Timestamp		timestamp	8	No	361	

52.42 CompanyClasses

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
ClassID	Group	CompanyClassNames.ClassID	int	4	No	2560	
CompanyClassCode	Subgroup		varchar	30	No	7739	
Description	Description		varchar	60	Yes	4243	
Division	Division		smallint	2	Yes	64	
ID	ID		uniqueidentifier	16	No	31212	(newid())
timestamp	Timestamp		timestamp	8	No	361	

52.43 Notes

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Division	Division		smallint	2	Yes	64	
Guid	Guid		uniqueidentifier	16	Yes		(newid())
ID	ID		int	4	No	31212	
note	Note		text	16	Yes	8873	
timestamp	Timestamp		timestamp	8	No	361	

52.44 DeletionLogs

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CompanyCode	Company	bedryf.bedrnd	char	3	No		
Division	Division		smallint		Yes		
ID	ID		int		No		
KeyDate1	Key date field 1		datetime		Yes		
KeyDate2	Key date field 2		datetime		Yes		
KeyDate3	Key date field 3		datetime		Yes		
KeyGuid1	Key Guid field 1		uniqueidentifier		Yes		
KeyGuid2	Key Guid field 2		uniqueidentifier		Yes		
KeyGuid3	Key Guid field 3		uniqueidentifier		Yes		
KeyInt1	Key integer field 1		int		Yes		
KeyInt2	Key integer field 2		int		Yes		
KeyInt3	Key integer field 3		int		Yes		
KeyInt4	Key integer field 4		int		Yes		
KeyInt5	Key integer field 5		int		Yes		
KeyString1	Key string field 1		varchar	50	Yes		
KeyString2	Key string field 2		varchar	50	Yes		
KeyString3	Key string field 3		varchar	50	Yes		
KeyString4	Key string field 4		varchar	50	Yes		
KeyString5	Key string field 5		varchar	50	Yes		
syscreated	Created date and time		datetime		No		(getdate())
syscreator	Creator	humres.res_id	int		No		(0)
sysguid	SysGuid		uniqueidentifier		No		(newid())
TableName	Table name		varchar	100	No		
timestamp	Timestamp		timestamp		Yes		

52.45 HrComponents

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Account	Account	cicmpy.cmp_wwn	uniqueidentifier		Yes	8	
age	Age		smallint		No	17481	0
bankaccount	Bank account	Bnkacc.Bnknr / Bnkkop.Bank_rek	char	34	Yes	1944	
blocked	Blocked		tinyint		No	1267	1
comp_code	Component		char	8	No	4138	
comp_status	Status	DDTests	char	1	Yes	4332	
comp_sub_type	Sub type		char	4	Yes	7737	
comp_type	Type	DDTests	char	1	Yes	3801	
comp_visible	Component is visible	DDTests	char	1	Yes	0	
companyCode	Company Code		Char	3	Yes	5642	
country	Country	land.landcode	char	3	Yes	2356	
country_char1	Country char1		char	1	Yes	0	
country_char2	Country char2		char	1	Yes	0	
country_char3	Country char3		char	1	Yes	0	
country_char4	Country char4		char	1	Yes	0	
country_char5	Country char5		char	1	Yes	0	
country_char6	Country char6		char	1	Yes	0	
country_char7	Country char7		char	1	Yes	0	
country_char8	Country char8		char	1	Yes	0	
country_char9	Country char9		char	1	Yes	0	
country_float1	Country float1		float		No	0	0.0
Country_float10	Country float10		float		No	0	0.0
Country_float11	Country float11		float		No	0	0.0
Country_float12	Country float12		float		No	0	0.0
country_float2	Country float2		float		No	0	0.0
country_float3	Country float3		float		No	0	0.0
country_float4	Country float4		float		No	0	0.0
country_float5	Country float5		float		No	0	0.0
country_float6	Country float6		float		No	0	0.0
Country_float7	Country float7		float		No	0	0.0
Country_float8	Country float8		float		No	0	0.0
Country_float9	Country float9		float		No	0	0.0

HrComponents

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
country_guid1	country_guid1		uniqueidentifier		Yes	0	
country_guid2	country_guid2		uniqueidentifier		Yes	0	
country_ny1	Country ny1		tinyint		No	0	0
country_ny10	Country ny10		tinyint		No	0	0
country_ny11	Country ny11		tinyint		No	0	0
country_ny12	Country ny12		tinyint		No	0	0
country_ny13	Country ny13		tinyint		No	0	0
country_ny14	Country ny14		tinyint		No	0	0
country_ny15	Country ny15		tinyint		No	0	0
country_ny16	Country ny16		tinyint		No	0	0
country_ny17	Country ny17		tinyint		No	0	0
country_ny18	Country ny18		tinyint		No	0	0
country_ny2	Country ny2		tinyint		No	0	0
country_ny3	Country ny3		tinyint		No	0	0
country_ny4	Country ny4		tinyint		No	0	0
country_ny5	Country ny5		tinyint		No	0	0
country_ny6	Country ny6		tinyint		No	0	0
country_ny7	Country ny7		tinyint		No	0	0
country_ny8	Country ny8		tinyint		No	0	0
country_ny9	Country ny9		tinyint		No	0	0
country_string1	Extra		char	75	Yes	8915	
creditor	Creditor	cicntp.crdnr	char	6	Yes	8504	
creditor_account	Creditor account	grtbk.rekrnr	char	9	Yes	455	
creditor_costcenter	Cost center	kstpl.kstplcode	char	8	Yes	8494	
creditor_costunit	Cost unit	kstdr.kstdrcode	char	8	Yes	1194	
currency	Currency	valuta.valcode	char	3	Yes	9192	
default_amount	Amount		float		No	4182	0.0
default_percentage	Percentage		float		No	8466	0.0
DefaultHourlyWage	Default Houly Wage		float		No	11303	0.0
descr50_0	Multi language description		varchar	50	Yes		
descr50_1	Multi language description 1		varchar	50	Yes		
descr50_2	Multi language description 2		varchar	50	Yes		
descr50_3	Multi language description 3		varchar	50	Yes		

HrComponents

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
descr50_4	Multi language description 4		varchar	50	Yes		
Division	Division		smallint	2	Yes	64	
DocAttachmentID	Attachments	BacoDiscussions.ID	uniqueidentifier		Yes	31261	
edit_resource_level	Editable on resource level		tinyint		No	0	1
enddate	End date		datetime		Yes	22526	
formulafield	Formula field		varchar	2000	Yes	0	
ID	ID		int		No	0	
JobActivity	Job activity	hrfree.rexkey	char	10	Yes	0	
ledger_account	General ledger account	grtbk.rekrnr	char	9	Yes	17974	
ledger_costcenter	General ledger cost center	kstpl.kstplcode	char	8	Yes	22159	
ledger_costunit	General ledger cost unit	kstdr.kstdrcode	char	8	Yes	22160	
LedgerType	Financial account type	DDTests	char	1	Yes	22481	C
LocalCode	Local		char	4	Yes	32198	
MainType	Main type		char	8	Yes	0	
notes	Notes	BacoDiscussions.ID	uniqueidentifier		Yes	19582	
Origin	Origin	DDTests	char	1	No	11412	N
OriginalCode	Original code		char	8	Yes	0	
paid_by	Paid by	DDTests	char	1	Yes	11503	
parent_code	Parent code		char	8	Yes	0	
payment_period	Payment period	DDTests	char	1	Yes	24946	
payroll	Payroll		tinyint		No	8457	0
Priority	Priority		Smallint	2	No	3217	0
scale	Scale		char	9	Yes	10452	
startdate	Start date		datetime		No	3392	
StateCode	State	AddressStates.StateCode	char	3	Yes	31215	
syscreated	syscreated		datetime		No	0	
syscreator	syscreator	humres.res_id	int		No	0	0
sysguid	sysguid		uniqueidentifier		No	0	
sysmodified	sysmodified		datetime		No	0	
sysmodifier	sysmodifier	humres.res_id	int		No	0	0
timestamp	timestamp		timestamp		No		
unit	Unit	DDTests	char	1	Yes	2976	

52.46 HrComp_Resource

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
amount	Amount		float		No	4182	0.0
bankaccount	Bank account	Bnkacc.Bnknr / Bnkkop.Bank_rek	char	34	Yes	1944	
comp_code	Component	hrcomponents.comp_code	char	8	No	4138	
CompanyCode	Company	bedryf.bednr	char	3	Yes	5642	
ComponentGuid	Component Guid		uniqueidentifier		No	0	
contract	Contract		smallint		No	10421	0
country_char1	Country char1		char	1	Yes	0	
country_char2	Country char2		char	1	Yes	0	
country_char3	Country char3		char	1	Yes	0	
Country_date1	Country date 1		datetime	8	Yes	0	
Country_date2	Country date 2		datetime	8	Yes	0	
Country_float1	Country float1		float		No	0	0.0
Country_float2	Country float2		float		No	0	0.0
Country_float3	Country float3		float		No	0	0.0
Country_float4	Country float4		float		No	0	0.0
Country_float5	Country float5		float		No	0	0.0
country_ny1	Country ny1		tinyint		No	0	0
country_ny2	Country ny2		tinyint		No	0	0
country_ny3	Country ny3		tinyint		No	0	0
creditor	Creditor	cicmpy.crdnr	char	6	Yes	8504	
creditor_account	Creditor account	grtbk.reknr	char	9	Yes	455	
creditor_costcenter	Cost center	kstpl.kstplcode	char	8	Yes	8494	
creditor_costunit	Cost unit	kstdr.kstdrcode	char	8	Yes	1194	
deviating_descr50	Description		varchar	50	Yes	4243	
Division	Division		smallint	2	Yes	64	
DocAttachmentID	Attachments	BacoDiscussions.ID	uniqueidentifier		Yes	31261	
enddate	End date		datetime		Yes	22526	
hourlywage	Hourly wage		float		No	11303	0.0
ID	ID		int		No	0	
Job_title	Job title	hrjbtl.job_title	char	12	Yes	29537	
ledger_account	General ledger account	grtbk.reknr	char	9	Yes	17974	
ledger_costcenter	Cost center	kstpl.kstplcode	char	8	Yes	8494	

HrComp_Resource

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
ledger_costunit	Cost unit	kstdr.kstdrcode	char	8	Yes	1194	
LocalCode	Local		char	4	Yes	32198	
notes	Notes	BacoDiscussions.ID	uniqueidentifier		Yes	19582	
number	Quantity		float		No	9616	0.0
number_days_period	Number of days		float		No	1938	0.0
paid_by	Paid by	DDTests	char	1	Yes	11503	
percentage	Percentage		float		No	8466	0.0
Priority	Priority		smallint		No	3217	0
Project	Project	PRProject.ProjectNr	char	20	Yes	8657	
ReferenceCode	Reference code		char	8	Yes	0	
ReferenceNr1	Reference		varchar	20	Yes	5961	
ReferenceNr2	Extra reference		varchar	20	Yes	12576	
res_id	Resource	humres.res_id	int		No	12	0
SalaryScale	Salary scale		varchar	10	Yes	10437	
Scale	Scale		char	9	Yes	23643	
startdate	Start date		datetime		No	3392	
StateCode	State	AddressStates.StateCode	char	3	Yes	31215	
syscreated	syscreated		datetime		No	0	
syscreator	syscreator	humres.res_id	int		No	0	0
sysguid	sysguid		uniqueidentifier		No	0	
sysmodified	sysmodified		datetime		No	0	
sysmodifier	sysmodifier	humres.res_id	int		No	0	0
timestamp	timestamp		timestamp		No		

52.47 HrComp_Trans

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
amount_costs	Costs		float		No	11690	0.0
amount_to_be_paid	To be paid		float		No	6153	0.0
bankaccount	Bank account	Bnkacc.Bnknr / Bnkkop.Bank_rek	char	34	Yes	1944	
base_value	Basis		float		No	5444	0.0
calc_country_float1	Calculation country float1		float		No	0	0.0
calc_country_float2	Calculation country float2		float		No	0	0.0
calc_country_float3	Calculation country float3		float		No	0	0.0
calculationdate	Calculation date		datetime		No	12351	
comp_code	Component	hrcomponents.comp_code	char	8	No	4138	
comp_sub_type	Sub type	hrcomponents.comp_sub_type	char	4	Yes	7737	
comp_type	Type	DDTests	char	1	Yes	3801	
companycode	Company	bedryf.bednr	char	3	Yes	5642	
ComponentGuid	Component Guid	hrcomp_resource.ComponentGuid	uniqueidentifier		Yes	0	
contract	Contract	hrcomp_resource.contract	smallint		No	10421	0
country	Country	land.landcode	char	3	Yes	2356	
country_char1	Country char1		char	1	Yes	0	
country_char2	Country char2		char	1	Yes	0	
country_char3	Country char3		char	1	Yes	0	
country_char4	Country char4		char	1	Yes	0	
country_char5	Country char5		char	1	Yes	0	
country_char6	Country char6		char	1	Yes	0	
country_char7	Country char7		char	1	Yes	0	
country_char8	Country char8		char	1	Yes	0	
country_char9	Country char9		char	1	Yes	0	
country_float1	Country float1		float		No	0	0.0
country_float2	Country float2		float		No	0	0.0
country_float3	Country float3		float		No	0	0.0
country_float4	Country float4		float		No	0	0.0
country_float5	Country float5		float		No	0	0.0
country_float6	Country float6		float		No	0	0.0
country_ny1	Country ny1		tinyint		No	0	0
country_ny10	Country ny10		tinyint		No	0	0
country_ny11	Country ny11		tinyint		No	0	0

HrComp_Trans

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
country_ny12	Country ny12		tinyint		No	0	0
country_ny13	Country ny13		tinyint		No	0	0
country_ny14	Country ny14		tinyint		No	0	0
country_ny15	Country ny15		tinyint		No	0	0
country_ny16	Country ny16		tinyint		No	0	0
country_ny17	Country ny17		tinyint		No	0	0
country_ny18	Country ny18		tinyint		No	0	0
country_ny2	Country ny2		tinyint		No	0	0
country_ny3	Country ny3		tinyint		No	0	0
country_ny4	Country ny4		tinyint		No	0	0
country_ny5	Country ny5		tinyint		No	0	0
country_ny6	Country ny6		tinyint		No	0	0
country_ny7	Country ny7		tinyint		No	0	0
country_ny8	Country ny8		tinyint		No	0	0
country_ny9	Country ny9		tinyint		No	0	0
country_string1	Extra		char	75	Yes	8915	
creditor	Creditor	cicmpy.crdnr	char	6	Yes	8504	
creditor_account	Creditor account	grtbk.reknr	char	9	Yes	455	
creditor_costcenter	Cost center	kstpl.kstplcode	char	8	Yes	8494	
creditor_costunit	Cost unit	kstdr.kstdrcode	char	8	Yes	1194	
currency	Currency	valuta.valcode	char	3	Yes	9192	
declaration_date	Declaration date		datetime		Yes	0	
declaration_made	Declaration made		tinyint		No	0	0
declaration_number	Declaration number		char	15	Yes	5642	
declaration_period	Return period		smallint		Yes	6909	
declaration_sequence	Sequence number		smallint		Yes	9546	
deviating_descr50	Description		varchar	50	Yes	4243	
Division	Division		smallint	2	Yes	64	
DocAttachmentID	Attachments	BacoDiscussions.ID	uniqueidentifier		Yes	31261	
entry_amount	Amount		float		No	4182	0.0
entry_percentage	Percentage		float		No	8466	0.0
entryorigin	Origin	DDTests	char	1	Yes	11412	
formulafield	Formula field	hrcomponents.formula	varchar	2000	Yes	0	

HrComp_Trans

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
hourlywage	Hourly wage	hrcomp_resource.hourlywage	float		No	11303	0.0
ID	ID		int		No		
ItemCode	Item code	Items.ItemCode	varchar	30	Yes	1102	
ledger_account	General ledger account	grtbk.reknr	char	9	Yes	17974	
ledger_costcenter	Cost center	kstpl.kstplcode	char	8	Yes	8494	
ledger_costunit	Cost unit	kstdr.kstdrcode	char	8	Yes	1194	
LocalCode	Local		char	4	Yes	32198	
notes	Notes	BacoDiscussions.ID	uniqueidentifier		Yes	19582	
number	Number		float		No	9616	0.0
number_days_absent	Number of days absent		float		No	0	0.0
number_days_component	Number of days component		float		No	0	0.0
number_days_period	Number of days		float		No	1938	0.0
ourreference	Our ref.		char	8	Yes	119	
paid_by	Paid by	DDTests	char	1	Yes	11503	
payment_period	Payment period	DDTests	char	1	Yes	24946	
PayrollYear	Year		smallint		Yes	1321	
period	Period		smallint		No	5771	
Priority	Priority		smallint		No	3217	0
project	Project	PRProject.ProjectNr	char	20	Yes	8657	
ReferenceNr1	Reference		varchar	20	Yes	5961	
ReferenceNr2	Extra reference		varchar	20	Yes	12576	
res_id	Resource		int		No	12	0
RunNumber	Run number		smallint		No	11110	1
StateCode	State	AddressStates.StateCode	char	3	Yes	31215	
status	Status	DDTesst	char	1	Yes	4332	
syscreated	syscreated		datetime		No	0	
syscreator	syscreator		int		No	0	0
sysguid	sysguid		uniqueidentifier		No	0	
sysmodified	sysmodified		datetime		No	0	
sysmodifier	sysmodifier		int		No	0	0
timestamp	timestamp		timestamp		No		
unit	Unit	DDTests	char	1	Yes	2976	
VoidDate	Void Date		Datetime	8	Yes	13334	
yourreference	Your reference		char	30	Yes	1506	

52.48 HrComponentItemLinks

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Assortment	Assortment	ItemsAssortment.Code	varchar	30	Yes	222	
comp_code	Component	hrcomponents.comp_code	char	8	No	4138	
Division	Division		smallint	2	Yes	64	
ID	ID		int		No		
ItemCode	Item code	Items.ItemCode	varchar	30	Yes	1102	
Ledger_account	G/L	grtbk.reknr	varchar	9	Yes	74	
PayrollComponent	Component		varchar	8	Yes	9175	
RelCode	Relation code	hrfree.reckey	varchar	10	Yes	4138	
syscreated	syscreated		datetime		No		
syscreator	syscreator	humres.res_id	int		No		0
sysguid	sysguid		uniqueidentifier		No		
sysmodified	sysmodified		datetime		No		
sysmodifier	sysmodifier	humres.res_id	int		No		0
timestamp	timestamp		timestamp		No		
Type	Type	DDTests	char	1	No	5172	A

52.49 HrPayroll

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
component_group	Component group	hrfree.reckey	char	10	Yes	13781	
contract	Contract		smallint		No	10421	0
Country	Country	land.landcode	char	3	Yes	2356	
Country15Char1			char	15	Yes		
Country15Char2			char	15	Yes		
Country15Char3			char	15	Yes		
Country30Varchar1			varchar	30	Yes		
Country30Varchar2			varchar	30	Yes		
Country30Varchar3			varchar	30	Yes		
Country70Varchar1			varchar	70	Yes		
Country70Varchar2			varchar	70	Yes		
Country70Varchar3			varchar	70	Yes		

HrPayroll

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Country8Char1			char	8	Yes		
Country8Char2			char	8	Yes		
Country8Char3			char	8	Yes		
Country8Char4			char	8	Yes		
Country8Char5			char	8	Yes		
Country8Char6			char	8	Yes		
CountryDate1			datetime		Yes		
CountryDate10			datetime		Yes		
CountryDate11			datetime		Yes		
CountryDate12			datetime		Yes		
CountryDate13			datetime		Yes		
CountryDate14			datetime		Yes		
CountryDate15			datetime		Yes		
CountryDate16			datetime		Yes		
CountryDate17			datetime		Yes		
CountryDate18			datetime		Yes		
CountryDate19			datetime		Yes		
CountryDate2			datetime		Yes		
CountryDate20			datetime		Yes		
CountryDate21			datetime		Yes		
CountryDate22			datetime		Yes		
CountryDate3			datetime		Yes		
CountryDate4			datetime		Yes		
CountryDate5			datetime		Yes		
CountryDate6			datetime		Yes		
CountryDate7			datetime		Yes		
CountryDate8			datetime		Yes		
CountryDate9			datetime		Yes		
CountryFloat1			float		No		0.0
CountryFloat10			float		No		0.0
CountryFloat11			float		No		0.0
CountryFloat12			float		No		0.0

HrPayroll

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CountryFloat13			float		No		0.0
CountryFloat14			float		No		0.0
CountryFloat15			float		No		0.0
CountryFloat16			float		No		0.0
CountryFloat17			float		No		0.0
CountryFloat18			float		No		0.0
CountryFloat19			float		No		0.0
CountryFloat2			float		No		0.0
CountryFloat20			float		No		0.0
CountryFloat21			float		No		0.0
CountryFloat22			float		No		0.0
CountryFloat23			float		No		0.0
CountryFloat24			float		No		0.0
CountryFloat25			float		No		0.0
CountryFloat26			float		No		0.0
CountryFloat27			float		No		0.0
CountryFloat28			float		No		0.0
CountryFloat29			float		No		0.0
CountryFloat3			float		No		0.0
CountryFloat30			float		No		0.0
CountryFloat4			float		No		0.0
CountryFloat5			float		No		0.0
CountryFloat6			float		No		0.0
CountryFloat7			float		No		0.0
CountryFloat8			float		No		0.0
CountryFloat9			float		No		0.0
CountryInt1			int		Yes		
CountryInt2			int		Yes		
CountryInt3			int		Yes		
CountryNoYes1			tinyint		No		0
CountryNoYes10			tinyint		No		0
CountryNoYes11			tinyint		No		0

HrPayroll

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CountryNoYes12			tinyint		No		0
CountryNoYes13			tinyint		No		0
CountryNoYes14			tinyint		No		0
CountryNoYes15			tinyint		No		0
CountryNoYes16			tinyint		No		0
CountryNoYes17			tinyint		No		0
CountryNoYes18			tinyint		No		0
CountryNoYes19			tinyint		No		0
CountryNoYes2			tinyint		No		0
CountryNoYes20			tinyint		No		0
CountryNoYes3			tinyint		No		0
CountryNoYes4			tinyint		No		0
CountryNoYes5			tinyint		No		0
CountryNoYes6			tinyint		No		0
CountryNoYes7			tinyint		No		0
CountryNoYes8			tinyint		No		0
CountryNoYes9			tinyint		No		0
CountrySmallint1			smallint		Yes		
CountrySmallint10			smallint		Yes		
CountrySmallint11			smallint		Yes		
CountrySmallint12			smallint		Yes		
CountrySmallint13			smallint		Yes		
CountrySmallint14			smallint		Yes		
CountrySmallint15			smallint		Yes		
CountrySmallint16			smallint		Yes		
CountrySmallint17			smallint		Yes		
CountrySmallint18			smallint		Yes		
CountrySmallint19			smallint		Yes		
CountrySmallint2			smallint		Yes		
CountrySmallint20			smallint		Yes		
CountrySmallint3			smallint		Yes		
CountrySmallint4			smallint		Yes		

HrPayroll

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CountrySmallint5			smallint		Yes		
CountrySmallint6			smallint		Yes		
CountrySmallint7			smallint		Yes		
CountrySmallint8			smallint		Yes		
CountrySmallint9			smallint		Yes		
CountryTest1			char	1	Yes		
CountryTest10			char	1	Yes		
CountryTest11			char	1	Yes		
CountryTest12			char	1	Yes		
CountryTest13			char	1	Yes		
CountryTest14			char	1	Yes		
CountryTest15			char	1	Yes		
CountryTest16			char	1	Yes		
CountryTest17			char	1	Yes		
CountryTest18			char	1	Yes		
CountryTest19			char	1	Yes		
CountryTest2			char	1	Yes		
CountryTest20			char	1	Yes		
CountryTest21			char	1	Yes		
CountryTest22			char	1	Yes		
CountryTest23			char	1	Yes		
CountryTest24			char	1	Yes		
CountryTest25			char	1	Yes		
CountryTest26			char	1	Yes		
CountryTest27			char	1	Yes		
CountryTest28			char	1	Yes		
CountryTest29			char	1	Yes		
CountryTest3			char	1	Yes		
CountryTest30			char	1	Yes		
CountryTest31			char	1	Yes		
CountryTest32			char	1	Yes		
CountryTest33			char	1	Yes		

HrPayroll

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CountryTest34			char	1	Yes		
CountryTest35			char	1	Yes		
CountryTest36			char	1	Yes		
CountryTest37			char	1	Yes		
CountryTest38			char	1	Yes		
CountryTest39			char	1	Yes		
CountryTest4			char	1	Yes		
CountryTest40			char	1	Yes		
CountryTest5			char	1	Yes		
CountryTest6			char	1	Yes		
CountryTest7			char	1	Yes		
CountryTest8			char	1	Yes		
CountryTest9			char	1	Yes		
description	Description		varchar	50	Yes	4243	
Division	Division		smallint	2	Yes	64	
DocAttachmentID	Attachment	BacoDiscussions.ID	uniqueidentifier		Yes	31617	
enddate	End date		datetime		Yes	22526	
ID	ID		int		No		
job_title	Job title	hrjbtl.job_title	char	12	Yes	29537	
payment_period	Payment period		char	1	Yes	24946	M
PayrollYear	Payroll year		smallint		Yes	1321	
period	Period		smallint		No	5771	
res_id	Resource	humres.res_id	int		No	12	0
startdate	Start date		datetime		No	3392	
syscreated	Syscreated		datetime		No		
syscreator	Syscreator	humres.res_id	int		No		0
sysguid	Sysguid		uniqueidentifier		No		
sysmodified	Sysmodified		datetime		No		
sysmodifier	Sysmodifier	humres.res_id	int		No		0
timestamp	Timestamp		timestamp		No		
type	Type		char	1	No	3801	N

52.50 HRPayrollDeclarations

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Country			char	3	No		
CountryDate1			datetime		Yes		
CountryDate10			datetime		Yes		
CountryDate2			datetime		Yes		
CountryDate3			datetime		Yes		
CountryDate4			datetime		Yes		
CountryDate5			datetime		Yes		
CountryDate6			datetime		Yes		
CountryDate7			datetime		Yes		
CountryDate8			datetime		Yes		
CountryDate9			datetime		Yes		
CountryFloat1			float		No		(0.0)
CountryFloat10			float		No		(0.0)
CountryFloat11			float		No		(0.0)
CountryFloat12			float		No		(0.0)
CountryFloat13			float		No		(0.0)
CountryFloat14			float		No		(0.0)
CountryFloat15			float		No		(0.0)
CountryFloat16			float		No		(0.0)
CountryFloat17			float		No		(0.0)
CountryFloat18			float		No		(0.0)
CountryFloat19			float		No		(0.0)
CountryFloat2			float		No		(0.0)
CountryFloat20			float		No		(0.0)
CountryFloat21			float		No		(0.0)
CountryFloat22			float		No		(0.0)
CountryFloat23			float		No		(0.0)
CountryFloat24			float		No		(0.0)
CountryFloat25			float		No		(0.0)
CountryFloat26			float		No		(0.0)
CountryFloat27			float		No		(0.0)

HRPayrollDeclarations

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CountryFloat28			float		No		(0.0)
CountryFloat29			float		No		(0.0)
CountryFloat3			float		No		(0.0)
CountryFloat30			float		No		(0.0)
CountryFloat31			float		No		(0.0)
CountryFloat32			float		No		(0.0)
CountryFloat33			float		No		(0.0)
CountryFloat34			float		No		(0.0)
CountryFloat35			float		No		(0.0)
CountryFloat36			float		No		(0.0)
CountryFloat37			float		No		(0.0)
CountryFloat38			float		No		(0.0)
CountryFloat39			float		No		(0.0)
CountryFloat4			float		No		(0.0)
CountryFloat40			float		No		(0.0)
CountryFloat41			float		No		(0.0)
CountryFloat42			float		No		(0.0)
CountryFloat43			float		No		(0.0)
CountryFloat44			float		No		(0.0)
CountryFloat45			float		No		(0.0)
CountryFloat46			float		No		(0.0)
CountryFloat47			float		No		(0.0)
CountryFloat48			float		No		(0.0)
CountryFloat49			float		No		(0.0)
CountryFloat5			float		No		(0.0)
CountryFloat50			float		No		(0.0)
CountryFloat51			float		No		(0.0)
CountryFloat52			float		No		(0.0)
CountryFloat53			float		No		(0.0)
CountryFloat54			float		No		(0.0)
CountryFloat55			float		No		(0.0)
CountryFloat56			float		No		(0.0)

HRPayrollDeclarations

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CountryFloat57			float		No		(0.0)
CountryFloat58			float		No		(0.0)
CountryFloat59			float		No		(0.0)
CountryFloat6			float		No		(0.0)
CountryFloat60			float		No		(0.0)
CountryFloat7			float		No		(0.0)
CountryFloat8			float		No		(0.0)
CountryFloat9			float		No		(0.0)
CountryInt1			int		Yes		
CountryInt10			int		Yes		
CountryInt2			int		Yes		
CountryInt3			int		Yes		
CountryInt4			int		Yes		
CountryInt5			int		Yes		
CountryInt6			int		Yes		
CountryInt7			int		Yes		
CountryInt8			int		Yes		
CountryInt9			int		Yes		
CountryNoYes1			tinyint		No		(0)
CountryNoYes10			tinyint		No		(0)
CountryNoYes11			tinyint		No		(0)
CountryNoYes12			tinyint		No		(0)
CountryNoYes13			tinyint		No		(0)
CountryNoYes14			tinyint		No		(0)
CountryNoYes15			tinyint		No		(0)
CountryNoYes16			tinyint		No		(0)
CountryNoYes17			tinyint		No		(0)
CountryNoYes18			tinyint		No		(0)
CountryNoYes19			tinyint		No		(0)
CountryNoYes2			tinyint		No		(0)
CountryNoYes20			tinyint		No		(0)
CountryNoYes3			tinyint		No		(0)

HRPayrollDeclarations

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CountryNoYes4			tinyint		No		(0)
CountryNoYes5			tinyint		No		(0)
CountryNoYes6			tinyint		No		(0)
CountryNoYes7			tinyint		No		(0)
CountryNoYes8			tinyint		No		(0)
CountryNoYes9			tinyint		No		(0)
CountryTest1			char	1	Yes		
CountryTest10			char	1	Yes		
CountryTest11			char	1	Yes		
CountryTest12			char	1	Yes		
CountryTest13			char	1	Yes		
CountryTest14			char	1	Yes		
CountryTest15			char	1	Yes		
CountryTest16			char	1	Yes		
CountryTest17			char	1	Yes		
CountryTest18			char	1	Yes		
CountryTest19			char	1	Yes		
CountryTest2			char	1	Yes		
CountryTest20			char	1	Yes		
CountryTest3			char	1	Yes		
CountryTest4			char	1	Yes		
CountryTest5			char	1	Yes		
CountryTest6			char	1	Yes		
CountryTest7			char	1	Yes		
CountryTest8			char	1	Yes		
CountryTest9			char	1	Yes		
CountryVarchar1			varchar	200	Yes		
CountryVarchar10			varchar	200	Yes		
CountryVarchar11			varchar	200	Yes		
CountryVarchar12			varchar	200	Yes		
CountryVarchar13			varchar	200	Yes		
CountryVarchar14			varchar	200	Yes		

HRPayrollDeclarations

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
CountryVarchar15			varchar	200	Yes		
CountryVarchar16			varchar	200	Yes		
CountryVarchar17			varchar	200	Yes		
CountryVarchar18			varchar	200	Yes		
CountryVarchar19			varchar	200	Yes		
CountryVarchar2			varchar	200	Yes		
CountryVarchar20			varchar	200	Yes		
CountryVarchar21			varchar	200	Yes		
CountryVarchar22			varchar	200	Yes		
CountryVarchar23			varchar	200	Yes		
CountryVarchar24			varchar	200	Yes		
CountryVarchar25			varchar	200	Yes		
CountryVarchar26			varchar	200	Yes		
CountryVarchar27			varchar	200	Yes		
CountryVarchar28			varchar	200	Yes		
CountryVarchar29			varchar	200	Yes		
CountryVarchar3			varchar	200	Yes		
CountryVarchar30			varchar	200	Yes		
CountryVarchar4			varchar	200	Yes		
CountryVarchar5			varchar	200	Yes		
CountryVarchar6			varchar	200	Yes		
CountryVarchar7			varchar	200	Yes		
CountryVarchar8			varchar	200	Yes		
CountryVarchar9			varchar	200	Yes		
Division			smallint		Yes		
DocAttachmentID			uniqueidentifier		Yes		
Frequency			char	1	Yes		
ID			int		No		
PayrollYear			int		No		
Period			int		No		
ProcessDate			datetime		Yes		
Reference			varchar	200	Yes		

HRPayrollDeclarations

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
ReferenceNumber			varchar	200	Yes		
res_id			int		Yes		
Sequence			int		No		(0)
Status			char	1	Yes		
syscreated			datetime		No		
syscreator			int		No		(0)
sysguid			uniqueidentifier		No		
sysmodified			datetime		No		
sysmodifier			int		No		(0)
timestamp			timestamp		No		
Type			varchar	200	No		
Version			varchar	200	No		



Chapter 53 | Sample SQL queries

53. Sample SQL queries

53.1 Humres

1. Query to retrieve the list of active employees with the resource ID, full name and costcenter:

```
SELECT Res_ID, FullName, CostCenter
FROM Humres
WHERE (Emp_Type IN ('E','C','S','T'))
AND (Emp_stat IN ('A'))
AND Humres.Res_ID > 0
ORDER BY Humres.Res_ID
```

2. Query to retrieve the list of active employees with the resource ID, full name and job title ordered by job title:

```
SELECT Res_ID, FullName, CostCenter
FROM Humres
LEFT OUTER JOIN Hrbjtl ON Hrbjtl.Job_Title = Humres.Job_Title
WHERE (Emp_Type IN ('E','C','S','T'))
AND (Emp_stat IN ('A'))
AND Humres.Res_ID > 0
ORDER BY Hrbjtl.Job_Title, Humres.Res_ID
```

3. Query to retrieve the employees that will become inactive ordered by resource ID:

```
SELECT Res_ID, FullName, Ldatuitdienst
FROM Humres
LEFT OUTER JOIN Hrbjtl ON Hrbjtl.Job_Title = Humres.Job_Title
WHERE (Emp_Type IN ('E','C','S','T'))
AND (Emp_stat IN ('A'))
AND Humres.Res_ID > 0
AND Ldatuitdienst is not null
AND Ldatuitdienst > getdate()
ORDER BY Humres.Res_ID
```

53.2 HrFree

1. Query to retrieve all job groups ordered by the job group description:

```
SELECT RecKey, Descr60
FROM HrFree
WHERE FileType = 'JG'
ORDER BY Descr60
```

2. Query to retrieve all job activities ordered by job group:

```
SELECT RecKey, Descr60, JobGroup
FROM HrFree
WHERE FileType = 'VG'
ORDER BY JobGroup, Descr60
```

3. Query to retrieve the job activities where competencies 1 and 6 are marked ordered by the description of the job activity:

```
SELECT RecKey, Descr60
FROM HrFree
WHERE Competency1 = '1' AND Competency6 = '1'
    AND FileType = 'VG'
ORDER BY Descr60
```

53.3 HRCompanyPeriods

1. Query to retrieve closed periods of year '2006' for company '001'.

```
SELECT HRCompanyPeriods.FinPeriod, HRCompanyPeriods.FinYear
FROM HRCompanyPeriods
WHERE HRCompanyPeriods.FinYear = '2006'
    AND HRCompanyPeriods.CompanyCode = '001'
ORDER BY HRCompanyPeriods.FinPeriod DESC
```

53.4 Hrjbt1

1. Query to retrieve the number of active employees per job title:

```
SELECT Hrjbt1.Job_Title, Hrjbt1.Descr50, Count(*)
FROM Hrjbt1
INNER JOIN Humres on Humres.Job_Title = Hrjbt1.Job_Title
WHERE Humres.Emp_Type in ('E','C','S','T')
AND Humres.Emp_stat in ('A')
AND Humres.Res_ID > 0
GROUP BY Hrjbt1.Job_Title, Hrjbt1.Descr50
```

2. Query to retrieve the job titles that have a default security level equal to or higher than level '15':

```
SELECT Job_Title, Descr50, Job_Level
FROM Hrjbt1
WHERE Job_Level > '15'
ORDER BY Job_Level
```

53.5 HRMainFint

1. Query to retrieve all main financial component type.

```
SELECT * FROM HrMainFint
```

53.6 Hrfin

1. List all the component linked to resource with ID '10'.

```
SELECT * FROM Hrfin WHERE res_id = '10'
```

53.7 Hrfint

1. List of financial component of type earnings.

```
SELECT * FROM Hrfint WHERE fingroup = 'A'
```

53.8 *AbsenceEntitlements*

1. Query to retrieve all entitlements entitled to each resource.

```
SELECT AbsenceEntitlements.EmpID, AbsenceEntitlements.AbsenceType, AbsenceTypes.Description, COUNT  
(AbsenceEntitlements.Empid)  
FROM AbsenceEntitlements  
LEFT JOIN AbsenceTypes on AbsenceEntitlements.AbsenceType = AbsenceTypes.ID  
GROUP BY AbsenceEntitlements.Empid, AbsenceEntitlements.AbsenceType, AbsenceTypes.Description
```

53.9 *PublicHolidays*

1. Query to retrieve country specific public holidays and ordered by date.

```
SELECT Date, Country, Description, MainLoc  
FROM PublicHolidays  
WHERE Country IS NOT NULL  
ORDER BY Date
```

2. Query to retrieve location specific public holidays and ordered by date.

```
SELECT Date, Country, Description, MainLoc  
FROM PublicHolidays  
WHERE MainLoc IS NOT NULL  
ORDER BY Date
```

3. Query to retrieve division specific public holidays and ordered by date.

```
SELECT Date, Country, Description, MainLoc  
FROM PublicHolidays  
WHERE Division IS NOT NULL  
ORDER BY Date
```

53.10 WorkSchedules

1. Query to retrieve the resources, for whom a resource-specific work schedule exists.

```
SELECT EmpID, WeekDay, StartTime, EndTime
FROM WorkSchedules
WHERE EmpID IS NOT NULL
```

2. Query to retrieve the division work schedule(s).

```
SELECT EmpID, CompanyCode, WeekDay, StartTime, EndTime
FROM WorkSchedules
WHERE CompanyCode IS NOT NULL
```

3. Query to retrieve the default work schedule.

```
SELECT EmpID, CompanyCode, WeekDay, StartTime, EndTime
FROM WorkSchedules
WHERE CompanyCode IS NOT NULL AND EmpID IS NOT NULL
```

53.11 Pwrole

1. Display all security roles that are visible.

```
Select role_name, role_id, descr64 from Pwrole where Visible = '1'
```

53.12 Pwrprm

1. Display the role's right that belongs to the HR role (Role ID 11).

```
SELECT fnc_id, right_id, ID FROM pwrprm WHERE role_id = 11
```

53.13 Pwruc

1. List the roles assigned to a user with human resource ID equals to 1.

```
Select * from pwruc where res_id = 1
```

53.14 HRRoles

1. Query to retrieve roles defined for resource with ID '198572'.

```
SELECT HRRoles.RoleID, HRRoleDefs.Description  
FROM HRRoles INNER JOIN HRRoleDefs ON HRRoles.RoleID = HRRoleDefs.ID  
WHERE HRRoles.EmpID = '198572'  
ORDER BY HRRoles.RoleID
```

53.15 HRRoleDefs

1. Query to retrieve all role definitions.

```
SELECT HRRoleDefs.Description  
FROM HRRoleDefs
```

53.16 HRRoleLevels

1. Query to retrieve all levels.

```
SELECT HRRoleLevels.Description  
FROM HRRoleLevels
```

53.17 Hrsk

1. Query to retrieve skills defined for resource with ID '196523'.

```
SELECT hrsk.res_id, hrsk.skill_type  
FROM hrsk  
WHERE hrsk.res_id = '196523'  
ORDER BY hrsk.skill_type
```

53.18 ResourceStatus

1. Query to retrieve the code and description of the resource status.

```
SELECT ResourceStatus.Status, ResourceStatus.Description
FROM ResourceStatus
```

2. Query to retrieve the description and term ID of status 'A'.

```
SELECT ResourceStatus.Description, ResourceStatus.TermID
FROM ResourceStatus
WHERE ResourceStatus.Status = 'A'
```

53.19 ResourceTypes

1. Query to retrieve the code and description of the resource types.

```
SELECT ResourceTypes.Type, ResourceTypes.Description
FROM ResourceTypes
```

2. Query to retrieve the description and term ID of type 'A'.

```
SELECT ResourceTypes.Description, ResourceTypes.TermID
FROM ResourceTypes
WHERE ResourceTypes.Type = 'A'
```

53.20 StockOptions

1. Query to retrieve the options purchased by resource with ID '196572'.

```
SELECT StockOptions.TransactionDate, StockOptions.TransactionType, StockOptions.Qty, StockOptions.currency,
StockOptions.ExercisePrice, StockOptions.VestingDate, StockOptions.PremiumAmount, StockOptions.EndDate
FROM StockOptions
WHERE StockOptions.EmpID= '196572'
AND StockOptions.EmpID > 0
ORDER BY StockOptions.TransactionDate
```

53.21 HREffectiveDateDataLog

1. Select all the HR changes for resource with ID number 10, indicating the effective date, new value and old value of the resource information changes.

```
Select EffectiveDate, NewValue, OldValue from HrEffectiveDateDataLog
Where Res_id = 10
```

53.22 HRHumresLinks

1. Select all resource link information for vacancy with ID number 19.

```
Select * from HRHumresLinks
where Res_ID = 19
```

53.23 Hrwdoc

1. Show the entire quotation Word merge template.

```
Select * from Hrwdoc where MergeType = 'X' and Type = 'C'
```

53.24 HRCompetencies

1. Query to retrieve the list of competency.

```
SELECT HRCompetencies.ID, HRCompetencies.Description
FROM HRCompetencies
ORDER BY HRCompetencies.ID
```

53.25 HRComptencyRatings

1. Query to retrieve the competency profile of resource ID '198572'.

```
SELECT HrCompetencyRatings.ID, HrCompetencyRatings.EmpID, HrCompetencyRatings.ReferenceDate,
HrCompetencyRatings.CompetencyID, HrCompetencyRatings.Rating, HRCompetencies.Description
FROM HrCompetencyRatings
INNER JOIN HRCompetencies on HrCompetencyRatings.CompetencyID = HRCompetencies.ID
WHERE HrCompetencyRatings.Empid = '198572'
```

53.26 HRMCompetenceGroups

1. Show all competency group with type competency and has 3 levels of sub-competency.

```
SELECT * FROM HRMCompetenceGroups WHERE Type = 'C' AND Levels = 3
```

53.27 HRMCompetenceProfiles

1. Display all competence profile with open status and from the 'Finance & Administration' job group.

```
SELECT * FROM HRMCompetenceProfiles WHERE Status = 'O' AND JobGroup = 'FA'
```

53.28 HRMCompetences

1. List all level 1 competences that are linked to competences of the same level.

```
SELECT * FROM HRMCompetences WHERE Level = '1' AND LinkedToId IS NOT NULL
```

53.29 HRMCompetenceLinks

1. Display all competence links that uses the selection value field type.

```
SELECT * FROM HRMCompetenceLinks WHERE SelectionValue IS NOT NULL
```

53.30 HRMSelectionValues

1. Display all the selection/test value with is the first in display sequence and has the display value 'A'.

```
SELECT * FROM HRMSelectionValues WHERE DisplayValue = 'A' AND SequenceNumber = '1'
```

53.31 HRFormLayouts

1. Display the read only vacancy form layout.

```
SELECT * FROM HRFormLayouts WHERE Type = 'RV' AND Description = 'Vacancy'
```

53.32 HRFormElements

1. Display all form elements where resource with security level equal or more than 10 can view and edit.

```
SELECT * FROM HRFormElements WHERE EditSecurityLevel = '10' AND ViewSecurityLevel = '10'
```

53.33 HRProcessLogs

1. Display all the records in process logs where the process request ID is 1.

```
SELECT * FROM HRProcessLogs WHERE ProcessRequestsID= '1'
```

53.34 HRProcessTypes

1. Query to display all HR process with request type as process type.

```
SELECT * FROM HRProcessTypes WHERE ProcessType = '1'
```

53.35 HRProcessRequests

1. Query to display the process request that has a previous request.

```
SELECT * FROM HRProcessRequests WHERE UseDate = '3' AND UseRequest = '2'
```

53.36 HRFreeFields

1. Query to retrieve all free fields defined for company with division code '805'.

```
SELECT * FROM HRFreeFields WHERE CompanyNr= '805'
```

53.37 HREmployeePeriods

1. Query to display the employee period generated for financial year 2006.

```
SELECT * FROM HREmployeePeriods WHERE FinYear= '2006'
```

53.38 HRErrorLog

1. Query to retrieve only error messages from HRMail background job.

```
SELECT * FROM HRErrorLog WHERE AppName = 'MAILMERGE' AND  
TransType = '1'
```

53.39 HRPasswds

1. Query to retrieve all the pre-defined words used to generate user password.

```
SELECT * FROM HRPasswds
```

53.40 Hrloc

1. Query to retrieve all location under the country, Netherland (NL)

```
SELECT * FROM Hrloc WHERE country = 'NL'
```

53.41 CompanyClassNames

1. Query to retrieve the organization groups.

```
SELECT CompanyClassNames.ClassID, CompanyClassNames.Description  
FROM CompanyClassNames
```

53.42 CompanyClasses

1. Query to retrieve the subgroups of group 1.

```
SELECT CompanyClasses.CompanyClassCode, CompanyClasses.Description
FROM CompanyClasses
WHERE CompanyClasses.ClassID = 1
```

53.43 Notes

1. Query to retrieve notes on ID '1'.

```
SELECT Notes.ID, Notes.Note
FROM Notes
WHERE Notes.ID = '1'
```

53.44 DeletionLogs

1. Query to retrieve key values of table 'hrpayroll' and division '001'.

```
SELECT DeletionLogs.KeyInt1 'res_id', DeletionLogs.KeyInt4 'contract', DeletionLogs.KeyDate1 'startdate',
DeletionLogs.KeyString1 'type'
FROM DeletionLogs
WHERE DeletionLogs.TableName = 'hrpayroll'
AND DeletionLogs.CompanyCode = '001'
```

2. Query to retrieve key values of table 'hrcomp_resource' and division '001'.

```
SELECT DeletionLogs.KeyInt1 'res_id', DeletionLogs.KeyString1 'comp_code', DeletionLogs.KeyDate1 'startdate',
DeletionLogs.KeyGuid1 'ComponentGuid'
FROM DeletionLogs
WHERE DeletionLogs.TableName = 'hrcomp_resource'
AND DeletionLogs.CompanyCode = '001'
```

53.45 HrComponents

1. Query to retrieve the list of Dutch payroll components that are active, with a default amount or percentage (if applicable):

```
SELECT Comp_Code, Descr50_0, StartDate, Comp_Type, Unit, Default_Amount,
       Default_Percentage
FROM HrComponents
WHERE Parent_Code IS NULL
AND Country = 'NL'
AND Comp_Code NOT LIKE '~%'
AND StartDate < getdate()
AND EndDate IS NULL
AND Comp_Type in ('F','D','R','B','T')
```

2. Query to retrieve the list of commission method components ordered by country:

```
SELECT Country, Comp_Code, Descr50_0
FROM HrComponents
WHERE Comp_Type = 'P'
ORDER BY Country
```

3. Query to retrieve the description and type of component "SCALE" and all wage scale lines of that component that has the scale entity set to "Job group - Job level":

```
SELECT HrComponents.Comp_Code, HrComponents.Descr50_0,
       HrComponents.StartDate, HrComponents.EndDate,
       HrComponents.Comp_Type, HrComponents.Comp_Sub_Type,
       HrComponents.JobActivity
FROM HrComponents
WHERE HrComponents.Comp_Code = 'SCALE' AND HrComponents.Country='NL'
UNION
SELECT HrComponents.Parent_Code, HrComponents.Comp_Code, HrComponents.StartDate, HrComponents.EndDate,
       HrComponents.Default_Amount, HrComponents.JobActivity, HrFree.Descr60, HrComponents.Scale
FROM HrComponents
JOIN HrFree ON HrFree.FileType = 'JG' and HrFree.Reckey = HrComponents.JobActivity
WHERE HrComponents.Parent_Code IS NOT NULL
       AND HrComponents.Country='NL'
       AND HrComponents.Parent_Code = 'SCALE'
```

53.46 HrComp_Resource

1. Query to retrieve all components that are linked to resource 1234:

```
SELECT HrComp_Resource.Comp_Code, HrComponents.Descr50_0,  
HrComp_Resource.Deviating_Descr50, HrComp_Resource.Amount,  
HrComp_Resource.Percentage  
FROM HrComp_Resource  
JOIN HrComponents ON HrComponents.Comp_Code =  
HrComp_Resource.Comp_Code  
WHERE HrComp_Resource.Res_ID = '1234'
```

2. Query to retrieve all components that will be used in a payroll calculation if generated today, for resource 1234:

```
SELECT HrComp_Resource.Comp_Code, HrComponents.Descr50_0,  
HrComp_Resource.Deviating_Descr50, HrComp_Resource.Amount,  
HrComp_Resource.Percentage, HrComp_Resource.StartDate,  
HrComp_Resource.EndDate  
FROM HrComp_Resource  
JOIN HrComponents ON HrComponents.Comp_Code =  
HrComp_Resource.Comp_Code  
WHERE HrComp_Resource.Res_ID = '1234'  
AND HrComp_Resource.StartDate < getdate()  
AND HrComponents.Comp_Type IN ('F','D','R','B','T')  
AND (HrComp_Resource.EndDate IS NULL or HrComp_Resource.EndDate > getdate())
```

3. Query to retrieve all resources that have component 'EXTRA' linked:

```
SELECT DISTINCT(HrComp_Resource.Res_ID), Humres.FullName  
FROM HrComp_Resource  
JOIN Humres ON Humres.Res_ID = HrComp_Resource.Res_ID  
WHERE HrComp_Resource.Comp_Code = 'EXTRA'
```

53.47 HrComp_Trans

1. Query to retrieve the list of employees for which a payroll calculation has been generated for year 2005 period 7:

```
SELECT DISTINCT(HrComp_Trans.Res_ID), Humres.FullName, HrComp_Trans.Status
FROM HrComp_Trans
INNER JOIN Humres ON Humres.Res_ID = HrComp_Trans.Res_ID
WHERE HrComp_Trans.PayrollYear = '2005'
AND HrComp_Trans.Period = '7'
```

2. Query to retrieve all resources for which the payroll calculation of year 2005 period 7 has to be processed:

```
SELECT DISTINCT(HrComp_Trans.Res_ID), Humres.FullName
FROM HrComp_Trans
INNER JOIN Humres ON Humres.Res_ID = HrComp_Trans.Res_ID
WHERE HrComp_Trans.Status in ('A','C')
AND HrComp_Trans.PayrollYear = '2005'
AND HrComp_Trans.Period = '7'
```

3. Query to retrieve the amount that will be paid as a result of the payroll calculation of year 2005 period 7 for resource 1234:

```
SELECT HrComp_Trans.Res_ID, Humres.FullName, HrComp_Trans.Comp_Code,
HrComponents.Descr50_0, HrComp_Trans.Amount_To_Be_Paid
FROM HrComp_Trans
INNER JOIN Humres ON Humres.Res_ID = HrComp_Trans.Res_ID
INNER JOIN HrComponents ON HrComponents.Comp_Code =
HrComp_Trans.Comp_code
WHERE HrComp_Trans.Status = 'C'
AND HrComp_Trans.PayrollYear = '2005'
AND HrComp_Trans.Period = '7'
AND HrComp_Trans.Res_ID= '2204'
AND HrComp_Trans.Comp_Sub_Type = '4000'
```

53.48 HrComponentItemLinks

1. Query to retrieve all components that have activities linked, with the number of linked activities:

```
SELECT HrComponentItemLinks.Comp_Code, HrComponents.Descr50_0, Count(*)
FROM HrComponentItemLinks
INNER JOIN HrComponents ON HrComponents.Comp_Code =
HrComponentItemLinks.Comp_Code
INNER JOIN Items ON Items.ItemCode = HrComponentItemLinks.ItemCode
WHERE HrComponentItemLinks.Type = 'A'
GROUP BY HrComponentItemLinks.Comp_Code, HrComponents.Descr50_0
ORDER BY HrComponentItemLinks.Comp_Code
```

2. Query to retrieve all hour items that will be used to calculate component 'SALARIS' during the payroll calculation:

```
SELECT HrComponentItemLinks.Comp_Code, HrComponents.Descr50_0,
      HrComponentItemLinks.ItemCode, Items.Description
FROM HrComponentItemLinks
INNER JOIN HrComponents ON HrComponents.Comp_Code =
HrComponentItemLinks.Comp_Code
INNER JOIN Items ON Items.ItemCode = HrComponentItemLinks.ItemCode
WHERE HrComponentItemLinks.Comp_Code = 'SALARIS'
```

3. Query to retrieve the list of components that are linked to a component group, ordered by component group:

```
SELECT HrComponentItemLinks.RelCode, HrFree.Descr60,
      HrComponentItemLinks.Comp_Code, HrComponents.Descr50_0
FROM HrComponentItemLinks
INNER JOIN HrComponents ON HrComponents.Comp_Code =
HrComponentItemLinks.Comp_Code
INNER JOIN HrFree ON HrFree.RecKey = HrComponentItemLinks.RelCode AND
HrFree.FileType = 'CG'
WHERE HrComponentItemLinks.Type = 'G'
ORDER BY HrComponentItemLinks.RelCode, HrComponentItemLinks.Comp_Code
```

53.49 HrPayroll

1. Query to retrieve the payment periods that are used in year 2005 period 7:

```
SELECT NLHrPayroll.Payment_Period, Count(*)
FROM NLHrPayroll
WHERE NLHrPayroll.PayrollYear = '2005'
AND NLHrPayroll.Period = '7'
GROUP BY NLHrPayroll.Payment_Period
```

2. Query to retrieve all resources that have a company car in a dutch legislation:

```
SELECT DISTINCT(NLHrPayroll.Res_ID), Humres.FullName
FROM NLHrPayroll
INNER JOIN Humres ON Humres.Res_ID = NLHrPayroll.Res_ID
WHERE NLHrPayroll.Ydec_comp_Car = '1'
```

3. Query to retrieve all resources that are insured for the ZFW in a dutch legislation:

```
SELECT DISTINCT(NLHrPayroll.Res_ID), Humres.FullName
FROM NLHrPayroll
INNER JOIN Humres ON Humres.Res_ID = NLHrPayroll.Res_ID
WHERE NLHrPayroll.Soc_ZFW_Type = 'N'
```

53.50 HRPayrollDeclarations

1. Query to retrieve the Loonaangifte returns record created on 2008 for Netherlands legislation.

```
SELECT hrpayrolldeclarations.ReferenceNumber AS IncomeTaxNumber2, hrpayrolldeclarations.CountryVarchar12 AS Nmlp,
hrpayrolldeclarations.period AS Period, hrpayrolldeclarations.Frequency AS Frequency, hrpayrolldeclarations.sequence AS
Sequence, hrpayrolldeclarations.CountryTest1 AS Type, hrpayrolldeclarations.PayrollYear AS PayrollYear,
MAX(hrpayrolldeclarations.reference) AS Reference, MAX(hrpayrolldeclarations.ProcessDate) AS Created,
SUM(hrpayrolldeclarations.CountryFloat2) AS LnSv, SUM(hrpayrolldeclarations.CountryFloat1) AS LnLbPh,
SUM(hrpayrolldeclarations.CountryFloat4) AS LnPrWAOAof, SUM(hrpayrolldeclarations.CountryFloat6) AS LnPrWAOAok,
SUM(hrpayrolldeclarations.CountryFloat8) AS LnPrAwf, SUM(hrpayrolldeclarations.CountryFloat10) AS LnPrWgf,
SUM(hrpayrolldeclarations.CountryFloat12) AS LnPrUfo, SUM(hrpayrolldeclarations.CountryFloat16) AS IngLbPh,
SUM(hrpayrolldeclarations.CountryFloat18) AS EHPUitk, SUM(hrpayrolldeclarations.CountryFloat19) AS EHLnBestKar,
SUM(hrpayrolldeclarations.CountryFloat20) AS EHSpln, SUM(hrpayrolldeclarations.CountryFloat21) AS EHSpPr,
SUM(hrpayrolldeclarations.CountryFloat22) AS EHLnNat, SUM(hrpayrolldeclarations.CountryFloat23) AS EHFeest,
SUM((CASE WHEN hrpayrolldeclarations.PayrollYear >= 2007 THEN hrpayrolldeclarations.CountryFloat26 ELSE 0 END)) AS
EHGebrAuto, SUM(hrpayrolldeclarations.CountryFloat24) AS EHBmVerg, SUM(hrpayrolldeclarations.CountryFloat25) AS
EHVUT, SUM(hrpayrolldeclarations.CountryFloat30) AS AVOnd, SUM((CASE WHEN hrpayrolldeclarations.PayrollYear < 2007
THEN hrpayrolldeclarations.CountryFloat26 ELSE 0 END)) AS AVBetOv, SUM((CASE WHEN hrpayrolldeclarations.PayrollYear
< 2007 THEN hrpayrolldeclarations.CountryFloat27 ELSE 0 END)) AS AVLgdWerkl,
SUM(hrpayrolldeclarations.CountryFloat28) AS AVArboNP, SUM(hrpayrolldeclarations.CountryFloat29) AS AVZeev,
SUM(hrpayrolldeclarations.CountryFloat5) AS PrWAOAof, SUM(hrpayrolldeclarations.CountryFloat7) AS PrWAOAok,
SUM(hrpayrolldeclarations.CountryFloat9) AS PrAwf, SUM(hrpayrolldeclarations.CountryFloat11) AS PrWgf,
SUM(hrpayrolldeclarations.CountryFloat15) AS VergZvw, SUM(hrpayrolldeclarations.CountryFloat14) AS PrZvw,
SUM(hrpayrolldeclarations.CountryFloat13) AS PrUfo, SUM(hrpayrolldeclarations.CountryFloat32) AS AghKort, SUM((CASE
WHEN hrpayrolldeclarations.PayrollYear < 2007 THEN (hrpayrolldeclarations.CountryFloat16 +
hrpayrolldeclarations.CountryFloat18 + hrpayrolldeclarations.CountryFloat19 + hrpayrolldeclarations.CountryFloat20 +
hrpayrolldeclarations.CountryFloat21 + hrpayrolldeclarations.CountryFloat25 + hrpayrolldeclarations.CountryFloat22 +
hrpayrolldeclarations.CountryFloat23 + hrpayrolldeclarations.CountryFloat24 - hrpayrolldeclarations.CountryFloat26 -
hrpayrolldeclarations.CountryFloat27 - hrpayrolldeclarations.CountryFloat28 - hrpayrolldeclarations.CountryFloat30 -
hrpayrolldeclarations.CountryFloat29 - hrpayrolldeclarations.CountryFloat32 + hrpayrolldeclarations.CountryFloat5 +
hrpayrolldeclarations.CountryFloat7 + hrpayrolldeclarations.CountryFloat9 + hrpayrolldeclarations.CountryFloat11 +
hrpayrolldeclarations.CountryFloat13 + hrpayrolldeclarations.CountryFloat14) ELSE (hrpayrolldeclarations.CountryFloat16
+ hrpayrolldeclarations.CountryFloat18 + hrpayrolldeclarations.CountryFloat19 + hrpayrolldeclarations.CountryFloat20 +
hrpayrolldeclarations.CountryFloat21 + hrpayrolldeclarations.CountryFloat25 + hrpayrolldeclarations.CountryFloat22 +
hrpayrolldeclarations.CountryFloat23 + hrpayrolldeclarations.CountryFloat24 + hrpayrolldeclarations.CountryFloat26 -
hrpayrolldeclarations.CountryFloat28 - Hrpayrolldeclarations.CountryFloat30 - hrpayrolldeclarations.CountryFloat29 -
Hrpayrolldeclarations.CountryFloat32 + hrpayrolldeclarations.CountryFloat5 + hrpayrolldeclarations.CountryFloat7 +
hrpayrolldeclarations.CountryFloat9 + hrpayrolldeclarations.CountryFloat11 + hrpayrolldeclarations.CountryFloat13 +
hrpayrolldeclarations.CountryFloat14) END)) AS Total, SUM(0) AS Kolom3, SUM(0) AS Kolom4,
SUM(hrpayrolldeclarations.CountryFloat39) AS Overwerk, SUM(hrpayrolldeclarations.CountryFloat33) AS VakBsl,
```

```

SUM(hrpayrolldeclarations.CountryFloat34) AS OpgRchtVakBsl, SUM(hrpayrolldeclarations.CountryFloat35) AS ExtrSal,
SUM(hrpayrolldeclarations.CountryFloat36) AS OpgRchtExtrSal, SUM(hrpayrolldeclarations.CountryFloat49) AS Reisk,
SUM(hrpayrolldeclarations.CountryFloat40) AS AantSV, SUM(hrpayrolldeclarations.CountryFloat41) AS AantVerlU,
MAX(CASE WHEN hrpayrolldeclarations.status = 'P' THEN 1 ELSE 0 END) AS Processed,
MAX(hrpayrolldeclarations.CountryTest1) AS DeclarationType, MAX(hrpayrolldeclarations.CountryInt1) AS
VolgnummerInzending, MAX(hrpayrolldeclarations.ReferenceNumber) AS IncomeTaxNumber
FROM hrpayrolldeclarations
LEFT JOIN humres ON humres.res_id = hrpayrolldeclarations.res_id
WHERE hrpayrolldeclarations.PayrollYear='2008'
AND hrpayrolldeclarations.countrytest1 IN ('', 'V', 'A', 'C')
GROUP BY hrpayrolldeclarations.ReferenceNumber, hrpayrolldeclarations.CountryVarchar12, hrpayrolldeclarations.period,
hrpayrolldeclarations.Frequency, hrpayrolldeclarations.sequence, hrpayrolldeclarations.CountryTest1,
hrpayrolldeclarations.PayrollYear
ORDER BY IncomeTaxNumber2, NmIp, Period, Frequency, Sequence, Type, PayrollYear

```



June 2007



HE1710EN04

www.exactsoftware.com