

Product Update 393

Database Documentation | System



Exact[®]
software



product update 393

Database Documentation | System

The information provided in this manual is intended for internal use by or within the organization of the customer only. Exact Group B.V. has carefully selected the content of this document. However, the content may not always represent reality or may become out-dated. Information may be changed or updated without notice. Exact Group B.V. may also make improvements and/or changes in the products, prices and/or the programs described in this manual at any time without notice.

Exact Group B.V. shall not be liable for the accuracy of any of the examples included and procedures described in this document, nor shall Exact be liable for any ensuing damage or loss of any nature whatsoever arising from or relating to its use.

No part of this manual may be reproduced, published and/or transmitted in any form or in any way, electronically, by print photocopy, microfilm or any other means, without the prior written consent of Exact Group B.V.

© Copyright Exact Group B.V. All rights reserved. All trademarks mentioned herein belong to their respective owners. Exact and Exact Software are a registered trademarks of Exact Group B.V.

Preface

To provide a better service for making reports or integrated business solutions, Exact has started with describing the database model of Exact Globe and e-Synergy. Since the Exact Globe product line and the e-Synergy product line are based on the same database model, this manual is applicable to both product lines. The documentation of the database model is intended for a user on consultant level who knows how Exact Globe or e-Synergy works and has some knowledge about SQL database structures, but lacks sufficient knowledge and information about the ExactGlobe or e-Synergy database structure when making reports or integrated business solutions.

The following information will be provided for each table discussed:

1. A brief description of the purpose of the table

Most tables have a single purpose. Some tables have multiple purposes.

2. The fields of the table

What is stored in the field?

What this field is used for

3. The functionalities of the table

Some tables have multiple purposes. Per table, the different functionalities (if available) are described.

4. The technical specifications of the fields in the table

This information can be useful in making reports or business solutions.

5. Standard SQL queries

With some standard SQL queries, it will be easy to retrieve the most commonly used data. The standard SQL queries supplied can also be used as the basis for extended or specific SQL queries used in reports and business solutions.

The database tables described in this manual are based on version 380. It is Exact Software's intention to keep the documentation up to date with the latest developments.

Contents


Preface	III
Chapter 1: ItemProcessTypes - Process types	3
1.1 General description	3
1.2 ItemProcessTypes field details	3
Chapter 2: Search templates	7
Chapter 3: KeySets - KeySets	11
Chapter 4: XML Server	15
4.1 4.1. XMLTopicDefinitions - XMLTopicDefinitions	15
4.2 XMLEvents - XML Events	15
4.2.1. General Description	15
4.2.2. XMLEvents field details	15
Chapter 5: Relation tables	19
Chapter 6: BacoSettings - BacoSettings	23
6.1 General description	23
6.2 BacoSettings field details	23
Chapter 7: TaxSchedule - Tax schedule	27
7.1 General description	27
7.2 TaxSchedule field details	27

Chapter 8: Territories - Territories	33
8.1 General description	33
8.2 Territories field details	33
Chapter 9: IncoTermCodes - Incoterm codes	37
9.1 General description	37
9.2 IncoTermCodes field details	37
Chapter 10: IncoTermProperties - Incoterm properties	41
10.1 General description	41
10.2 IncoTermCodes field details	41
Chapter 11: IncoTermProperties - Incoterm properties	45
11.1 XML Server	45
11.2 IncoTermCodes field details	45
11.2.1 XML Events	45
11.3 BacoSettings	46
11.4 TaxSchedule	46
11.5 Territories	47
11.6 IncoTermCodes	48
11.7 IncoTermProperties	48
Chapter 12: Sample SQL queries	51
12.1 ItemProcessTypes	51
12.2 XML Server	51
12.3 BacoSettings	52
12.4 TaxSchedule	52
12.5 Territories	52
12.6 IncoTermCodes	52
12.7 IncoTermProperties	52



Chapter 1 | ItemProcessTypes - Process types

TEMPROCESSTYPES - PROCESS TYPES

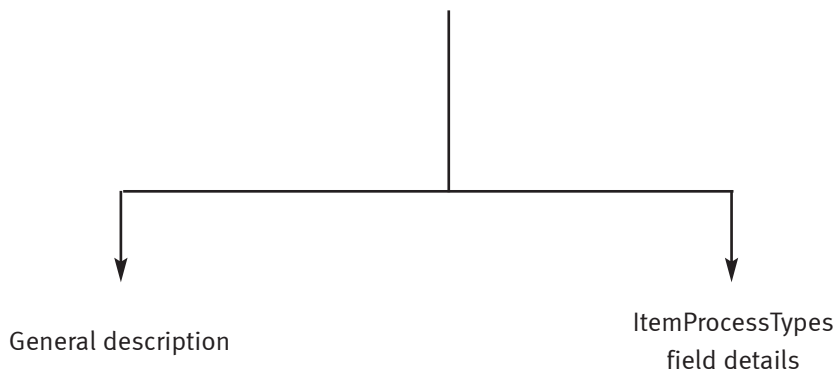

1. ItemProcessTypes - Process types

1.1 General Descriptions

The [ItemProcessTypes] table stores the document category setting for all the process types at system general settings.

Note! The [ItemProcessTypes] table is only used in e-Synergy.

1.2 ItemProcessTypes field details

Description - Description

The [ItemProcessTypes.Description] field stores the description of the process type.

Division - Division

The [ItemProcessTypes.Division] field is not used yet. It is added for future functionality.

DocCategory - Category

The [ItemProcessTypes.DocCategory] field stores the category of the document for the process type.

DocGroup - Group

The [ItemProcessTypes.DocGroup] field stores the category group of the document for the process type.

The [ItemProcessTypes.DocGroup] field refers to the [BacoDiscussionGroups.ID] field.

DocSecurity - Security level

The [ItemProcessTypes.DocSecurity] field stores the security level of the document for the process type.

DocSubCategory - Subcategory

The [ItemProcessTypes.DocSubCategory] field stores the subcategory of the document for the process type.

TaskPrio - Priority

The [ItemProcessTypes.TaskPrio] field stores the priority of the process type. The [ItemProcessTypes.TaskPrio] field refers to the [RequestPriorities.ID] field.

Type - Type

The [ItemProcessTypes.Type] field stores the type of the specific process.



Chapter 2 | Search templates

2. Search templates

The [SearchTemplates] and [SearchTemplateFields] tables are not used.



Chapter 3 | Section 3 KeySets - KeySets




3. KeySets - KeySets

The [KeySets] table is not used.



Chapter 4 | XML Server

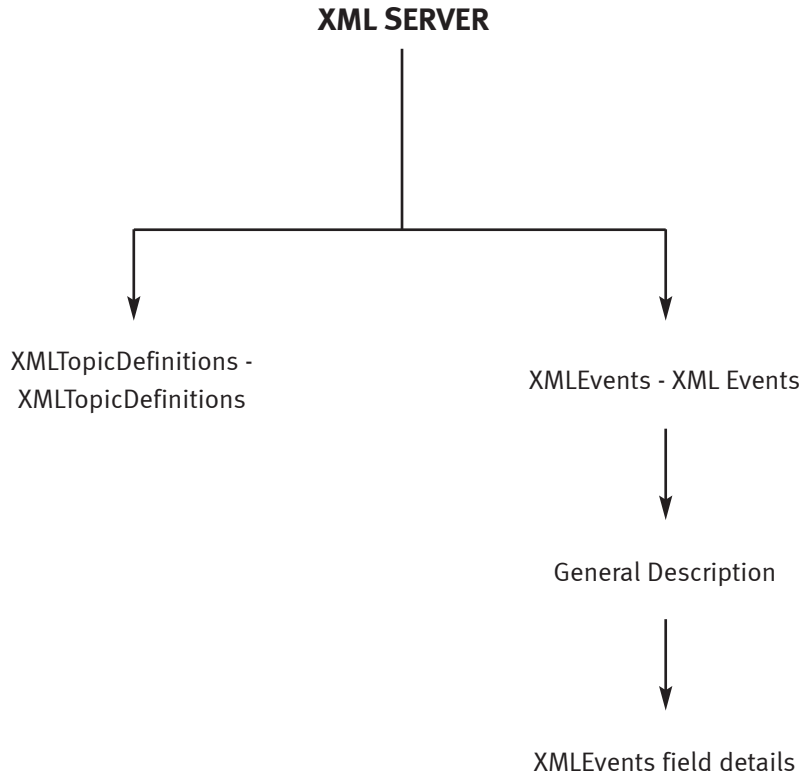

4. XML Server

4.1 *XMLTopicDefinitions - XMLTopicDefinitions*

The [XMLTopicDefinitions] table is not used.

4.2 *XMLEvents - XML Events*

4.2.1 General Description

The [XMLEvents] table stores the results of the XML events, which are the scheduled XML import or export that has been performed in batches.

4.2.2 XMLEvents field details

BatchID - Batch

The [XMLEvents.BatchID] field stores the batch ID of the XML import/export.

CompanyCode - Company

The [XMLEvents.CompanyCode] field stores the division code linked to the XML import/export. The [XMLEvents.CompanyCode] field refers to the [Bedryf.Bedmr] field.

DataKey - Key

The [XMLEvents.DataKey] field stores the key of the record.

DataKeyAlt - Alternative key

The [XMLEvents.DataKeyAlt] field stores the alternative key of the record.

Note! This field is only applicable for e-Synergy.NET.

Division - Division

The [XMLEvents.Division] field stores the division code of the current logon. The [XMLEvents.Division] field stores the numeric value of the [Bedryf.Bedmr] field. This field is not used yet. It is added for future functionality.

EventDate - Date

The [XMLEvents.EventDate] field stores the date for which the XML import/export has been performed.

EventDescription - Description

The [XMLEvents.EventDescription] field stores the message raised by the XML import/export.

EventType - Type

The [XMLEvents.EventType] field stores the type of the XML import/export. The possible values are:

Value	Description
0	Error
1	Warning
2	Message
4	Confirmation

HumresID - Resource

The [XMLEvents.HumresID] field stores the ID of the resource for which has performed the XML import/export. The [XMLEvents.HumresID] field refers to the [Humres.Res_ID] field.

ID - ID

The [XMLEvents.ID] field stores the system generated database record identification number. This field is not functionally used.

ImportExport - Source

The [XMLEvents.ImportExport] field stores the source of the XML event. The possible values are:

Value	Description
E	Export
I	Import

Node - Node

The [XMLEvents.Node] field stores the XML node involved in the XML import/export.

Topic - Topic

The [XMLEvents.Topic] field stores the XML topic involved in the XML import/export.

XMLNode - XML node

The [XMLEvents.XMLNode] field stores the whole node with containing data where the XML event occurred in. Note! This field is only applicable for e-Synergy.NET.



Chapter 5 | Relation tables


5. Relation tables

The [GUIDRelations], [StringRelations] and [IntegerRelations] tables are not used.



Chapter 6 | BacoSettings - BacoSettings

BACOSSETTINGS - BACOSSETTINGS

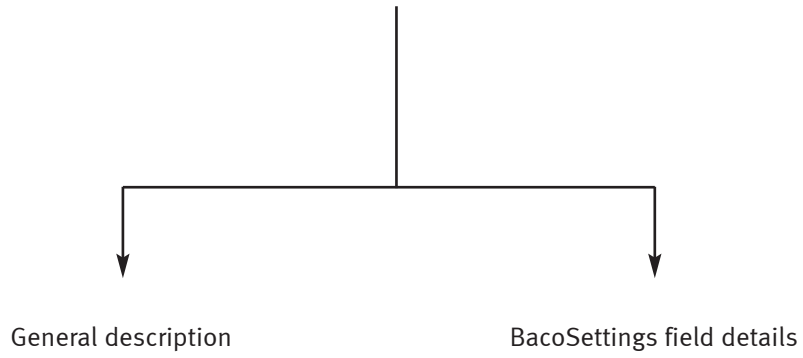

6. BacoSettings - BacoSettings

6.1 General description

The [BacoSettings] table stores all the system settings defined by users, company settings, as well as division-specific settings.BacoSettings field details.

6.2 BacoSettings field details

DateValue - Date

The [BacoSettings.DateValue] field stores the date defined for the system settings when [BacoSettings.ValueType] equals to 3.

Division - Division

The [BacoSettings.Division] field stores the division code. This division code is the division which a contract parameter is created for in the system. The [BacoSettings.Division] refers to the [ContractParameters.Division] field. For other settings, [BacoSettings.Division] is not used currently.

DoubleValue - Value

The [BacoSettings.DoubleValue] field stores the numeric values when [BacoSettings.ValueType] equals to 2.

LongValue - Value

The [BacoSettings.LongValue] field stores the integer values when [BacoSettings.ValueType] equals to 1.

SettingGroup - Setting Group

The [BacoSettings.SettingGroup] field stores the setting groups based on the various setting types. For example, for a user setting type, several setting groups can be used to group the settings. In this scenario, setting groups based on the user names are used. This field is not functionally used at this moment.

SettingName - Name

The [BacoSettings.SettingName] field stores the setting name.

SettingType - Type

The [BacoSettings.SettingType] field stores the setting types. The [BacoSettings.SettingType] field can store one of the following values:

Value	Description
0	General
1	Division
2	User
8	Customer

StringValue - Value

The [BacoSettings.StringValue] field stores the string values when [BacoSettings.ValueType] equals to 0.

ValueType - Type

The [BacoSettings.ValueType] field stores a number that indicates the types of value. The [BacoSettings.ValueType] field can store one of the following values:

Value	Description
0	String
1	Integer
2	Numeric
3	Date
4	XML


XMLValue - XML Value

The [BacoSettings.XMLValue] field generally stores the XML values for webparts settings.



Chapter 7 | BacoSettings - BacoSettings

TAXSCHEDULE - TAX SCHEDULE

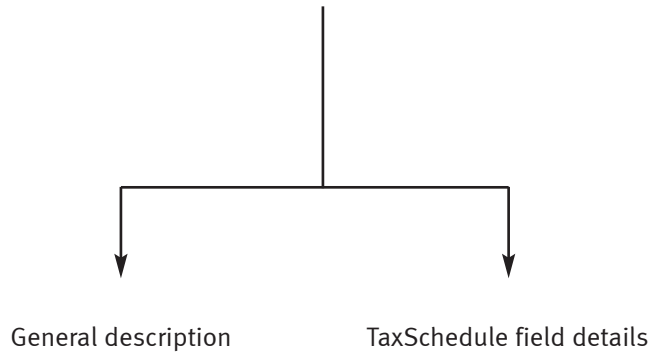

7. TaxSchedule - Tax schedule

7.1 General description

The [TaxSchedule] table stores information of taxes that will be used for tax calculations.

7.2 TaxSchedule field details

Account - Account

The [TaxSchedule.Account] field stores the main identifying code for the account. The [TaxSchedule.Account] field is the reference field for almost all the tables that need a reference to the [TaxSchedule] table.

AccountClassification - Account classification

The [TaxSchedule.AccountClassification] field stores the classification code of the account. This can be an account type specific or general classification. This field is similar to the [CICMPY.ClassificationID].

City - City

The [TaxSchedule.City] field stores the city code of the tax schedule.

CompanyCode - Company code

The [TaxSchedule.CompanyCode] field stores the code of the company.

Country - Country

The [TaxSchedule.Country] field stores the country code of the tax schedule.

County - County

The [TaxSchedule.County] field stores the county code of the tax schedule.

Division - Division

The [TaxSchedule.Division] field stores the division code of the company.

ID - ID

The [TaxSchedule.ID] field stores the ID of the tax schedule.

ItemClass - Item class

The [TaxSchedule.ItemClass] field stores the additional information for the item the tax schedule. This makes it possible to define specific properties for the item.

ItemCode - Item code

The [TaxSchedule.ItemCode] field stores the code of the item that is taxable.

Postcode - Postcode

The [TaxSchedule.Postcode] field stores the postcode of the tax schedule.

State - State

The [TaxSchedule.State] field stores the state code of the tax schedule.

SysCreated - System created date and time

The [TaxSchedule.SysCreated] field stores the system creation date and time of the tax schedule.

SysCreator - System creator

The [TaxSchedule.SysCreator] field stores the ID of the user who created the tax schedule.

Sysguid - Sysguid

The [TaxSchedule.Sysguid] field stores the Guid ID field generated by the system upon creation of the accounts.

SysModified - System modified date and time

The [TaxSchedule.SysModified] field stores the system modification date and time of the tax schedule.

SysModifier - System modifier

The [TaxSchedule.SysModifier] field stores the ID of the user to modified the tax schedule.

TaxCode1 - Tax code 1

The [TaxSchedule.TaxCode1] field stores the tax code 1 of the tax schedule.

TaxCode2 - Tax code 2

The [TaxSchedule.TaxCode2] field stores the tax code 2 of the tax schedule.

TaxCode3 - Tax code 3

The [TaxSchedule.TaxCode3] field stores the tax code 3 of the tax schedule.

TaxCode4 - Tax code 4

The [TaxSchedule.TaxCode4] field stores the tax code 4 of the tax schedule.

TaxCode5 - Tax code 5

The [TaxSchedule.TaxCode5] field stores the tax code 5 of the tax schedule.

TaxItemClassification - Tax item classification

The [TaxSchedule.TaxItemClassification] field stores the classification code of the items that will be taxed.

TaxPerUnit1 - Tax per unit 1

The [TaxSchedule.TaxPerUnit1] field stores the tax percentage of [TaxSchedule.TaxCode1] that will be taxable for each unit of the item.

TaxPerUnit2 - Tax per unit 2

The [TaxSchedule.TaxPerUnit2] field stores the tax percentage of [TaxSchedule.TaxCode2] that will be taxable for each unit of the item.

TaxPerUnit3 - Tax per unit 3

The [TaxSchedule.TaxPerUnit3] field stores the tax percentage of [TaxSchedule.TaxCode3] that will be taxable for each unit of the item.

TaxPerUnit4 - Tax per unit 4

The [TaxSchedule.TaxPerUnit4] field stores the tax percentage of [TaxSchedule.TaxCode4] that will be taxable for each unit of the item.

TaxPerUnit5 - Tax per unit 5

The [TaxSchedule.TaxPerUnit5] field stores the tax percentage of [TaxSchedule.TaxCode5] that will be taxable for each unit of the item.

Timestamp - Timestamp

The [TaxSchedule.Timestamp] field contains a system generated timestamp. The timestamp field is regenerated upon every change in the accounts. This field is mainly used for replication purposes.

Type - Type


The [TaxSchedule.Type] field stores the transaction type of the tax schedule.

Value	Description
P	Purchase
S	Sales
B	Both



Chapter 8 | Territories - Territories

TERRITORIES - TERRITORIES

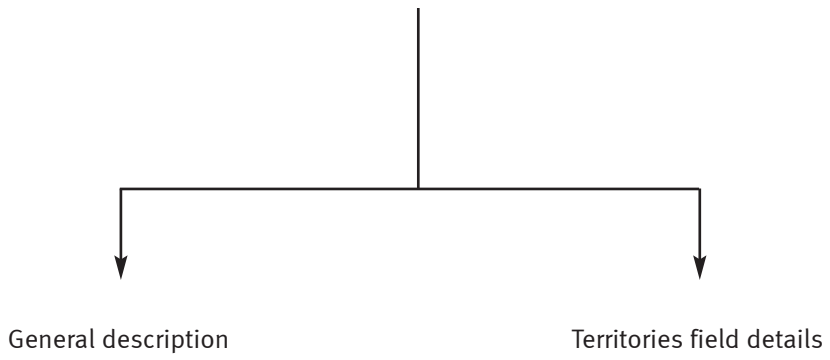

8. Territories - Territories

8.1 General description

The [Territories] table stores information of the territories whereby sales employees can also be linked to the territories.

8.2 Territories field details

Description - Description

The [Territories.Description] field stores the main description of the territory.

Description_0 - Description 0

The [Territories.Description_0] field stores the first optional description for the territory.

Description_1 - Description 1

The [Territories.Description_1] field stores the second optional description for the territory.

Description_2 - Description 2

The [Territories.Description_2] field stores the third optional description for the territory.

Description_3 - Description 3

The [Territories.Description_3] field stores the fourth optional description for the territory.

Description_4 - Description 4

The [Territories.Description_4] field stores the fifth optional description for the territory.

ID - ID

The [Territories.ID] field stores the ID of the territory.

Syscreated - System created date and time

The [Territories.Syscreated] field stores the system created date and time for the territory.

Syscreator - System creator

The [Territories.Syscreator] field stores the ID of the user who created the territory.

Sysguid - Sysguid

The [Territories.Sysguid] field stores the Guid ID field generated by the system upon creation of the territory.

Sysmodified - System modified date and time

The [Territories.Sysmodified] field stores the system modification date and time for the territory.

Sysmodifier - System modifier

The [Territories.Sysmodifier] field stores the ID of the user who modified the territory.


TerritoryCode - Territory code

The [Territories.TerritoryCode] field stores the code of the territory.



Chapter 9 | IncoTermCodes - Incoterm codes

INCOTERMCODES - INCOTERM CODES

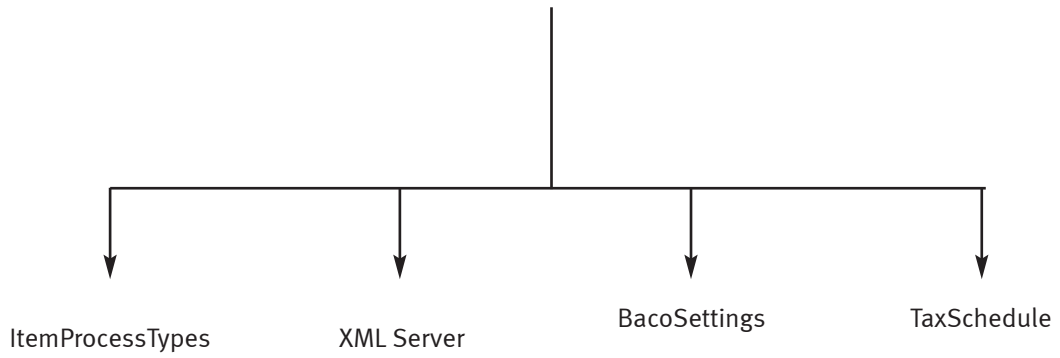

9. IncoTermCodes - Incoterm codes

9.1 General description

The [IncoTermCodes] table stores the codes and descriptions of the Incoterms.

9.2 IncoTermCodes field details

Active - Active

The [IncoTermCodes.Active] field indicates whether the Incoterm code is active. The value "1" indicates that the Incoterm code is active. The value "0" indicates that the Incoterm code is inactive.

Code - Code

The [IncoTermCodes.Code] field stores the code of the Incoterm.

Description - Description

The [IncoTermCodes.Description] field stores the description of the Incoterm code.

ID - ID

The [IncoTermCodes.ID] field contains a unique identifier (ID) for each transaction line in the [IncoTermCodes] table. This field is not functionally used.

Syscreated - System created date and time

The [IncoTermCodes.Syscreated] field stores the date and time the Incoterm code was created.

Syscreator - Creator

The [IncoTermCodes.Syscreator] field stores the ID of the resource who created the Incoterm code. The [IncoTermCodes.Syscreator] field refers to the [Humres.Res_ID] field.

Sysguid - System guid

The [IncoTermCodes.Sysguid] field stores the GuidID generated by the system upon creation of the Incoterm code.

Sysmodified - System modified date and time

The [IncoTermCodes.Sysmodified] field stores the date and time the Incoterm code was last modified. Initially, this field contains the creation date and time.


Sysmodifier - Modifier

The [IncoTermCodes.Sysmodifier] field stores the ID of the resource who last modified the Incoterm code. Initially, this field contains the creator that is stored in the [IncoTermCodes.Syscreator] field. The [IncoTermCodes.Sysmodifier] field refers to the [Humres.Res_ID] field.



Chapter 10 | IncoTermProperties - Incoterm properties

INCOTERMPROPERTIES - INCOTERM PROPERTIES

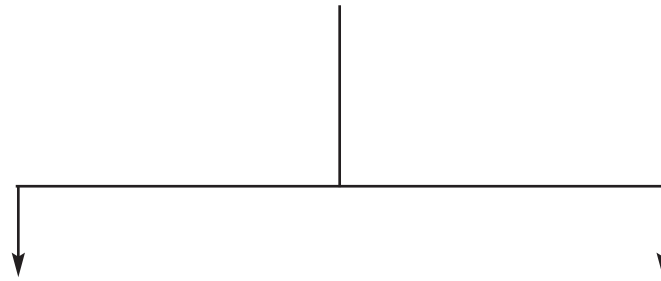

General description

IncoTermProperties field details

10. IncoTermProperties - Incoterm properties

10.1 General description

The [IncoTermProperties] table stores the properties of the Incoterm for the selected Incoterm code whereby there can be many Incoterm properties for one Incoterm code. The [IncoTermProperties] table stores the additional Incoterm codes for the selected [IncoTermCodes.Code] field.

10.2 IncoTermProperties field details

Code - Code

The [IncoTermProperties.Code] field stores the code of the Incoterm property.

Description - Description

The [IncoTermProperties.Description] field stores the description of the Incoterm property.

ID - ID

The [IncoTermProperties.ID] field contains a unique identifier (ID) for each transaction line in the [IncoTermProperties] table. This field is not functionally used.

ParentCode - Parent code

The [IncoTermProperties.ParentCode] field stores the code of the parent Incoterm code. This field refers to the [IncoTermCodes.Code] field.

Syscreated - Created date and time

The [IncoTermProperties.Syscreated] field stores the date and time the Incoterm property was created.

Syscreator - Creator

The [IncoTermProperties.Syscreator] field stores the ID of the resource who created the Incoterm property.

The [IncoTermProperties.Syscreator] field refers to the [Humres.ID] field.

Sysguid - System GUID

The [IncoTermProperties.Sysguid] field stores the GuidID generated by the system upon creation of the Incoterm property.

Sysmodified - Modified date and time


The [IncoTermProperties.Sysmodified] field stores the date and time the Incoterm property was last modified. Initially, this field contains the creation date and time.

Sysmodifier - Modifier

The [IncoTermProperties.Sysmodifier] field stores the ID of the resource who last modified the Incoterm property. Initially, this field contains the creator that is stored in the [IncoTermProperties.Syscreator] field. The [IncoTermProperties.Sysmodifier] field refers to the [Humres.ID] field



Chapter 11 | Field properties

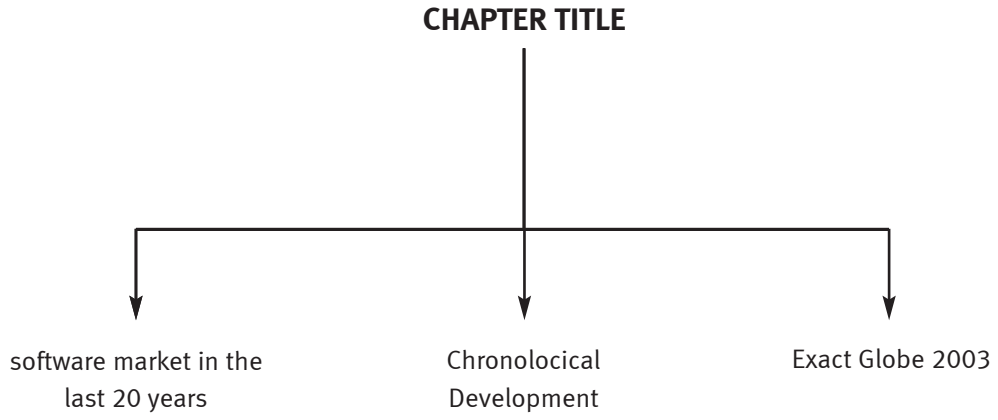

11. Field properties

This section will give a technical overview of the database fields and the way they are used. If the field described has a reference to another table or field, the referenced field is also mentioned.

11.1 ItemProcessTypes

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Description	Description		nvarchar	60	Yes	4243	
Division	Division		smallint		Yes	64	
DocCategory	Category		nvarchar	30	Yes	1205	
DocGroup	Group	BacoDiscussionGroups.ID	int		Yes	2560	
DocSecurity	Security level		int		No	209	(10)
DocSubCategory	Subcategory		nvarchar	30	Yes	83	
TaskPrio	Priority	RequestPriorities.ID	int		No	3217	(3)
Type	Type		int		No	3801	

11.2 XML Server

11.2.1 XMLEvents

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
BatchID	Batch		int		No	4007	
CompanyCode	Company	bedryf.bednr	char	3	No	9608	
DataKey	Key		varchar	40	Yes	5330	
DataKeyAlt	Alternative key		varchar	40	Yes		
Division	Division		smallint		Yes		
EventDate	Date		datetime		No	8516	getdate()
EventDescription	Description		varchar	1000	Yes	4243	
EventType	Type		int		No	3801	
HumresID	Resource	humres.res_id	int		No	12	
ID	ID		uniqueidentifier		No	31212	newid()
ImportExport	Source		char	1	Yes		
Node	Node		varchar	30	Yes	0	
Topic	Topic		varchar	30	Yes	7062	
XMLNode	XML node		text		Yes		

11.3 BacoSettings

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
DateValue	Date		datetime		Yes		
Division	Division	ContractParameters.Division	smallint		Yes		
DoubleValue	Value		float		Yes		
LongValue	Value		int		Yes		
SettingGroup	Setting Group		char	40	No		
SettingName	Name		varchar	60	No		
SettingType	Type		int		No		(0)
StringValue	Value		char	255	Yes		
ValueType	Type		int		No		(0)
XMLValue	XML Value		text		Yes		

11.4 TaxSchedule

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Account	Account		Uniqueidentifier	16	Yes		
AccountClassification	Account classification		Char	3	Yes	35923	
City	City		Varchar	100	Yes		
CompanyCode	Company code		Char	3	Yes		
Country	Country		Char	3	Yes		
County	County		Varchar	100	Yes		
Division	Division		Smallint	2	Yes		
ID	ID		Int	4	No		
ItemClass	Item class		Varchar	30	Yes	222	
ItemCode	Item code		Varchar	30	Yes		
Postcode	Postcode		Char	20	Yes		
State	State		Char	3	Yes		
Syscreated	System created date & time		Datetime	8	No		
Syscreator	System creator		Int	4	No		
Sysguid	Sysguid		Uniqueidentifier	16	No		
Sysmodified	System modified date & time		Datetime	8	No		
Sysmodifier	System modifier		Int	4	No		
TaxCode1	Tax code 1		Char	3	No		

TaxSchedule

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
TaxCode2	Tax code 2		Char	3	Yes		
TaxCode3	Tax code 3		Char	3	Yes		
TaxCode4	Tax code 4		Char	3	Yes		
TaxCode5	Tax code 5		Char	3	Yes		
TaxItemClassification	Tax item classification		Int	4	Yes		
TaxPerUnit1	Tax per unit 1		Float	8	Yes		
TaxPerUnit2	Tax per unit 2		Float	8	Yes		
TaxPerUnit3	Tax per unit 3		Float	8	Yes		
TaxPerUnit4	Tax per unit 4		Float	8	Yes		
TaxPerUnit5	Tax per unit 5		Float	8	Yes		
Timestamp	Timestamp		Timestamp	8	No		
Type	Type		Char	1	Yes		

11.5 Territories

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Description	Description		Varchar	60	No	4243	
Description_0	Description 0		Varchar	60	Yes	4243	
Description_1	Description 1		Varchar	60	Yes	4243	
Description_2	Description 2		Varchar	60	Yes	4243	
Description_3	Description 3		Varchar	60	Yes	4243	
Description_4	Description 4		Varchar	60	Yes	4243	
ID	ID		Int		No		
Syscreated	System created date & time		Datetime	8	No		
Syscreator	System creator		Int	4	No		0
Sysguid	System GUID		Uniqueidentifier	16	No		
Sysmodified	System modified date & time		Datetime	8	No		
Sysmodifier	System modifier		Int	4	No		0
TerritoryCode	Territory code		Char	5	No	36158	

11.6 IncoTermCodes


Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Active	Active		Bit	1	No		1
Code	Code		Char	3	No		
Description	Description		Varchar	60	Yes		
ID	ID		Int		No		
Syscreated	Created date & time		Datetime		No		
Syscreator	Creator		Int		No		0
Sysguid	System GUID		Uniqueidentifier		No		
Sysmodified	Modified date & time		Datetime		No		
Sysmodifier	Modifier		Int		No		0

11.7 IncoTermProperties

Field name	Description	Reference	Data type	Length	Nullable	Term ID	Default
Code	Code		Varchar	60	No		
Description	Description		Varchar	60	Yes		
ID	ID		Int		no		
ParentCode	Parent code		Char	3	No		
Syscreated	Created date & time		Datetime		No		
Syscreator	Creator		Int		No		0
Sysguid	System GUID		Uniqueidentifier		No		
Sysmodified	Modified date & time		Datetime		No		
Sysmodifier	Modifier		Int		No		0



Chapter 12 | Sample SQL queries

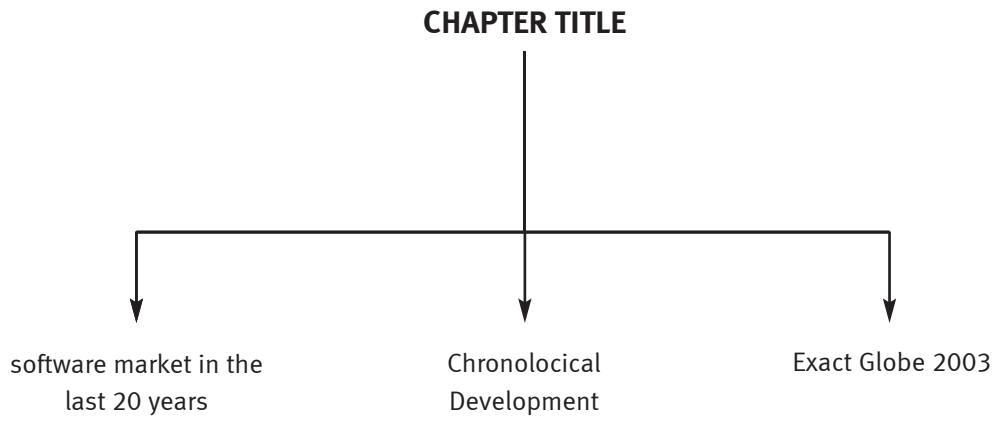

12. Sample SQL queries

This section will list some SQL queries for retrieving data from the System tables. These queries can also be used as the basis for more complex reports or business solutions. Some basic knowledge of the Transact-SQL syntax is required to work with these examples.

12.1 ItemProcessTypes

1. Query to retrieve all the process types.

```
SELECT ItemProcessTypes.Type, ItemProcessTypes.Description, BacoDiscussionGroups.Description,
ItemProcessTypes.DocSecurity, ItemProcessTypes.TaskPrio, RequestPriorities.Description
FROM ItemProcessTypes
LEFT OUTER JOIN BacoDiscussionGroups ON ItemProcessTypes.DocGroup = BacoDiscussionGroups.ID
INNER JOIN RequestPriorities ON ItemProcessTypes.TaskPrio = RequestPriorities.ID
ORDER BY ItemProcessTypes.Type
```

12.2 XML Server

1. Query to select all results of the XML events based on division code '943' and batch ID between 3 and 52.

```
SELECT XMLEvents.Topic, XMLEvents.BatchID, humres.res_id, humres.fullname, COUNT(*) AS Messages, COUNT(CASE
WHEN XMLEvents.EventType = 0 THEN 0 END) AS Errors, MAX(XMLEvents.EventDate) AS Date
FROM XMLEvents
INNER JOIN humres ON XMLEvents.HumresID = humres.res_id
WHERE XMLEvents.CompanyCode = '943'
AND XMLEvents.BatchID BETWEEN 3 AND 52
GROUP BY XMLEvents.Topic, XMLEvents.BatchID, humres.res_id, humres.fullname
ORDER BY XMLEvents.BatchID DESC
```

2. Query to retrieve details of a particular batch ID '52'.

```
SELECT XMLEvents.ID, (CASE XMLEvents.EventType WHEN 0 THEN 'Error' WHEN 1 THEN 'Warning' WHEN 2 THEN 'Message'
END) AS Type, XMLEvents.EventDate, XMLEvents.Node, XMLEvents.DataKey, XMLEvents.EventDescription, (CASE
XMLEvents.EventType WHEN 0 THEN 4467 WHEN 1 THEN 3749 WHEN 2 THEN 1778 END) AS MessageTerm
FROM XMLEvents
WHERE XMLEvents.BatchID = '52'
ORDER BY XMLEvents.EventDate
```

12.3 BacoSettings

1. Query to display the system settings information of type 'General'.

```
SELECT TOP 101 SettingGroup, SettingName, ValueType, StringValue, LongValue, DoubleValue, DateValue FROM
BacoSettings WHERE SettingType=0 AND SettingGroup='general' ORDER BY SettingName
```

12.4 TaxSchedule

1. Query to display the details of the tax schedule where ID is "1".

```
SELECT * from TaxSchedule
WHERE 1=2
```

12.5 Territories

1. Query to display the details of the territory where TerritoryCode is "KL".

```
SELECT TOP 1 TerritoryCode
FROM Territories
ORDER BY TerritoryCode ASC
```

12.6 IncoTermCodes

1. Query to display the details of the Incoterm where Incoterm code is "CFR".

```
SELECT TOP 1 Code
FROM IncotermCodes
ORDER BY Code DESC
```

12.7 IncoTermProperties

1. Query to display the details of the Incoterm properties where Incoterm code is "CFR" and the Incoterm property is "F".

```
SELECT Code, Description
FROM IncoTermProperties
WHERE IncoTermProperties.ParentCode = 'CFR'
AND IncoTermProperties.Code = 'F'
```

